

Specification of Quartz Crystal Units

1	NDK Part Number	NX2016SA-32M-EXS00A-CS06465
2	Chipset Maker	Semtech
3	Application	LoRa
4	Chipset Name	SX127x
5	NDK Specification Number	EXS00A-CS06465
6	Type	NX2016SA
7	Electrical Characteristics	

	Parameters	SYM.	Electrical Spec.				Notes
			min	typ	max	Units	
1	Nominal Frequency (f _{nom})	f _{nom}	32.000			MHz	
2	Overtone order	-	Fundamental			-	
3	Frequency tolerance	-	-10	-	+10	ppm at +25°C	
4	Frequency versus temperature characteristics *1.	-	-10	-	+10	ppm at -20 to +70°C	
		-	-30	-	+30	ppm at -40 to +85°C	
5	Equivalent Series Resistance	R _r	-	-	50	Ω IECπ -Network Series	
6	Load capacitance	CL	-	10	-	pF IECπ -PI-Network	
7	Level of drive	-	-	10	100	μW	
8	Shunt Capacitance	C ₀	-30%	0.6	+30%	pF	
9	Motional Capacitance	C ₁	-30%	1.89	+30%	fF	
10	Motional Inductance	L ₁	-30%	13.14	+30%	mH	
11	Pulling sensitivity	S	-30%	8.41	+30%	ppm/pF *2	
12	Aging	-	-3	-	+3	ppm	1st year (at +25°C)
		-	-5	-	+5		5 years (at +25°C)
		-	-10	-	+10		10 years (at +25°C)
		-	-15	-	+15		20 years (at +25°C)
13	Insulation resistance	-	500	-	-	Ω *3	
14	Operating temperature range	-	-40	-	+85	°C	
15	Storage temperature range	-	-40	-	+85	°C	
16	Air-tightness	-	-	-	1.1x10 ⁻⁹	Pa.m ³ /s Helium leak detector	
17	Recommended oscillation margin	-	600	-	-	Ω *4	
18	G-sensitivity	-	-	-	2	ppb/G *5	

*1. The reference temperature shall be +25°C

*2. CL=10pF. This value is calculated by following formula.


$$S = (C_1 \times 1,000) / (2(C_0 + CL)^2) \text{ [ppm/pF]} \quad \text{Unit } C_0: [\text{pF}], C_1: [\text{fF}], CL: [\text{pF}]$$

*3. When terminal to terminal and terminal to cover were applied at DC100V ±15V.

*4. When the circuit does not have enough value as above, please contact us.

*5. When using NDK standard osc. circuit.

Dimension

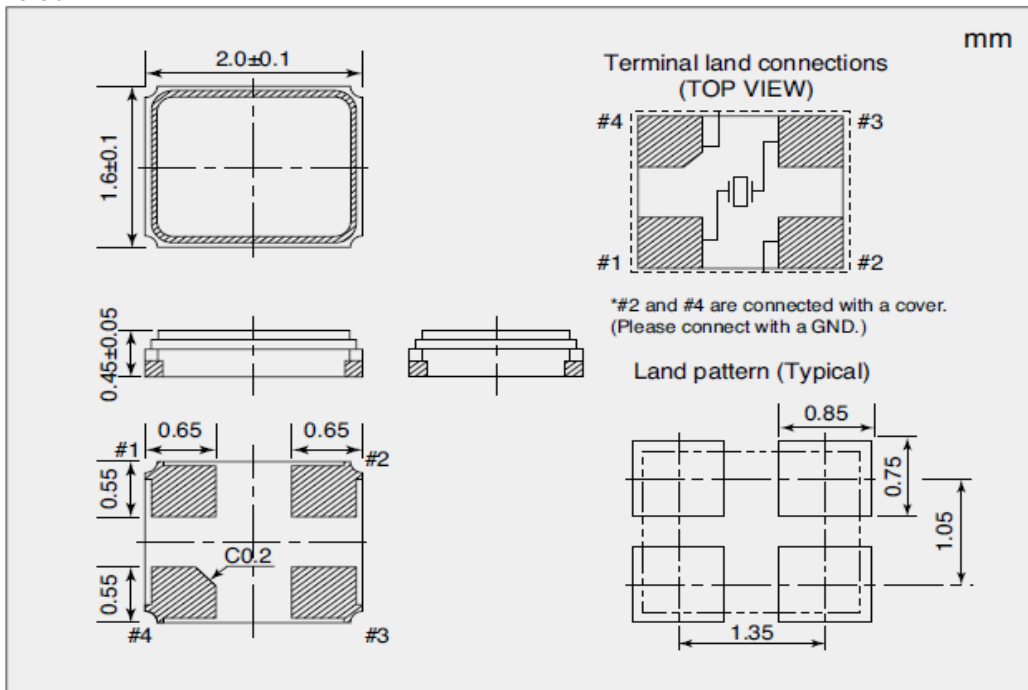

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [NDK](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [MP1-8.0](#) [99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [AB-11.0592MHZ](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFX TAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [ABM3B-10.000MHZ-K-T](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [ECS-80-18-30-JGN-TR](#) [17000](#)