



RoHS Compliant
Directive 2011/65/EU

REFERENCE SPECIFICATION

Customer: Atmel Shanghai

| | |
|-----------------------|----------------|
| Item : | CRYSTAL UNIT |
| Type: | NX3215SA |
| Nominal Frequency: | 32.768kHz |
| Customer's Spec. No.: | --- |
| NDK Spec. No.: | EXS00A-MU00554 |

For your reference we submit this specification.
Please study and keep in your related document file.

Charge:

| | | |
|----------|-------------------------------------|--|
| Sales | NDK-SH : Cao Lei | Tel. 86-21-6278-5115 e-Mail : caolei@sh.ndk.com |
| Engineer | 1 st Eng. Dept.: Hasuike | Tel. 81-4-2900-6632 e-Mail : hasuike@ndk.com |

Revision Record

| Rev. | Date | Items | Contents | Approved | Checked | Drawn |
|------|-------------|-------|----------|----------|---------|-----------|
| --- | 26.May.2014 | Issue | --- | S.Sunaba | --- | Y.Hasuike |

1. Customer's Spec. No. : ---
2. NDK Spec. No. : EXS00A-MU00554
3. Type : NX3215SA
4. Electrical Specifications

| | Parameters | SYM. | Electrical Spec. | | | | Notes |
|------|-----------------------------|----------------|------------------|-----|-------|----------------------|--|
| | | | MIN | TYP | MAX | UNITS | |
| 4.1 | Nominal Frequency | FL | 32.768 | | | kHz | - |
| 4.2 | Oscillation Mode | - | Fundamental | | | - | - |
| 4.3 | Load Capacitance | CL | 12.5 | | | pF | Network Analyzer (CNA-LF made in Transat corp.) |
| 4.4 | Frequency Tolerance | - | +/-20 | | | ppm | at +25+/-3°C ,Not include aging |
| 4.5 | Turning Point | - | +25+/-5°C | | | °C | - |
| 4.6 | Temperature coefficient | - | - | - | -0.04 | ppm/ °C ² | - |
| 4.7 | Operating Temperature range | - | -40 | ~ | +125 | °C | - |
| 4.8 | Aging | - | +/-3 | | | ppm | 1 st year (at 25°C) |
| 4.9 | Drive level | DL | --- | 0.1 | 0.5 | uW | - |
| 4.10 | Equivalent Resistance | R _R | - | - | 80 | kΩ | Network Analyzer (CNA-LF made in Transat corp.) |
| 4.11 | Shunt Capacitance | C ₀ | 0.5 | 1.0 | 1.5 | pF | Network Analyzer (CNA-LF made in Transat corp.) |
| 4.12 | Insulation Resistance | - | 500 | - | - | MΩ | Terminal to terminal insulation resistance also terminal to cover insulation resistance must be500MΩ (Min.) when DC100V ±15V is applied. |
| 4.13 | Storage Temperature range | - | -40 | ~ | +125 | °C | - |
| 4.14 | Motional Capacitance | C ₁ | 2.0 | 4.0 | 6.0 | fF | Network Analyzer (CNA-LF made in Transat corp.) |

5. Examination results document

Since a performance is guaranteed, an examination results document does not submit.

6. Application drawing

- 6.1 Dimension drawing : EXD14B-00462
- 6.2 Taping and reel figure : EXK17B-00303
- 6.3 Holder marking : EXH11B-00422
- 6.4 Reel Packing : EEK17B-00015
- 6.5 Reliability assurance Item : EXS30B-00722

7. Notice

- 7.1 Order items are manufactured according to specification. As to conditions, which are not indicated in this specification and unpredictable such as applied condition and oscillation margin, please check them beforehand.
- 7.2 Unless we receive request for modification within 3 weeks from the issue date of this NDK specification sheet, we will supply products according to this specification. Also, if you'd like to modify specification of order, which has been placed with delivery request within 3 weeks from the issue data of this specification sheet, we would like to discuss with you separately.
- 7.3 In no event shall the company be liable for any product failure resulting from an inappropriate handling or operation of the product beyond the scope of its guarantee.
- 7.4 Where any change to the process condition is made due to the change(s) in the production line, inform personnel of the specifications.
- 7.5 Should this specification data give rise to any disputes relating to any intellectual property rights or any other rights of a third person, the company shall not indemnify anyone for any damage. Their disclosure must not be construed as the grant of a license to use any of the intellectual property rights owned by the company.
- 7.6 If you intend to use products listed on this specification for applications that may result in loss of life or assets (controls relating to safety, medical equipment, aeronautical equipment, space equipment, etc.), please do not fail to advise us of your intention beforehand.
- 7.7 In the company's production process whatever amount of ozone depleting substances (ODS) as specified in the Montreal protocol is not used.
- 7.8 Information contained in this specification must not be quoted, reproduced or used for other purposes including processing either in part or in full without obtaining prior approval from the company.
- 7.9 The appearance color and so on have a different case by purchasing it more than 2 suppliers of the component, but characteristic and reliability are guaranteed.
- 7.10 Crystal units will be damaged by ultrasonic welding process due to resonance of crystal wafer itself. NDK does not recommend using ultrasonic welding. If Ultra Sonic welding used, NDK strongly recommend verifying crystal unit damage by ultrasonic weld.

8. Prohibited items




Be sure to use the product under the following conditions. Otherwise, the characteristics deterioration or destruction of the product may result.

(1)Reflow soldering heat resistance


| | |
|----------------------|---------------------------|
| Peak temperature | : 265°C, 10 sec |
| Heating | : 230°C or higher, 30 sec |
| Preheating | : 150°C to 180°C, 120 sec |
| Reflow passage times | : twice |

(2)Manual soldering heat resistance

Pressing a soldering iron of 400°C on the terminal electrode for four seconds (twice) .

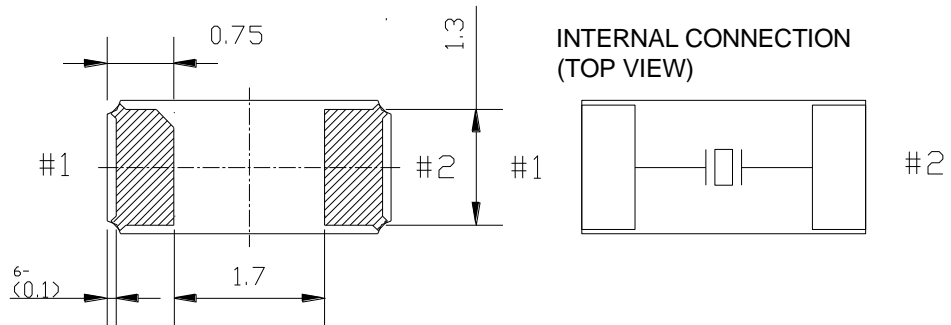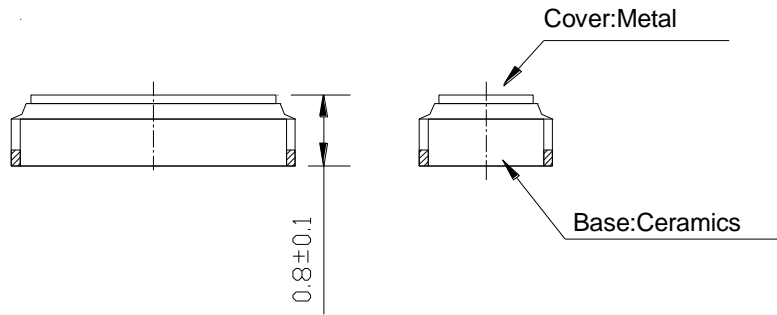
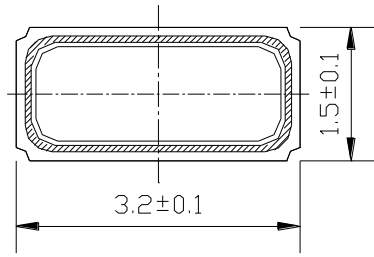


Recommended soldering pattern

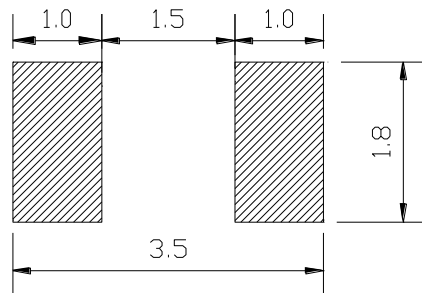



| | | | | | |
|----------|----------------|----------|---|------------------------------------|------|
| | Date of Revise | Charge | Approved | Reason | |
| B | 10.May.2012 | Hasuike | Matsudo | Add bilingual | |
| | Date | Name | Third Angle Projection | Tolerance | |
| Drawn | 30.Aug.2009 | Miyahara | Dimension:mm | ±0.2 | |
| Designed | 30.Aug.2009 | Miyahara | Title NX3215SA External Dimension | Drawing No. EXD14B-00462 | |
| Checked | --- | --- | | | Rev. |
| Approved | 30.Aug.2009 | K. Ueki | | | B |

NIHON DEMPA KOGYO CO., LTD.

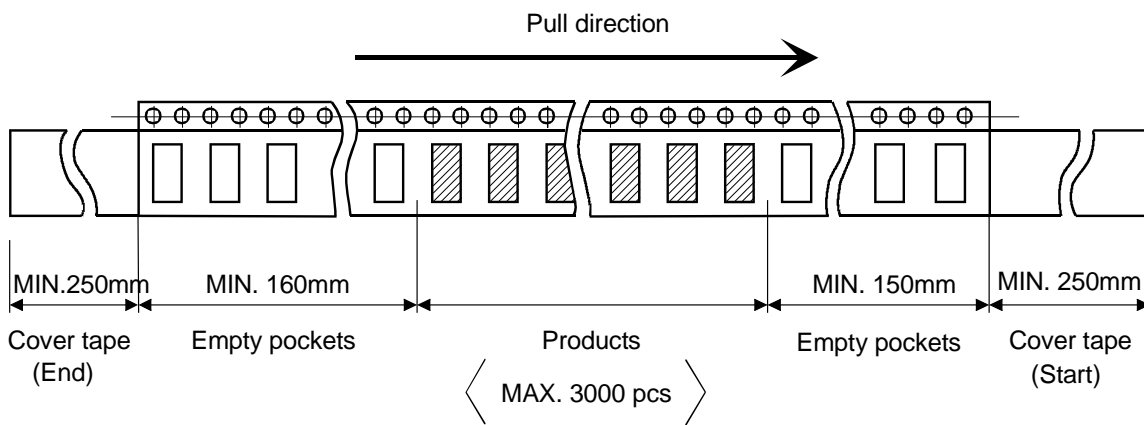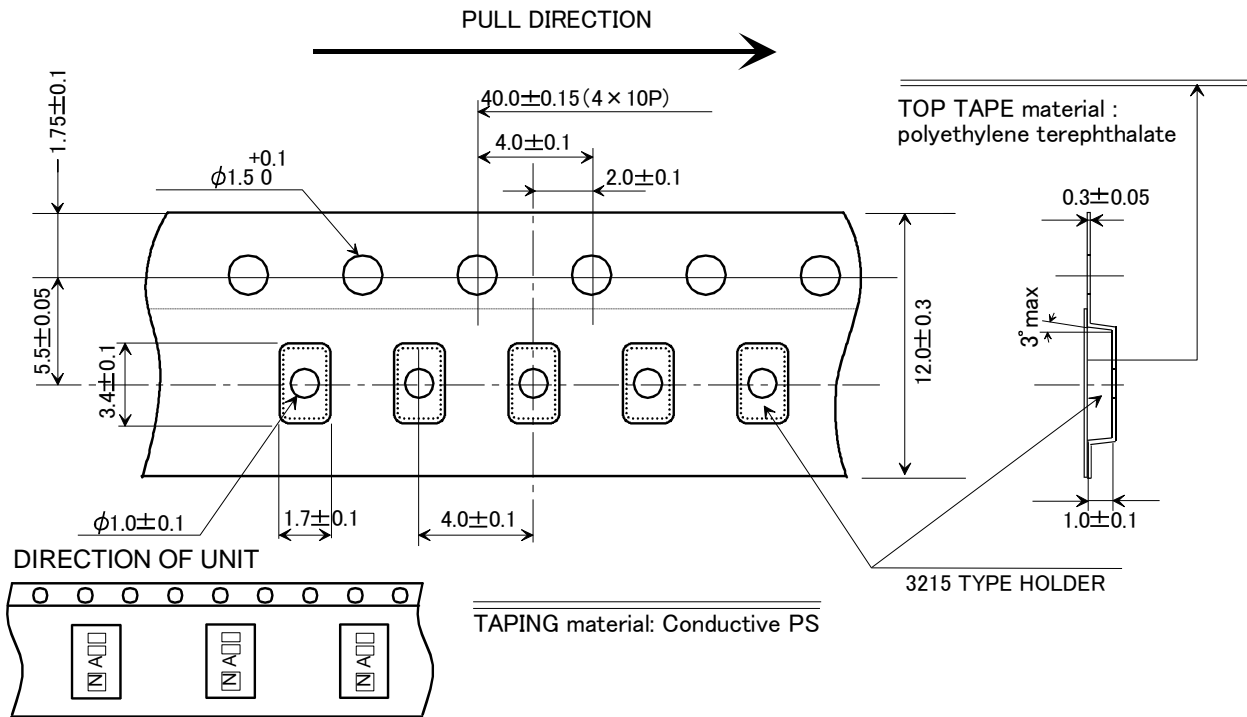


| | | | | |
|----------|----------------|------------|---------------------------------|------------------|
| | Date of Revise | Charge | Approved | Reason |
| B | 24.Apr.2013 | Sato | Matsudo | Added English |
| | Date | Name | Third Angle Projection | Tolerance |
| Drawn | 9.Jul.2009 | N.Yamamoto | mm | Scale |
| Designed | 9.Jul.2009 | N.Yamamoto | Title | Drawing No. |
| Checked | --- | --- | 3215 TYPE Taping and Reel Spec. | EXK17B-00303 1/2 |
| Approved | 9.Jul.2009 | K.Ueki | | |
| | | | | B |

NIHON DEMPA KOGYO CO., LTD.

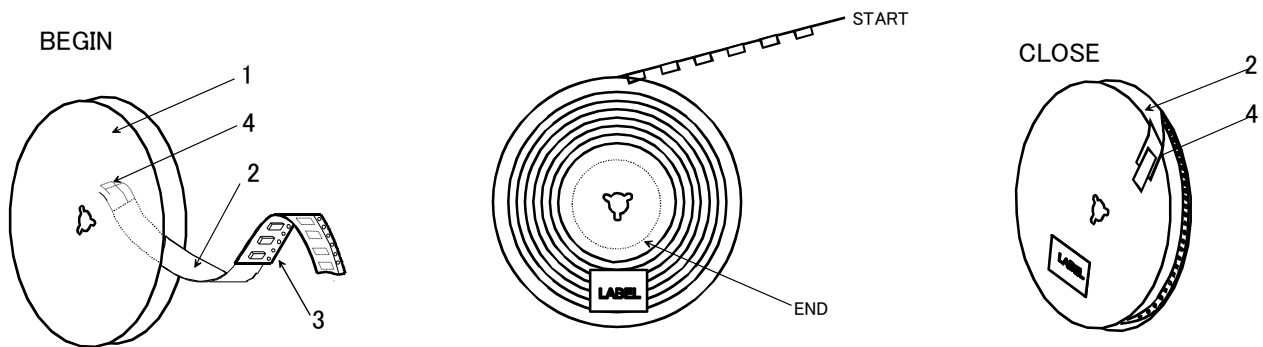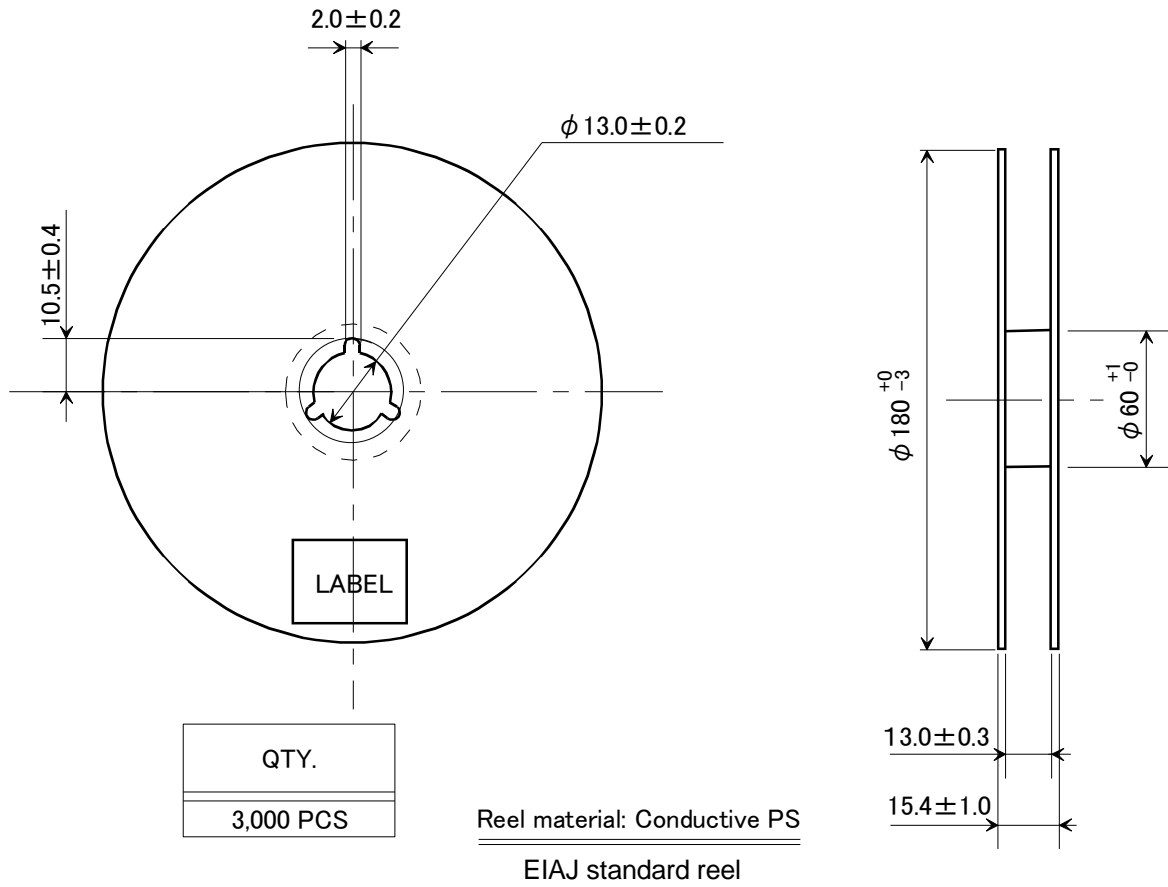

| | | | | | |
|----------|----------------|------------|---------------------------------|------------------|-------|
| | Date of Revise | Charge | Approved | Reason | |
| B | 24.Apr.2013 | Sato | Matsudo | Added English | |
| | Date | Name | Third Angle Projection | Tolerance | Scale |
| Drawn | 9.Jul.2009 | N.Yamamoto | mm | | / |
| Designed | 9.Jul.2009 | N.Yamamoto | Title | Drawing No. | Rev. |
| Checked | --- | --- | 3215 TYPE Taping and Reel Spec. | EXK17B-00303 2/2 | B |
| Approved | 9.Jul.2009 | K.Ueki | | | |

NIHON DEMPA KOGYO CO., LTD.

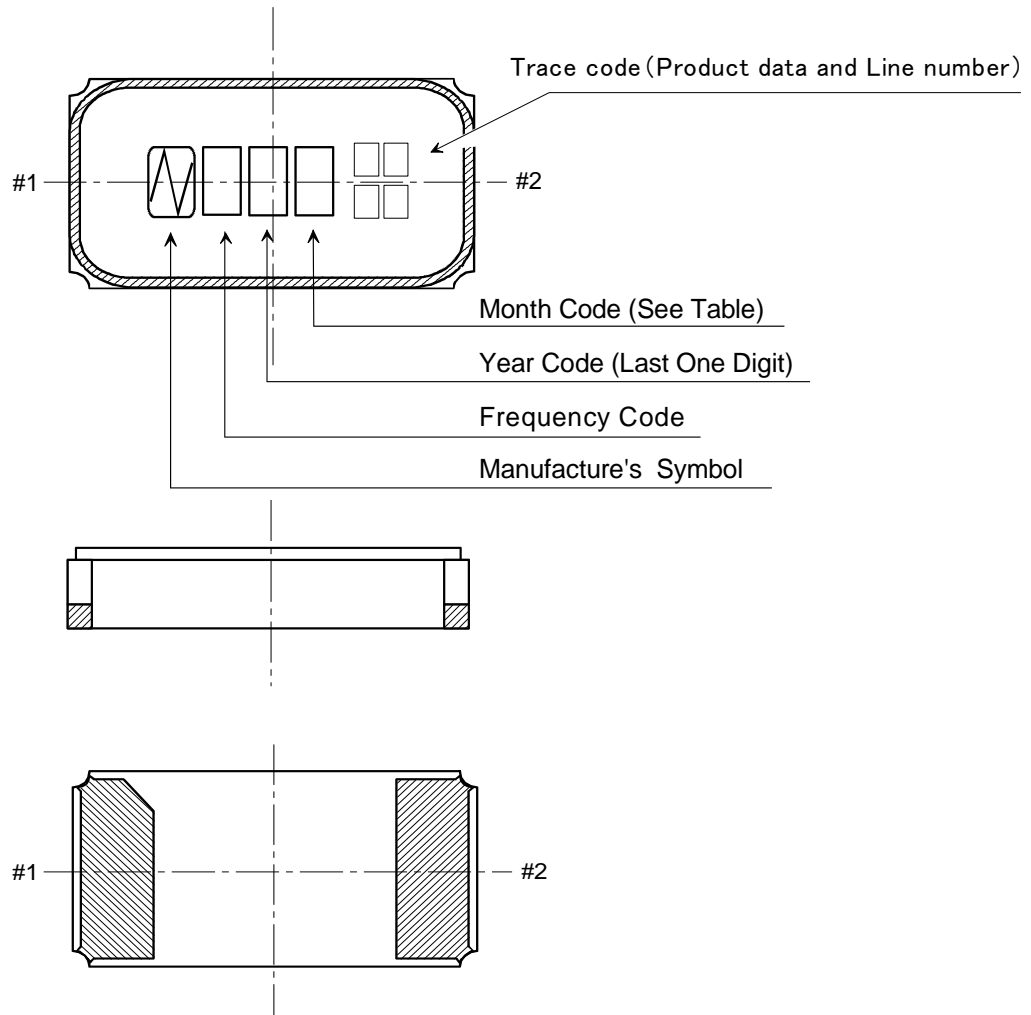

NOTE

1. Month Code

| | | | | | | | | | | | | |
|------------|-----------|-----------|-----------|-----------|----------|-----------|-----------|-----------|-----------|------------|------------|------------|
| Month | 1 Jan. | 2 Feb. | 3 Mar. | 4 Apr. | 5 May | 6 June | 7 July | 8 Aug. | 9 Sep. | 10 Oct. | 11 Nov. | 12 Dec. |
| Month Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | X | Y | Z |

2. Frequency Code









A : 32.768kHz

3. Marking Method

Marking Method is Laser Trimming.

| | | | | | |
|----------------|-------------|----------|--|-----------|------------------------------------|
| Date of Revise | | Charge | Approved | Reason | |
| Date | | Name | Third Angle Projection | Tolerance | Scale |
| Drawn | 28.Oct.2009 | Miyahara | Dimension:mm | | / |
| Designed | 28.Oct.2009 | Miyahara | Title NX3215SA Marking Drawing | | Drawing No. EXH11B-00422 |
| Checked | -- | -- | | | |
| Approved | 28.Oct.2009 | Ueki | | | |

NIHON DEMPA KOGYO CO., LTD.

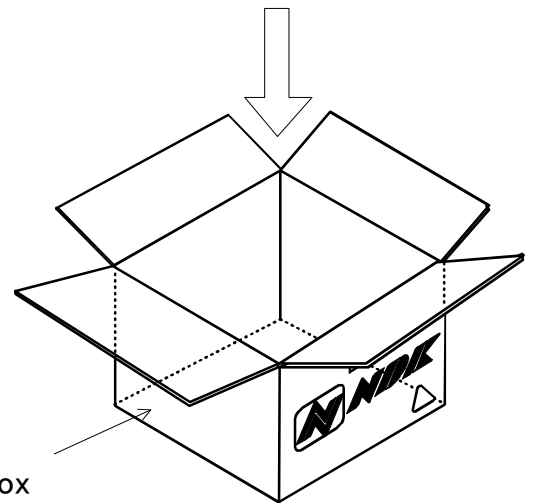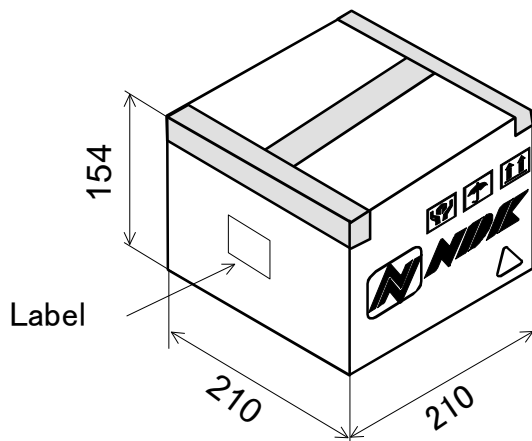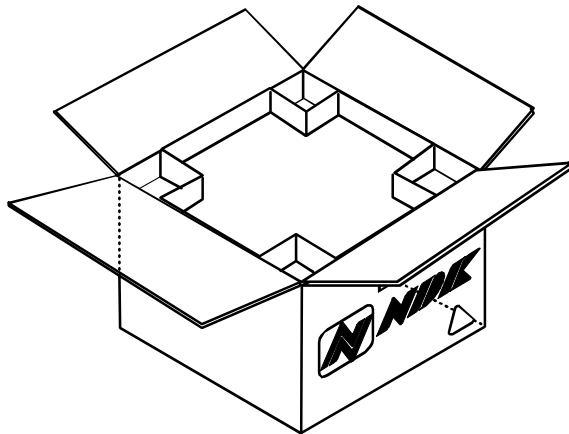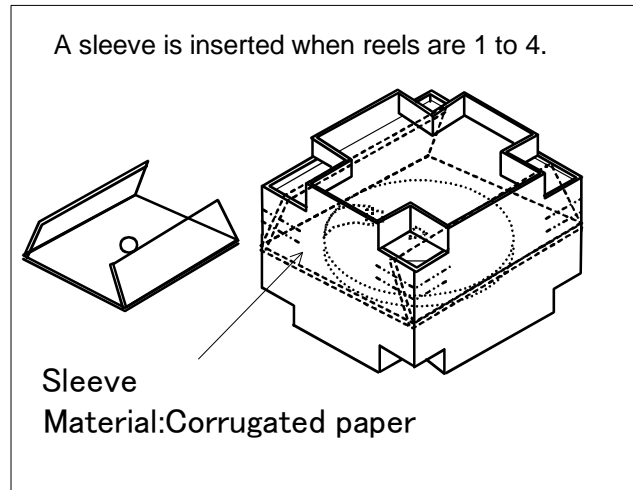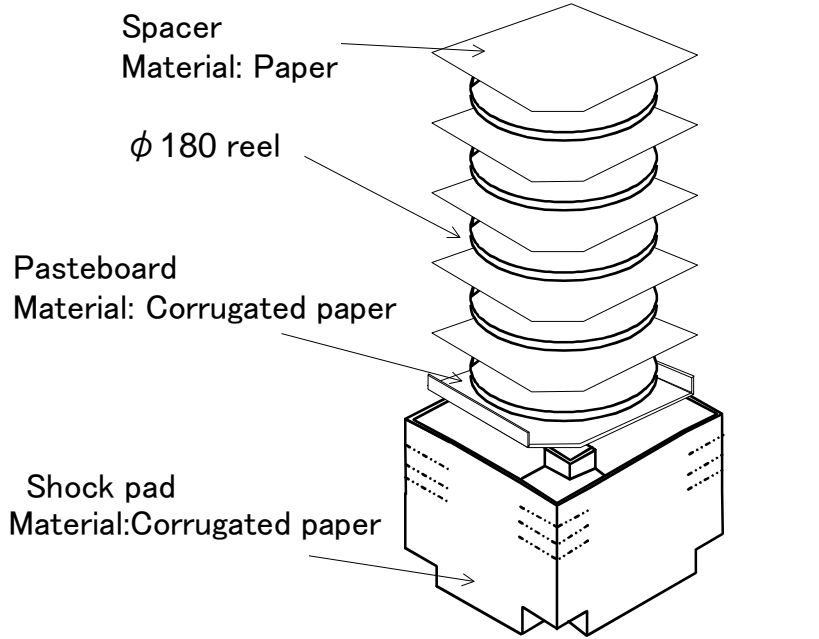


| | | | | |
|----------|----------------|-------------|------------------------|--|
| | Date of Revise | Charge | Approved | Reason |
| C | 4 Jul. 2012 | H. Ohkubo | K. Oguri | Addition of condition when reels are 1 to 4. |
| | Date | Name | Third Angle Projection | Tolerance |
| Drawn | 26 Feb. 2010 | H. Ohkubo | Dimension:mm | ----- |
| Designed | 26 Feb. 2010 | K. Oguri | Title | Drawing No. |
| Checked | 26 Feb. 2010 | K. Oguri | 180 dia. Reel package | EEK17B-00015 |
| Approved | 26 Feb. 2010 | J. Nakamura | | |
| | | | | C |

NIHON DEMPA KOGYO CO., LTD.

Reliability assurance item

(page: 1/1)
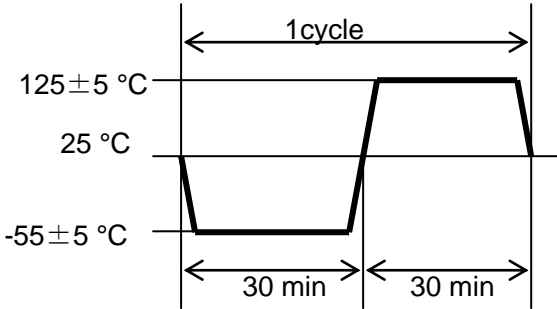
| No. | Test Item | Test Methods | Specification Code |
|-----|------------------------------|--|--------------------|
| 1 | Drop | Devices are dropped from the height 1.2m onto iron plate. Execution 3 times random drops. | A |
| 2 | Shock | Acceleration: 49000 m/s ² Duration: 0.15 ms Half-Sine pulse 1 Shocks in 6 mutually perpendicular planes, Total 6 shocks | A |
| 3 | Vibration | Frequency range: 10 to 2000 Hz Amplitude or Acceleration: 1.52 mm or 196 m/s ² Sweep time: 20 min Test time: 4 h × 3 | A |
| 4 | Resistance to heat | Leave at +125 ± 2 °C for 1000 h | A |
| 5 | Resistance to cold | Leave at -40 ± 2 °C for 1000 h | A |
| 6 | Thermal shock | Device are left into the following temperature cycle as shown in (Figure1) for 1000 consecutive cycle.  (Figure1) | A |
| 7 | Humidity | Device are left in temperature at +85 ± 2 °C with relative humidity of 80~85 % for 1000 h | A |
| 8 | Shear Stress | 10N press the side of product for 10 ± 1s. Ref: 60068-2-21 (Mechanical strength test for SMD) | B |
| 9 | Resistance to soldering heat | Pre-heat temperature : 150 °C Pre-heat time : 60 ~ 120 s Test temperature : 260 ± 5 °C Test time : 10 ± 1 s | A |
| 10 | Solderability | Pre-heat temperature : 150 °C Pre-heat Time : 60 ~ 120 s Peak temperature : 240 ± 5 °C 215 °C Over time : 10 ~ 30 s | C |

| Specification code | Specification |
|--------------------|---|
| A | df/f <= ±20ppm, CI <= 100kΩ |
| B | No peeling-off soldered part. |
| C | The leads shall acquire a new solder coat cover at 95 % of immersed area. |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [NDK](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [MMCC2R32.7680KHZ](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#)