

NX3225GA

For OA / AV

■ Features

A small surface-mount type crystal unit, especially suited for small-sizing requirements.

- •Compact and thin. (3.2 x 2.5 x 0.75 mm typ.)
- •Excellent environmental characteristics, including heat and shock resistance.
- Excellent electrical performance for OA (office automation) and AV (audiovisual) applications.
- •Meets the requirements for re-flow profiling using lead-free solder.






■ Specifications

ltem Model	NX3225GA
Nominal Frequency	9.840 to 50 MHz
Overtone Order	Fundamental
Frequency Tolerance (25 ±3 °C)	±20 × 10 ⁻⁶
Frequency versus Temperature Characteristics (with reference to +25 °C)	±30 × 10 ⁻⁶
Operating Temperature Range	−40 to +85 °C
Storage Temperature Range	−40 to +85 °C
Equivalent Series Resistance	Refer to *1
Level of Drive	10 μW (Max. 200 μW)
Load Capacitance	8pF
Specifications Number	STD-CRG-2

■ Dimensions

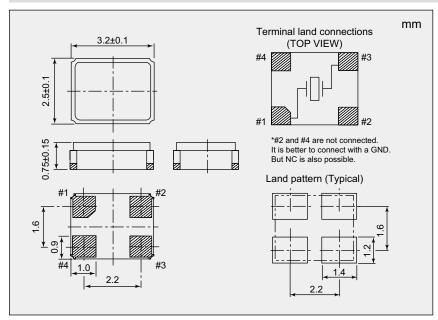

*1 Equivalent Series Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. $[\Omega]$
9.840 to 12	200
12 to 13	100
13 to 20	80
20 to 50	50

Please specify the model name, frequency, and specification number when you order products. For further questions regarding specifications, please feel free to contact us.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by NDK manufacturer:

Other Similar products are found below:

MC405 32.0000K-R3:PURE SN 7A-40.000MAAE-T MP1-8.0 99-BU 9B-15.360MBBK-B PTX-A2JM-10.000M 9C-7.680MBBK-T H10S-12.000-18-EXT-TR R38-32.768-12.5-5PPM-NPB BTD1062E05A-513 21U15A-21.4MHZ RTX-781DF1-S-20.950 LFXTAL066198Cutt 9C-14.31818MBBK-T A-11.000MHZ-27 SPT2A-.032768B SPT2A.032768G SSPT7F-9PF20-R FX325BS-38.88EEM1201 MP-1-25.000MHZ-3L MP-1-6.000MHZ LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7A-24.576MBBK-T 7B-30.000MBBK-T 7A-14.31818MBBK-T 6526-202-1501 BTJ120E02C SG636PCE-20.000MC 3404 CM315D32768EZFT C1E-24.000-7-2020-R C1E-19.200-12-1530-X-R C1E-16.000-12-1530-X-R ABM11-16.000MHZ-9-B1U-T FL5000014 EUCA18-3.1872M 425F35E027M0000 17196 MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au VXM7-1C1-16M000 MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au ECS-80-18-30-JGN-TR 17000 17301 16875