


NX8045GB

For OA / AV

Features

- A small surface-mount type crystal unit.
- Compact and thin. (8.0×4.5×1.8mm)
- Supports low frequencies(from 4MHz).
- Ideal for OA/AV applications and Accessories for a car.
- Excellent environmental performance, including heat and shock resistance.
- Meets the requirements for re-flow profiling using lead-free solder.

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

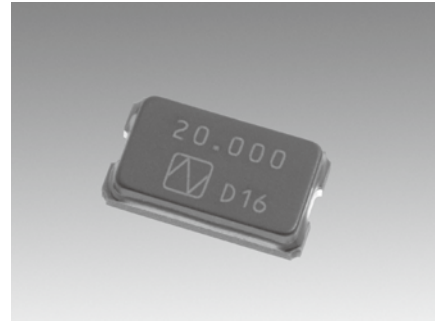

Specifications

Item	Model	NX8045GB						
		Standard						Optional
Nominal Frequency (MHz)		4 ≤ F ≤ 4.9	5 ≤ F ≤ 7.499	7.5 ≤ F ≤ 40	4 ≤ F ≤ 4.9	5 ≤ F ≤ 7.499	7.5 ≤ F ≤ 48	4 ≤ F ≤ 48
Overtone Order		Fundamental						Fundamental
Frequency Tolerance (25 ±3 °C)		±30 × 10 ⁻⁶			±20 × 10 ⁻⁶			±20 × 10 ⁻⁶
Frequency versus Temperature Characteristics (with reference to +25 °C)		±50 × 10 ⁻⁶			±30 × 10 ⁻⁶			±30 × 10 ⁻⁶
Operating Temperature Range (°C)		-40 to +85			-10 to +70			-40 to +85 *2
Storage Temperature Range (°C)		-40 to +125			-40 to +85			-40 to +125 *2
Equivalent Series Resistance		Refer to *1						Refer to *1
Level of Drive (µW)		50 (Max. 500)						50 (Max. 500)
Load Capacitance (pF)		8						6 to 32
Frequency Aging (+25 °C)		---						Max. ±10 × 10 ⁻⁶ / year *2
Specifications Number		STD-CJL-5	STD-CSF-5	STD-CSF-6	STD-CJL-2	STD-CSF-3	STD-CSF-4	Refer to *3

Please specify the model name, frequency, and specification number when you order products.

For further questions regarding specifications, please feel free to contact us.

*2 If you have any other requests, NDK will study it.

*3 Ordering information: Overtone Order Fundamental / 3rd Overtone, the Operating Temperature Range, Frequency versus Temperature Characteristics, Frequency Tolerance, and Load Capacitance.

Ex. Model, Frequency (24.000000MHz 6digits), S1: Fundamental or S3 : 3rd overtone

- Operating Temperature Range (-40 to +85°C) - Frequency versus Temperature Characteristics (±30 × 10⁻⁶)


- Frequency Tolerance (±20 × 10⁻⁶) - Load Capacitance (10pF)

NX8045GB

24.000000MHz

S1-4085-30-20-10

Dimensions

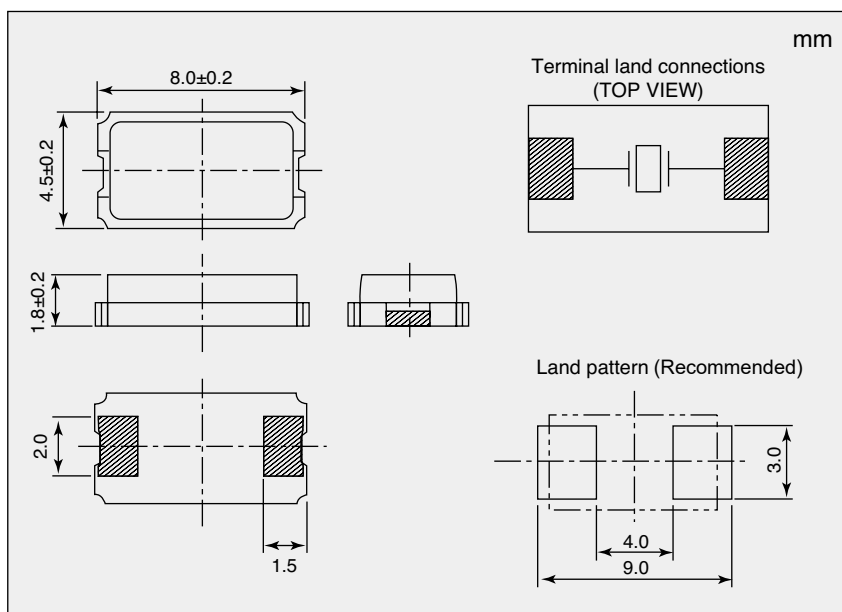

*1 Equivalent Series Resistance

Nominal Frequency (MHz)	Equivalent Series Resistance Max. (Ω)
4 ≤ F < 5	300
5 ≤ F < 8	250
8 ≤ F < 9.5	200
9.5 ≤ F < 10	120
10 ≤ F < 12	100
12 ≤ F < 13	80
13 ≤ F ≤ 40	50

If you have any other requests, NDK will study it.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [NDK](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [MMCC2R32.7680KHZ](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#)