

NA1394-6-W-B

Firewire 6 with IEEE 1394 6 pole receptacles on both ends, black D-housing

Due to the rising digitisation the interface problems between audio/video networks, IT equipment (e.g. Mac) and mLAN connections increase.


Neutrik's Firewire feedthrough type 1394a, mounted in the standardized D-shape housing, solves this problem.



Downloads

Features & Benefits

- Ideal for audio networking and integration of digital equipment into audio systems
- Firewire feedthrough with 6 pole IEEE 1394 receptacle at both ends
- Universally accepted standard D-shape housing
- Removable screen to chassis grounding:

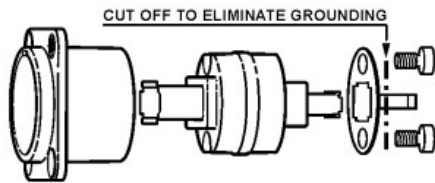

Technical Information [▼ hide](#)

Product	
Title	NA1394-6-W-B
Connection Type	Firewire
Gender	female
Mechanical	
Mounting direction	Front mounting
Chassis shape	D
Material	
Contact plating	Au
Contacts	Brass (CuZn39Pb3)
Insert	PBTP 15 % GR
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Black chromium
Environmental	
Flammability	UL 94 V-0
Standard compliance	IEEE 1394
Temperature range	-25 °C to +85 °C

Accessories

DSS-*

MFD

SCDP-*

SCDX



SCCD-W



SCD-W



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IEEE 1394 Connectors](#) category:

Click to view products by [Neutrik](#) manufacturer:

Other Similar products are found below :

[EHFF2](#) [PX0485/BK](#) [EHFWX2BX](#) [3E106-2230KV](#) [53460-0619](#) [3E106-0220KV](#) [1734290-2](#) [53462-0629](#) [NA1394-6-W](#) [5788516-1](#) [3E106-1230 KV](#) [3E306-3200-008](#) [FWF21NSCC](#) [FWFODE](#) [FWFTV22G](#) [FWFTVC2G](#) [FWFTVC2N](#) [JE14](#) [JE18](#) [PX0480/BK](#) [928](#) [929](#) [930](#)
[NA1394-6-W-B](#) [EHFW800X2](#) [5787956-1](#) [PX0419](#) [PX0847](#) [693-006-699-003](#) [45740-0001](#) [53460-0639](#) [53462-0001](#) [53984-0681](#)
[EHFW800X2B](#) [EHFW800X2PKG](#) [1734290-1](#)