




NBNC75BTUP11X

The rearTWIST UHD BNC connectors are specifically designed for high resolution video signal transmissions. Due to the unique insulator and contact pin design, the connectors feature low return loss values for 4K and 8K signals.

The NBNC75BTUP11X is designed to be used with the common Paladin crimp tool.

Features & Benefits


- Optimized contact pin and insulator design for UHD-data transmissions
- Swiss antraloy plating
- Improved return loss values at high frequencies
- Proven rearTWIST technology
- Fully compatible with conventional BNC chassis connectors

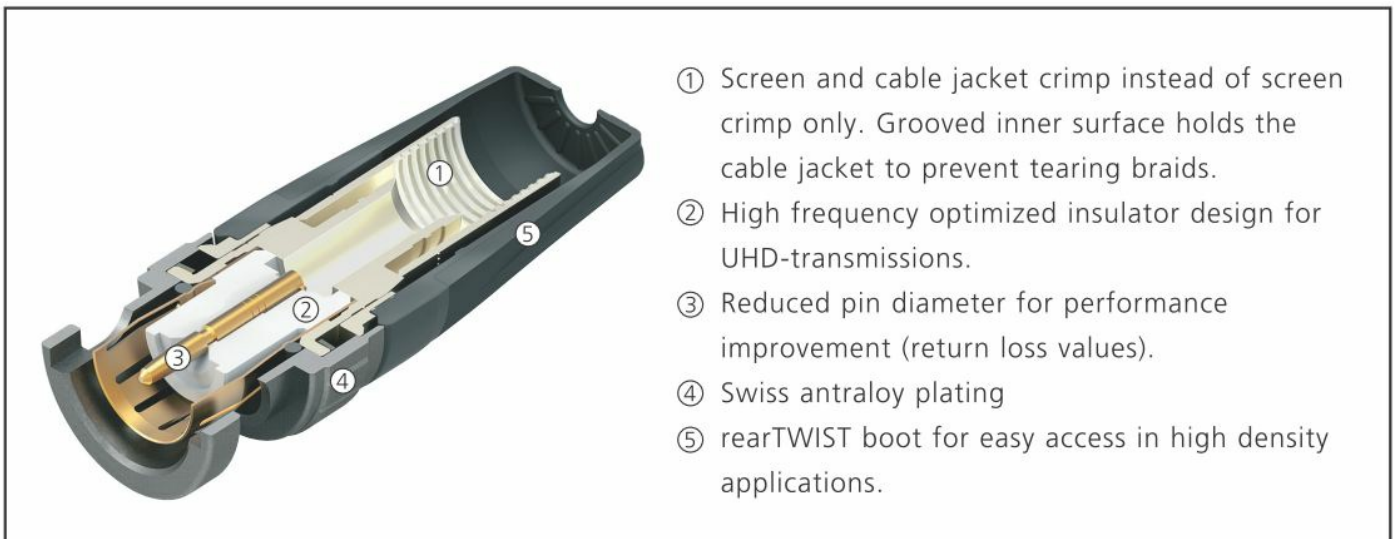

Optimized Return Loss

Due to optimized insulator design and reduced crimp diameter from center pin the Neutrik rearTWIST UHD BNC connector achieves increased headroom compared to conventional BNC connectors and offers additional return loss reserve for potential impedance deviations resulting from cable bending, incorrect connector assembly or faulty connection interfaces without signal interruption.

For more details see Neutrik UHD BNC White Paper.

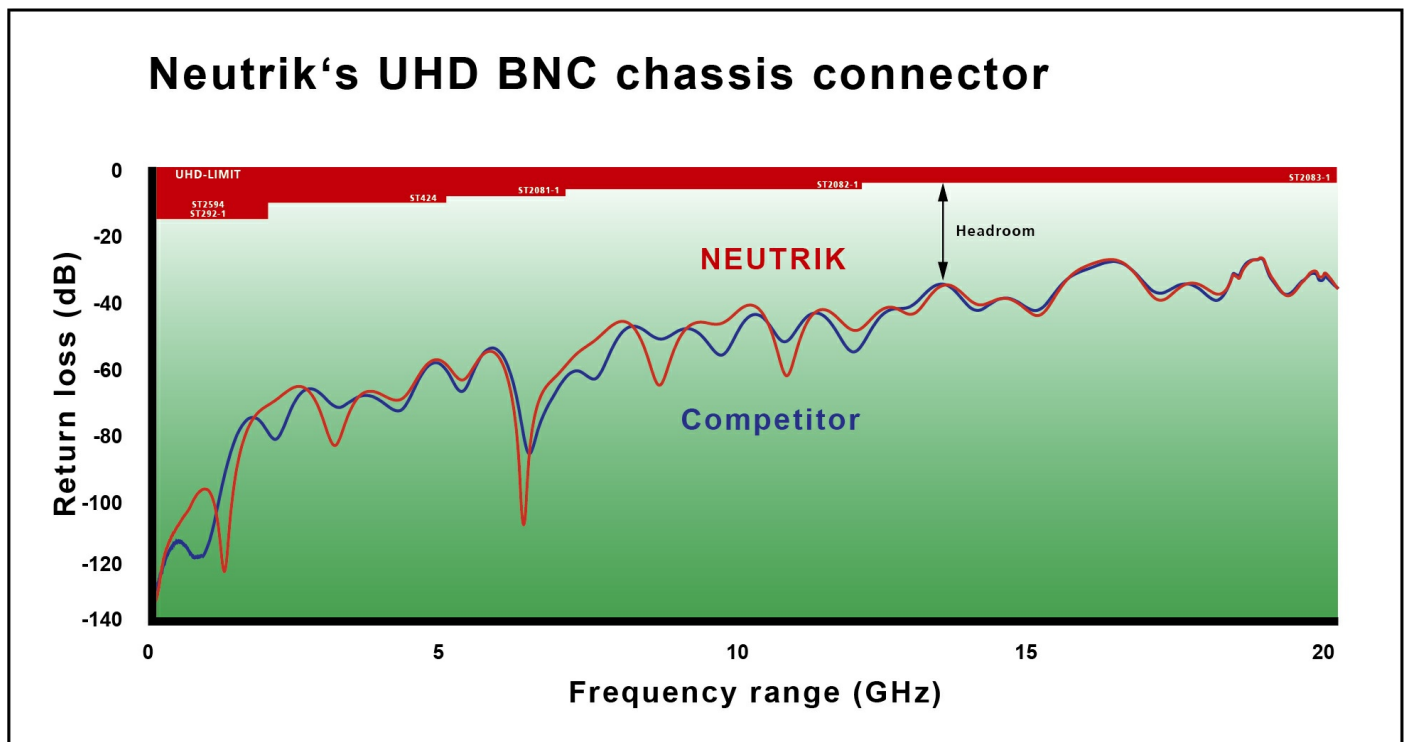

Crimp Dimensions

In order to achieve optimum return loss values at high frequencies the crimp dimension of the contact pin has been reduced.

Pin:	0.041 in square
Shield:	0.278 in hex
Crimp die:	Paladin crimp die HDTV

Approved Cables

To guarantee high performance for each cable-connector combination at high frequencies Neutrik measured common COAX cables which are specifically designed for ultra high definition transmission (UHD). Find all approved cables listed below.

Suitable cables:

CommScope 5765, Gepco VSD2001, Suhner S05163-02, Suhner S05133-07, Percon VK77

UHD optimized cables:

Argosy Image 1000, Belden 1694A, Belden 1694ANH, Belden 1694DNH, Belden 4694R, Belden 70082, Belden 70082NH, Belden 70082CH, Bryant SD11, Bryant SD10F, Canare L-4.5CHWS, Canare L-4.5CHD, Clark Wire CD7506, DirectCable 301-330 Evolution XPC, DirectCable 301-361 6 Channel Evolution XPC, Klotz V10/48, Klotz V10/48H

Technical Information

Product	
Title	NBNC75BTUP11X
Connection Type	BNC 75 Ω
Gender	male

Electrical	
Contact resistance	≤ 3 mΩ
Contact resistance	≤ 2 mΩ
Dielectric strength	1.5 kVdc
Impedance	75 Ω
Insulation resistance	> 5 GΩ
Rated voltage	< 50 V
VSWR	≤1.06 / >30 dB up to 6 GHz ≤1.13 / >24 dB up to 12 GHz ≤1.22 / >20 dB up to 18 GHz

Mechanical	
Cable O.D.	7.3 mm
Cable retention	> 30 N (center)
Crimp size	0.278 in hex
Crimp size (pin)	0.041 in hex
Insertion force	< 25 N
Lifetime	> 1000 mating cycles
Locking device	Bayonett
Cable anchoring	Jacket crimping

Material	
Contacts	Brass (CuZn35Pb2), 0.2 µm AuCo (center contact)
Shell	Brass (CuZn39Pb3)
Shell plating	Antraloy
Insert	PP

Environmental	
Temperature range	-30 °C to +85 °C
Contact crimpability	Complies with IEC 60803 and IEC 60352-2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:

Click to view products by [Neutrik](#) manufacturer:

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#) [R112186000](#)