


XLR Receptacles



Smallest available flange mounted XLR receptacle.



Available in 3-6 pin contact arrangements.



Female connector available exclusively without latch.



All plastic one piece shell male and female use same cutout.

P Series



NC4FP-1



NC6MP-B

PP Series





NC3FPP



NC3MPP

- Male and female available in 3-6 pin configurations; 7 pin versions available in female only.
- Smallest available hard wiring receptacles with large solder cups.
- Male and female use different mounting hole dimensions and do not fit in same mounting hole.
- Front mountable only.
- One piece version – insert is NOT removable from shell.
- Short female receptacle.
- Compatible with Switchcraft DxM, DxP; Cannon XLRx31, XLRx32.
- 6 pole version available with Switchcraft contact arrangement.

- Male and female available in 3 pin solder cup configurations.
- Female receptacle is latchless.
- Shell is all plastic.
- Male and female mount in same hole cutout.
- Cost effective.
- Accessories include dust covers (SCDF/M) and color coding (DSS-color).
- Can be converted from solder to PCB mount using optional PPCB-H or PPCB-V adapters.

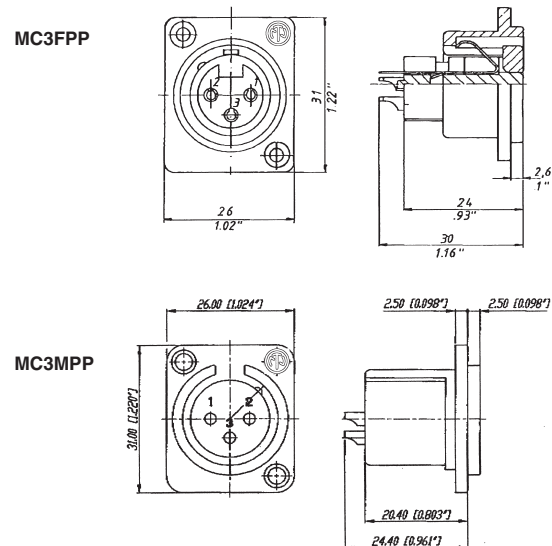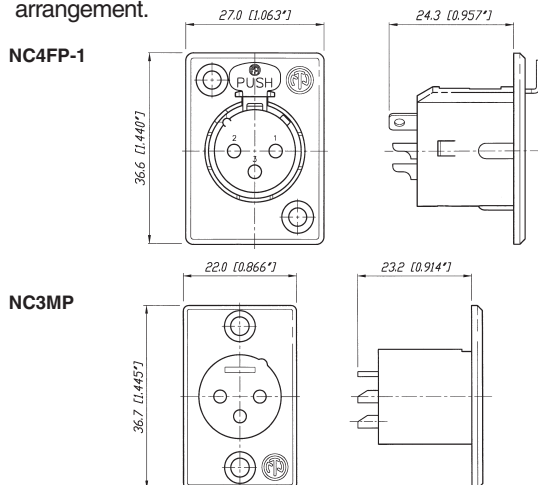

XLR Receptacles — Technical Data

Specifications			A Series	AA Series	B Series	BA Series	D Series	DL1 Series	DS Series	DLX Series	DLX Crimp
Electrical											
Number of contacts:			3-5	3	3-5	3	3	3-7	3	3-7	3
Contact Resistance: male/female: $\leq 3\text{ m}\Omega/\leq 5\text{ m}\Omega$			●	$\leq 8\text{ m}\Omega$	●	●	●	●	●	●	●
Insulation Resistance: Initial: $> 2\text{ G}\Omega$			●	●	●	●	●	●	●	●	●
After damp heat test: $> 1\text{ G}\Omega$			●	●	●	●	●	●	●	●	●
Dielectric Strength: 1500 V dc			●	●	●	●	●	●	●	●	●
Rated voltage: 50 V ac			●	●	●	●	●	●	●	●	●
Rated current per contact											
3 pole: 16 A			6 A	6 A	6 A	6 A	6 A	●	10 A	●	1 A
4 pole: 10 A			4 A	—	4 A	—	—	●	—	●	—
5, 6 pole: 7.5A			3 A	—	3 A	—	—	●	—	●	—
7 pole: 5 A			—	—	—	—	—	●	—	●	—
Capacitance between contacts											
3 pole: $\leq 7\text{ pF}$			●	●	●	●	$\leq 4\text{ pF}$	$\leq 4\text{ pF}$	$\leq 4\text{ pF}$	$\leq 4\text{ pF}$	$\leq 4\text{ pF}$
4, 5, 6 pole: $\leq 7\text{ pF}$			●	—	●	—	—	●	—	●	—
7 pole: $\leq 9\text{ pF}$			—	—	—	—	—	●	—	●	—
Mechanical											
Lifetime $> 1'000$ insertion / withdrawal cycles			●	●	●	●	●	●	●	●	●
Insertion/withdrawal force ≤ 20 Newtons (N)			●	●	●	●	●	●	$\leq 30/\geq 10$	●	●
Retention method: standard: latch lock			●	●	●	●	●	●	●	●	●
latchless "O" Version: $\geq 20\text{ N}$ separating force			●	●	●	●	●	●	—	●	●
Termination Type: Solder Terminals			—	—	—	—	—	●	—	●	●
PC Board Mount			●	●	●	●	●	—	—	—	●
IDC			●	—	●	—	—	—	—	—	●
Screw Terminals			—	—	—	—	—	—	●	—	●
Materials											
Shell: Zinc diecast (ZnAl4Cu1)			—	—	—	—	●	●	—	●	●
(gal Ni or black Cr)			—	—	—	—	●	●	●	●	●
Insert: Polyamide PA 6.6 30% GR			●	●	●	●	●	●	●	●	●
Ring: Zinc diecast (ZnAl4Cu1)			—	—	●	●	—	—	—	—	—
Contacts female 3 pole: Bronze (CuSn6)			●	●	●	●	●	●	●	●	●
female 4 - 7 pole: Brass (CuZn39Pb3)			●	●	●	●	●	●	—	●	—
all male: Brass (CuZn39Pb3)			●	●	●	●	●	●	—	●	●
Contact surface:											
Gold: gal 0.2 μm AuCo over 2 μm NiP15 (Tribor®)			●	●	●	●	—	—	—	—	—
Gold: gal 0.2 μm Au hard alloy over 2 μm Ni			—	—	—	—	●	●	●	●	●
Silver: gal 2 μm Ag			—	—	—	—	●	●	—	●	●
Latch lock & spring: Ck 67 steel, treated			●	●	●	●	●	●	●	●	●
Environmental											
Operating temperature: -30°C to $+80^\circ\text{C}$			●	●	●	●	●	●	●	●	●
Flammability: UL 94 HB			●	●	●	●	●	●	●	●	●
UL 94 V-0			3 pole	—	3 pole	—	—	—	—	—	—
Protection class: IP 40			●	●	●	●	●	●	●	●	●
Solderability complies with IEC 68-2-20			●	●	●	●	●	●	—	●	●
Mounting screw:			A-Screw	A-Screw	1	A-Screw	—	—	—	—	—
Color coding:			ACR -*	—	—	ACR -*	DSS	DSS	DSS	DSS	DSS

1 B Series 3 pole connectors: B-Screw-1-8; 4 & 5 pole versions: A-Screw-1-8





XLR Receptacles — Technical Data

Specifications			DM3 Series	MPR-HD Series	NC3FIP (not pictured)	P Series	PP Series	Combo Series	Combo A Series
Electrical									
Number of contacts:			4 – 5	3 – 5	3	3 – 7 (6**)	3	5 – 10	3/3
Contact Resistance: $\leq 5 \text{ G}\Omega$			●	●	$\leq 6 \text{ m}\Omega$	●	●	$\leq 10 \text{ m}\Omega$	$\leq 10 \text{ m}\Omega$
Insulation Resistance: Initial: $> 2 \text{ G}\Omega$			●	●	●	●	●	●	●
After damp heat test: $> 1 \text{ G}\Omega$			●	●	●	●	●	$> 0.5 \text{ G}\Omega$	●
Dielectric Strength: 1500 V dc			●	●	●	●	●	●	●
Rated voltage: 50 V ac			●	●	●	●	●	●	●
Rated current per contact									
3 pole: 16 A			—	●	●	●	●	—	3 A
4 pole: 6 A			10 A	10 A	—	10 A	—	—	—
5, 6 pole: 3 A			7.5 A	7.5 A	—	7.5 A	—	—	—
7 pole: 5 A			—	—	—	●	—	—	—
Combo XLR + Jack contacts 7.5 A			—	—	—	—	—	●	●
Capacitance between contacts									
3 pole: $\leq 7 \text{ pF}$			—	$\leq 4 \text{ pF}$	●	$\leq 4 \text{ pF}$	●	$> 2 \text{ pF}$	$> 2 \text{ pF}$
4, 5, 6 pole: $\leq 7 \text{ pF}$			●	●	—	●	—	—	—
7 pole: $\leq 9 \text{ pF}$			—	—	—	●	—	—	—
Mechanical									
Lifetime $> 1,000$ insertion / withdrawal cycles			●	●	●	●	●	●	●
Insertion/withdrawal force ≤ 20 Newtons (N)			●	●	●	●	●	● 25 N	●
Retention method: standard: latch lock			●	●	—	●	—	● (XLR)	● (XLR)
Latchless "O" Version: ≥ 20 N separating force			—	●	● $> 10 \text{ N}$	●	●	● 25 N	● 25 N
Termination Type: Solder Terminals			—	●	—	●	●	●	●
PC Board Mount			●	—	●	—	—	●	●
Materials									
Shell: Zinc diecast (ZnAl4Cu1)			●	●	—	●	—	—	—
(gal Ni or black Cr)			●	Ni plated	—	●	—	—	—
Insert: Polyamide PA 6.6 30% GR			●	●	●	●	●	●	●
Ring: Zinc diecast (ZnAl4Cu1)			—	—	—	—	—	—	—
Contacts female 3 pole: Bronze (CuSn6)			—	—	●	●	●	●	●
female 4 - 7 pole: Brass (CuZn39Pb3)			●	—	—	—	—	—	—
all male: Brass (CuZn39Pb3)			●	●	—	●	●	—	—
Contact surface:									
Gold: gal 0.2 μm AuCo over 2 μm NiP15 (Tribor [®])			—	—	—	—	—	●	●
Gold: gal 0.2 μm Au hard alloy over 2 μm Ni			●	●	●	●	●	—	—
Silver: gal 2 μm Ag			●	—	—	●	—	—	—
Latch lock & spring: Ck 67 steel, treated			●	—	●	●	●	●	●
Environmental									
Operating temperature: -30°C to $+80^\circ \text{C}$			●	●	●	●	●	●	●
Flammability: UL 94 HB			●	●	●	●	●	●	●
UL 94 V-0			—	—	—	—	—	—	—
Protection class: IP 40			●	IP 65	—	●	●	●	●
Solderability complies with IEC 68-2-20			●	●	●	●	●	●	●
Mounting screw:			M3	—	—	—	—	A-Screw	A-Screw
Color coding:			●	—	—	—	●	—	—


**..... P Series male 3 – 6 pole



Frontplattenausschnitt (Montage von hinten)
Panel cut out (Panel-mounting otion rear side)

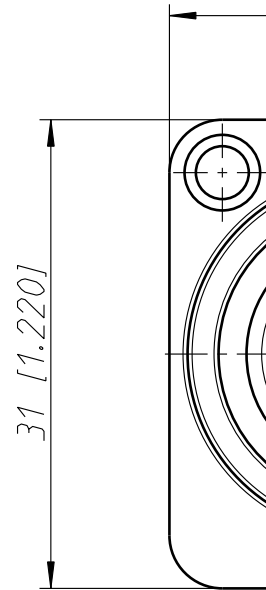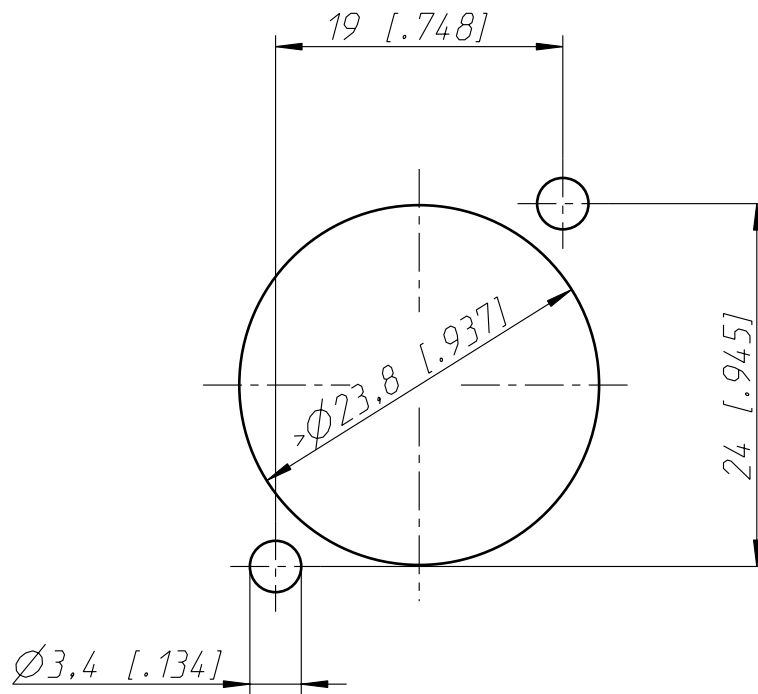

Frontplattenausschnitt (Montage von vorne)
Panel cut out (Panel-mounting otion front side)

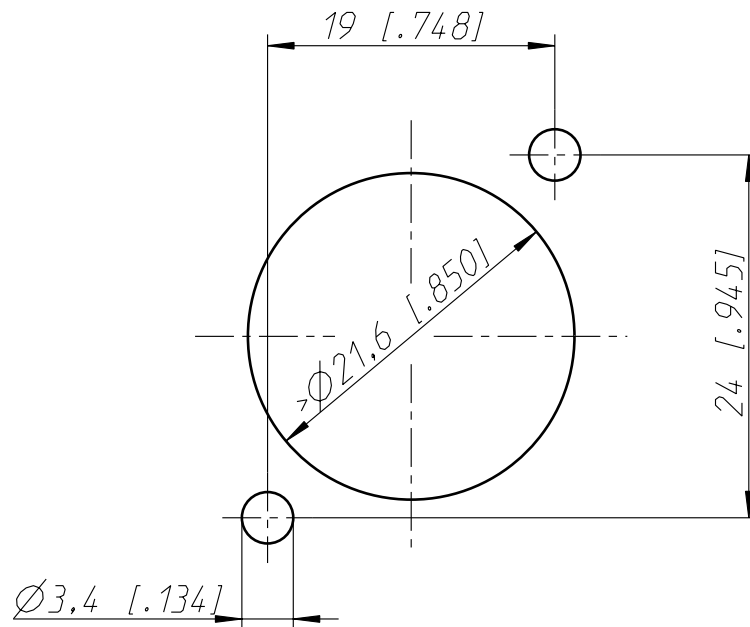

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [XLR Connectors](#) category:

Click to view products by [Neutrik](#) manufacturer:

Other Similar products are found below :

[707-0300](#) [PPCB-H](#) [A3F01](#) [A3M01](#) [QGP3F](#) [AA3FL](#) [AAA4FWZ](#) [AAA4MWZ](#) [AC3-MIC](#) [AC4-MIC](#) [AC5FPZB](#) [AC6AFDZV](#) [D4FB](#)
[DE4MW](#) [DHNF-BAG](#) [E3MBAUSW](#) [NA3MP-UW](#) [NC3FBHR1-0](#) [NC3FD-H-0](#) [NC3FK-V](#) [NC3FXY-B](#) [NC3MK-V](#) [NC3MXY](#) [NC5FX-](#)
[HD-B](#) [NC6MSX-BAG](#) [SL05](#) [99.265.0400.0](#) [A3F04](#) [AC3FG](#) [AC4-FCP](#) [AC4FPZ](#) [AQG4F](#) [2504FP](#) [30-498-2](#) [R6MZ](#) [3FD-H-I](#) [3FD-H-I-\(0\)](#)
[3FD-H-I-B](#) [3FD-V-I](#) [3FD-V-I-\(0\)](#) [3FD-V-I-B](#) [3MD-H-I-B](#) [3MD-V-I](#) [3MD-V-I-B](#) [TA01](#) [TA3MWX](#) [TA5MLWX](#) [MINICCF8](#)
[TRASM4M1X](#) [TRASM7M1X](#)