



### **LUMILEDS LUXEON CZ Starboards**

# **Data Sheet**

Industry Leading High Powered LED Starboards

Version 1.0

#### Lean & Fast, Made Smarter.

Superior Performance - Stay current with the highest intensity LEDs

**Design Faster** - Use industry standard starboards to shorten development time

Maximum Flexibility - Design to your exact specifications using the full spectrum of NewEnergy starboards

Rapid Innovation - Work with NewEnergy on your custom solution

#### **Primary Applications**










Architectural **Emergency Vehicle** Downlight Stage/concert Spot lighting Floodlight

#### **Superior Performance with Flexible Options**

- · Multiple color options for your application
- · Single focal length for all colors to ensure superior mixing
- · Small source size reduces the size of secondary optics
- · Prototype faster, test multiple options

#### **Custom Solutions**

NewEnergy operates facilities globally with ISO certifications for the LED lighting, automotive and medical industries. Our North Carolina based office provides quick engineering & sales support with an R&D lab for prototype development and custom solutions. Our in-house global manufacturing capabilities allow for both building in the United States as well as overseas at scale.

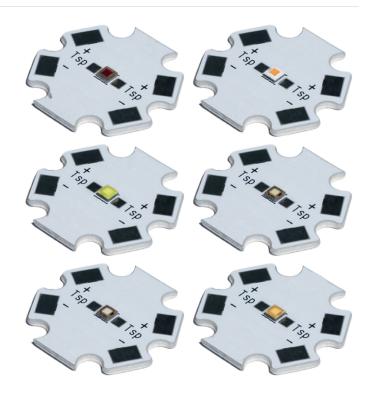

#### About NewEnergy

NewEnergy accelerates the adoption of LED technology through simple, modular products and custom designs. Through 30 years of experience, state of the art manufacturing, full traceability and advanced quality controls, NewEnergy offers leading solid state lighting components, modules and custom solutions. NewEnergy customers get to market faster, with less resources, at lower costs. Visit new-energyllc.com for more information.



RoHS

# **LUMILEDS LUXEON CZ Starboards**

## Product Selection Guide


Part Number	CRI/Color	CCT/ Typical Peak Wavelength Range	Typical Viewing Angle	Typical Luminous Flux (mW)	Typical Forward Voltage (Vf)	Typical Wattage (W)
LST1-01H07-RED1-01	Red	624-634	120°	31	2.00	0.70
LST1-01H07-PCA1-01	Amber	n/a <sup>(2)</sup>	120°	78	2.75	0.96
LST1-01H07-LME1-01	Lime	n/a <sup>(2)</sup>	120°	122	2.75	0.96
LST1-01H07-GRN1-01	Green	520-540	120°	117	3.05	1.07
LST1-01H07-BLU1-01	Blue	465-485	120°	34	2.83	0.99
LST1-01H07-VLT1-01	Violet	420-430	120°	458	2.83	0.99
LST1-01H07-3080-01	80	3000K	120°	95	2.75	0.96
LST1-01H07-4080-01	80	4000K	120°	99	2.75	0.96

 $<sup>^{(</sup>i)}$ Flux, wavelength, and wattage values specified at 350mA,  $T_{_{i}}$  85 $^{\circ}$ C

## Maximum Ratings

Part Number	DC Current (A)	Tsp Temp (°C)	Power (W)
LST1-01H07-RED1-01	1.05	105	2.6
LST1-01H07-PCA1-01	1.05	105	3.7
LST1-01H07-LME1-01	1.23	105	4.3
LST1-01H07-GRN1-01	1.05	105	3.7
LST1-01H07-BLU1-01	1.05	105	3.7
LST1-01H07-VLT1-01	1.23	105	4.3
LST1-01H07-x080-01	1.23	105	4.3

## Mechanical Dimensions (Units: Inches)

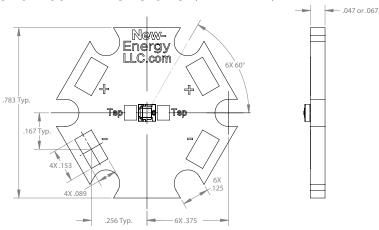



<sup>&</sup>lt;sup>(2)</sup>Amber and Lime starboards are binned by chromaticity coordinates, see LUMILEDS LED datasheet for values.

All values shown above are typical.

Additional colors available upon request.

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for High Power LEDs - White category:

Click to view products by New Energy manufacturer:

Other Similar products are found below:

LTW-K140SZR40 B42180-08 STW8Q2PA-R5-HA LTPL-P00DWS57 LTW-K140SZR30 LZP-D0WW00-0000 SZ5-M1-WW-C8-V1/V3-FA LTW-K140SZR57 LTW-K140SZR27 BXRE-50C2001-C-74 MP-5050-8100-27-80 MP-5050-6100-65-80 MP-5050-6100-40-80 MP-5050-6100-30-80 KW DPLS32.SB-6H6J-E5P7-EG-Z264 L1V1-507003V500000 KW DMLS33.SG-Z6M7-EBVFFCBB46-8E8G-700-S ASMT-MW05-NMNS1 KW DPLS33.KD-HIJG-D30D144-HN-22C2-120-S KW DDLM31.EH-5J6K-A737-W4A4-140-R18 GW JTLRS1.CM-K1LW-XX57-1-100-Q-R33 KW DDLM31.EH-5J6K-A636-W4A4-140-R18 KW DDLM31.EH-5J6K-A131-W4A4-140-R18 SML-LXL8047MWCTR/3 L2C5-40HG1203E0900 JB3030AWT-P-U27EA0000-N0000001 JK3030AWT-P-U30EA0000-N0000001 JK3030AWT-P-H30EB0000-N0000001 JK3030AWT-P-H40EB0000-N0000001 JK3030AWT-P-U27EB0000-N0000001 JK3030AWT-P-U30EB0000-N0000001 XPGBWT-HE-0000-00JE5 GW PUSTA1.PM-PAPC-XX53-1-1050-R18 BXRE-30E4000-C-83 BXRE-50C6501-D-84 BXRE-27E4000-B-83 BXRE-30G0800-D-83 BXRE-50C4001-B-84 BXRH-40E4000-F-83 BXRE-40E6500-D-83 BXRE-27E4000-B-83 BXRE-27E4000-B-83 BXRE-27G30H0-D-82 BXRE-27G4000-B-83 BXRE-40E1000-B-83 BXRE-40E1000-B-83 BXRH-27G1000-B-83 BXRH-27G1000-B-83 BXRH-27G1000-B-83 BXRH-27G1000-B-83