

UMILEDS

Data Sheet

Version 1.0

LUMILEDS LUXEON CZ Starboards

Industry Leading High Powered LED Starboards

Lean & Fast. Made Smarter.

Superior Performance – Stay current with the highest intensity LEDs

Design Faster – Use industry standard starboards to shorten development time

Maximum Flexibility – Design to your exact specifications using the full spectrum of NewEnergy starboards

Rapid Innovation – Work with NewEnergy on your custom solution

Primary Applications




Architectural Emergency Vehicle Downlight Stage/concert Spot lighting Floodlight

Superior Performance with Flexible Options

- · Multiple color options for your application
- · Single focal length for all colors to ensure superior mixing
- Small source size reduces the size of secondary optics
- Prototype faster, test multiple options

Custom Solutions

NewEnergy operates facilities globally with ISO certifications for the LED lighting, automotive and medical industries. Our North Carolina based office provides quick engineering & sales support with an R&D lab for prototype development and custom solutions. Our in-house global manufacturing capabilities allow for both building in the United States as well as overseas at scale.

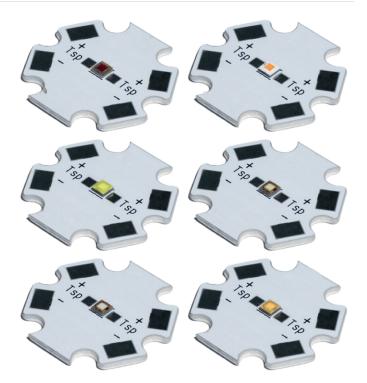

About NewEnergy

NewEnergy accelerates the adoption of LED technology through simple, modular products and custom designs. Through 30 years of experience, state of the art manufacturing, full traceability and advanced quality controls, NewEnergy offers leading solid state lighting components, modules and custom solutions. NewEnergy customers get to market faster, with less resources, at lower costs. Visit new-energyllc.com for more information.





Last Modified: 08/03/2021

LUMILEDS LUXEON CZ Starboards

Product Selection Guide

Part Number	CRI/Color	CCT/ Typical Peak Wavelength Range	Typical Viewing Angle	Typical Luminous Flux (mW)	Typical Forward Voltage (Vf)	Typical Wattage (W)
LST1-01H07-RED1-01	Red	624-634	120°	31	2.00	0.70
LST1-01H07-PCA1-01	Amber	n/a ⁽²⁾	120°	78	2.75	0.96
LST1-01H07-LME1-01	Lime	n/a ⁽²⁾	120°	122	2.75	0.96
LST1-01H07-GRN1-01	Green	520-540	120°	117	3.05	1.07
LST1-01H07-BLU1-01	Blue	465-485	120°	34	2.83	0.99
LST1-01H07-VLT1-01	Violet	420-430	120°	458	2.83	0.99
LST1-01H07-3080-01	80	3000K	120°	95	2.75	0.96
LST1-01H07-4080-01	80	4000K	120°	99	2.75	0.96

 $^{(1)}$ Flux, wavelength, and wattage values specified at 350mA, T, 85°C

⁽²⁾Amber and Lime starboards are binned by chromaticity coordinates, see LUMILEDS LED datasheet for values.


All values shown above are typical. Additional colors available upon request.

Maximum Ratings

Part Number	DC Current (A)	Tsp Temp (°C)	Power (W)
LST1-01H07-RED1-01	1.05	105	2.6
LST1-01H07-PCA1-01	1.05	105	3.7
LST1-01H07-LME1-01	1.23	105	4.3
LST1-01H07-GRN1-01	1.05	105	3.7
LST1-01H07-BLU1-01	1.05	105	3.7
LST1-01H07-VLT1-01	1.23	105	4.3
LST1-01H07-x080-01	1.23	105	4.3

.047 or .067

Mechanical Dimensions (Units: Inches)





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for High Power LEDs - Single Colour category:

Click to view products by New Energy manufacturer:

Other Similar products are found below :

GA CSSPM1.23-KTLP-W3-0-350-R18 L135-L567003500000 L1CU-VLT1000000000 L1C1-VLT1000000000 KY DDLM31.FY-8H7J-5F5G-W4A4-140-R18 KY DDLM31.23-8F5H-36-C4U4-140-R18 LS G6SP.01-7C8D-68-G3R3 KR DDLM31.23-5G7H-25-C4U4-140-R18 KT DDLM31.13-6H7J-36-W4A4-140-R18 KS DDLM31.23-8E6G-68-C4U4-140-R18 KB DDLM31.13-6D7E-25-24A4-140-R18 GT CS8PM1.13-LSLU-26-1-350-B-R18 L128-PCB1003500000 GH CS8PM1.24-4T2U-1-0-350-R33 GT CSHPM1.13-LSLU-26-1-350-B-R18 XPEBRY-L1-0000-00S02 XQEBLU-00-0000-000000Z02 SPHWH2L3D30ED4V0H3 XQEBLU-00-0000-000000202 LUWCQ7P-LPLR-5E8G-1-K LTPL-C034UVH410 XPEBBL-L1-R250-00302 XPEROY-L1-0000-00B02 GD CSSPM1.14-UOVJ-W4-1 LST1-01F06-GRN1-00 KY DMLQ31.23-HYKX-46-J3T3 GD CS8PM1.14-UOVJ-W4-1 XQEEPR-00-0000-000000A01-SB01 LST1-01G01-UV02-00 LST1-01F06-RYL1-00 LST1-01F06-FRD1-00 LST1-01G01-UV01-00 LST1-01G01-PRD1-00 XQEROY-00-0000-000000Q01-SB01 LST1-01G01-UV03-00 LST1-01G01-RYL1-00 L135-A589003500000 L135-L567L00000000 L1C1-GRN100000000 LA G6SP-DAFA-24-1 LS G6SP-CADB-1-1-Z LY H9PP-HZJZ-46-1 SMTL6-RC MLEBLU-A1-0000-000001 MLEBLU-A1-0000-000005 MLEGRN-A1-0000-00011 MLEGRN-A1-0000-000X02 MLESRD-A1-0000-000W01 XBDAMB-00-0000-000000701 XBDAMB-00-0000-000000801