

NHD-0440WH-ATMI-JT#

Character Liquid Crystal Display Module

| | |
|-------|---|
| NHD- | Newhaven Display |
| 0440- | 4 Lines x 40 Characters |
| WH- | Display Type: Character |
| A- | Model |
| T- | White LED Backlight |
| M- | STN Negative, Blue |
| I- | Transmissive, 6:00 Optimal View, Wide Temp. |
| JT#- | English and Japanese Standard Font |

RoHS Compliant

Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com

nhsales@newhavendisplay.com



Document Revision History

| Revision | Date | Description | Changed by |
|----------|------------|--|------------|
| 0 | 10/21/2008 | Initial Release | - |
| 1 | 11/3/2009 | User Guide Reformat | MC |
| 2 | 11/16/2009 | Updated Block diagram and initialization code | MC |
| 3 | 12/16/2009 | Updated Backlight Supply Current | MC |
| 4 | 1/4/2011 | Update 2 nd controller information | JT |
| 5 | 5/6/2011 | Electrical characteristics updated | AK |
| 6 | 10/7/16 | Mechanical Drawing, Electrical & Optical Char. Updated | TM |
| 7 | 3/14/18 | Electrical Drawing Updated | SB |
| 8 | 5/25/18 | Clarification: $V_{LCD} = V_{DD} - V_0$ | SB |
| 9 | 4/29/21 | Mechanical Drawing Updated | ZP |

Functions and Features

- 4 lines x 40 characters
- 2 Built-in controllers (ST7066U)
- +5.0V Power Supply
- 1/16 duty, 1/5 bias
- RoHS compliant

Mechanical Drawing

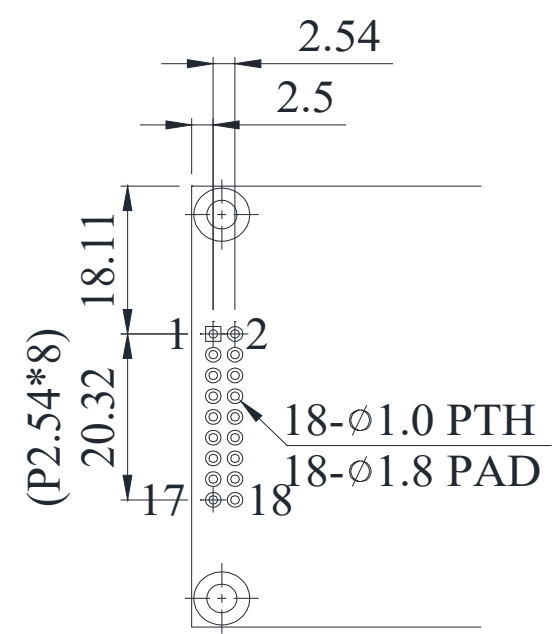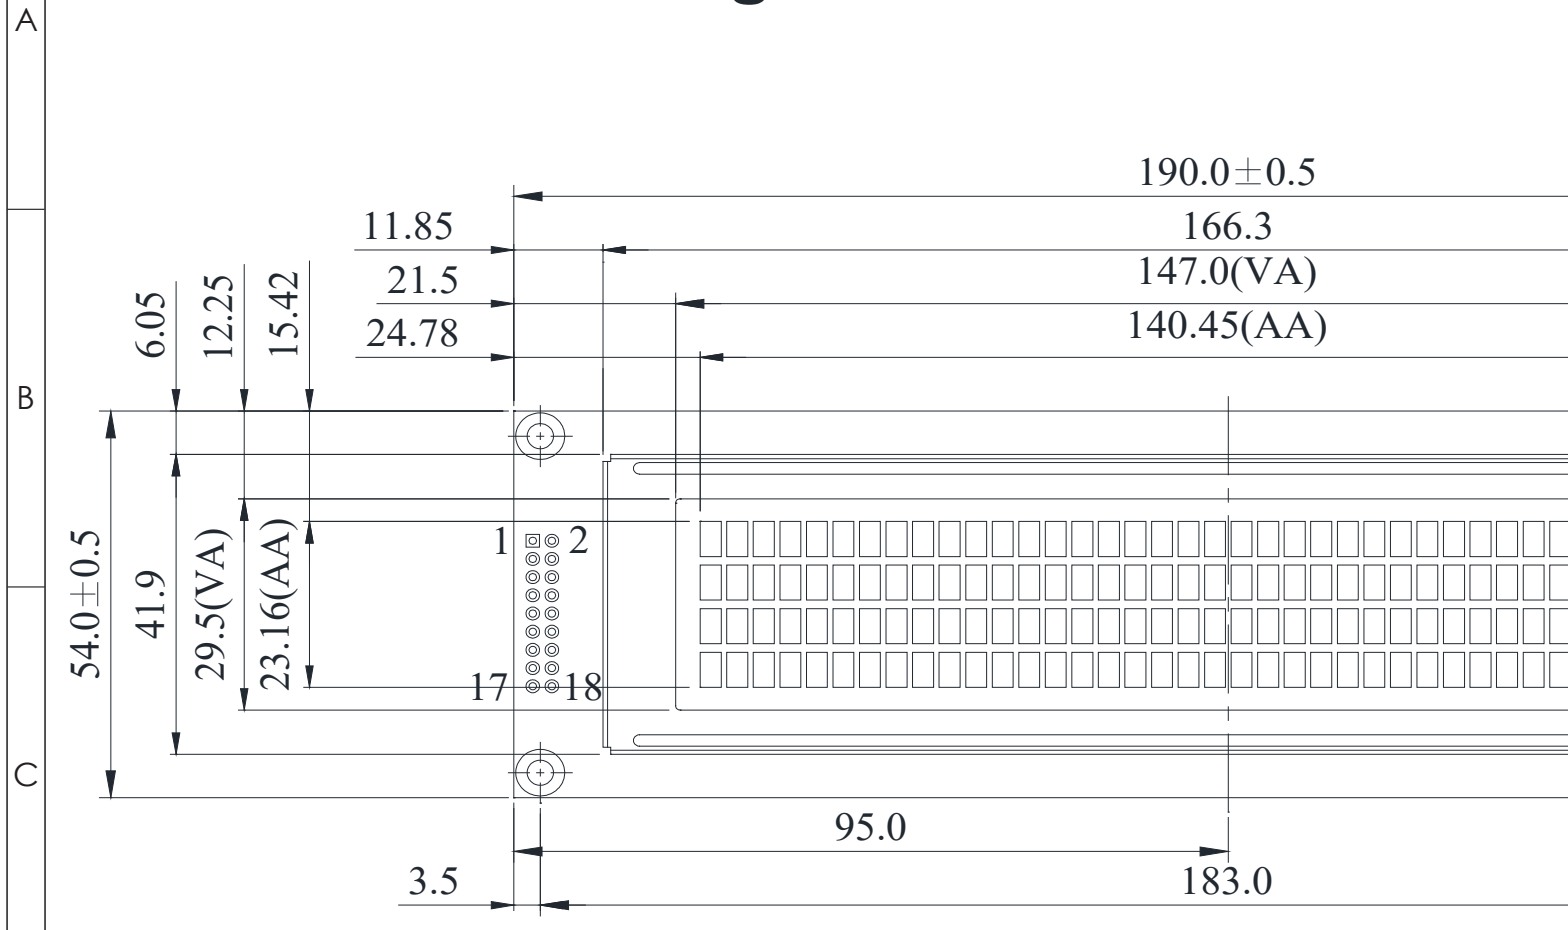

Notes:


- Driving: 1/16 duty, 1/5 bias
- Voltage: +5V Power Supply
- Display Type: STN (Negative) Blue
- Optimal View: 6:00
- Backlight: White LED
- Driver IC: ST7066U 8/4-bit MPU Interface

Pin Description and Wiring Diagram

| Pin No. | Symbol | External Connection | Function Description |
|---------|-----------------|---------------------|---|
| 1-4 | DB7-DB4 | MPU | Four high order bi-directional three-state data bus lines. |
| 5-8 | DB3-DB0 | MPU | Four low order bi-directional three-state data bus lines. These four are not used during 4-bit operation. |
| 9 | E1 | MPU | Operation Enable signal. Falling edge triggered for top 2 lines. |
| 10 | R/W | MPU | Read/Write select signal, R/W=1: Read R/W:=0: Write |
| 11 | RS | MPU | Register Select signal. RS=0: Command, RS=1: Data |
| 12 | V ₀ | Power Supply | Power Supply for contrast (approx. 0.65V) |
| 13 | V _{SS} | Power Supply | Ground |
| 14 | V _{DD} | Power Supply | Power Supply voltage for logic (+5.0V) |
| 15 | E2 | MPU | Operation enable signal. Falling edge triggered for bottom 2 lines. |
| 16 | NC | - | No Connect |
| 17 | LED+ | Power Supply | Backlight Anode (+3.5V) |
| 18 | LED- | Power Supply | Backlight Cathode (Ground) |

Recommended LCD connector: 2.54mm pitch pins

Backlight connector: --- **Mates with:** ---

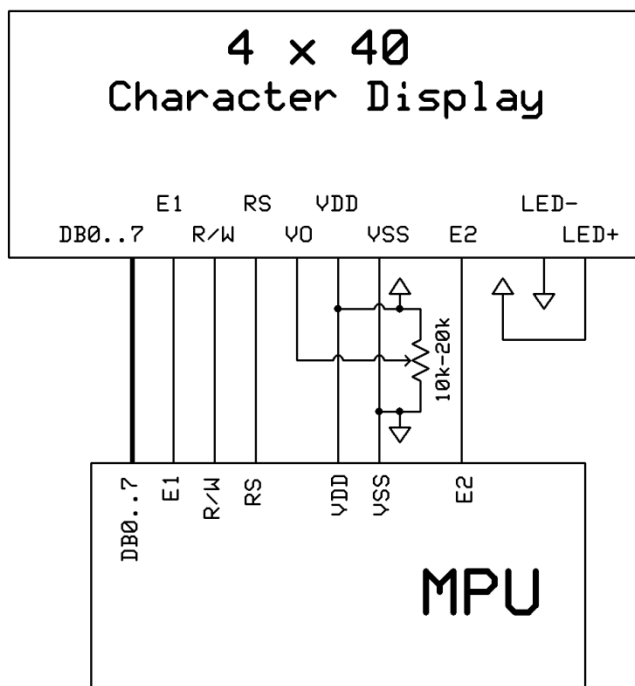

Electrical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|----------------------------------|------------------------|-----------------------|--------|-----------------|------|
| Operating Temperature Range | T _{OP} | Absolute Max | -20 | - | +70 | °C |
| Storage Temperature Range | T _{ST} | Absolute Max | -30 | - | +80 | °C |
| Supply Voltage | V _{DD} | - | 4.5 | 5.0 | 5.5 | V |
| Supply Current | I _{DD} | T _a =25°C, | 1.8 | 3.5 | 7.0 | mA |
| Supply for LCD (contrast) | V _{DD} - V ₀ | V _{DD} =5.0V | 4.2 | 4.35 | 4.5 | V |
| "H" Level input | V _{IH} | - | 0.7 * V _{DD} | - | V _{DD} | V |
| "L" Level input | V _{IL} | - | 0 | - | 0.6 | V |
| "H" Level output | V _{OH} | - | 3.9 | - | V _{DD} | V |
| "L" Level output | V _{OL} | - | 0 | - | 0.4 | V |
| | | | | | | |
| Backlight Supply Voltage | V _{LED} | - | 3.4 | 3.5 | 3.6 | V |
| Backlight Supply Current | I _{LED} | V _{LED} =3.5V | 20 | 64 | 80 | mA |
| Backlight Lifetime | - | 25°C, 50-60%RH | - | 50,000 | - | Hrs. |

Optical Characteristics

| Item | | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------|----------------|------------------------|------|------|------|------|
| Optimal Viewing Angles | Top | φY+ | CR ≥ 2 | - | 20 | - | ° |
| | Bottom | φY- | | - | 40 | - | ° |
| | Left | θX- | | - | 30 | - | ° |
| | Right | θX+ | | - | 30 | - | ° |
| Contrast Ratio | | CR | - | - | 3 | - | - |
| Response Time | Rise | T _R | T _{OP} = 25°C | - | 150 | 200 | ms |
| | Fall | T _F | | - | 150 | 200 | ms |

Controller Information

Built-in ST7066U Controller.

Please download specification at http://www.newhavendisplay.com/app_notes/ST7066U.pdf

DDRAM Address

| | | | | | | | | | | | | | | | | | | | |
|----------|----------|----------|----------|----------|---|---|---|---|---|---|---|---|---|---|-----------|-----------|-----------|-----------|-----------|
| 1 | 2 | 3 | 4 | 5 | - | - | - | - | - | - | - | - | - | - | 36 | 37 | 38 | 39 | 40 |
| 00 | 01 | 02 | 03 | 04 | - | - | - | - | - | - | - | - | - | - | 23 | 24 | 25 | 26 | 27 |
| 40 | 41 | 42 | 43 | 44 | - | - | - | - | - | - | - | - | - | - | 63 | 64 | 65 | 66 | 67 |
| 00 | 01 | 02 | 03 | 04 | - | - | - | - | - | - | - | - | - | - | 23 | 24 | 25 | 26 | 27 |
| 40 | 41 | 42 | 43 | 44 | - | - | - | - | - | - | - | - | - | - | 63 | 64 | 65 | 66 | 67 |

Table of Commands

| Instruction | Instruction code | | | | | | | | | | Description | Execution time (fosc=270 KHZ) | |
|----------------------------|------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|--|--------|
| | RS | R/W | DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 | | | |
| Clear Display | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | Write "20H" to DDRAM and set DDRAM address to "00H" from AC | 1.52ms |
| Return Home | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | - | Set DDRAM Address to "00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed. | 1.52ms |
| Entry mode Set | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | I/D | SH | Sets cursor move direction and specifies display shift. These parameters are performed during data write and read. | 37μs |
| Display ON/OFF control | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | D | C | B | D=1: Entire display on C=1: Cursor on B=1: Blinking cursor on | 37μs |
| Cursor or Display shift | 0 | 0 | 0 | 0 | 0 | 0 | 1 | S/C | R/L | - | - | Sets cursor moving and display shift control bit, and the direction without changing DDRAM data. | 37μs |
| Function set | 0 | 0 | 0 | 0 | 0 | 1 | DL | N | F | - | - | DL: Interface data is 8/4 bits N: Number of lines is 2/1 F: Font size is 5x11/5x8 | 37μs |
| Set CGRAM Address | 0 | 0 | 0 | 1 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | | Set CGRAM address in address counter | 37μs |
| Set DDRAM Address | 0 | 0 | 1 | AC6 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | | Set DDRAM address in address counter. | 37μs |
| Read busy Flag and Address | 0 | 1 | BF | AC6 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | | Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read. | 0s |
| Write data To Address | 1 | 0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | Write data into internal RAM (DDRAM/CGRAM). | 37μs |
| Read data From RAM | 1 | 1 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | Read data from internal RAM (DDRAM/CGRAM). | 37μs |

Timing Characteristics

Writing data from MPU to ST7066U



| Write Mode (Writing data from MPU to ST7066U) | | | | | | |
|---|-----------------------|-----------------|------|---|----|----|
| T_C | Enable Cycle Time | Pin E | 1200 | - | - | ns |
| T_{PW} | Enable Pulse Width | Pin E | 140 | - | - | ns |
| T_R, T_F | Enable Rise/Fall Time | Pin E | - | - | 25 | ns |
| T_{AS} | Address Setup Time | Pins: RS,RW,E | 0 | - | - | ns |
| T_{AH} | Address Hold Time | Pins: RS,RW,E | 10 | - | - | ns |
| T_{DSW} | Data Setup Time | Pins: DB0 - DB7 | 40 | - | - | ns |
| T_H | Data Hold Time | Pins: DB0 - DB7 | 10 | - | - | ns |

Reading data from ST7066U to MPU



| Read Mode (Reading Data from ST7066U to MPU) | | | | | | |
|--|-----------------------|-----------------|------|---|-----|----|
| T_C | Enable Cycle Time | Pin E | 1200 | - | - | ns |
| T_{PW} | Enable Pulse Width | Pin E | 140 | - | - | ns |
| T_{R}, T_F | Enable Rise/Fall Time | Pin E | - | - | 25 | ns |
| T_{AS} | Address Setup Time | Pins: RS,RW,E | 0 | - | - | ns |
| T_{AH} | Address Hold Time | Pins: RS,RW,E | 10 | - | - | ns |
| T_{DDR} | Data Setup Time | Pins: DB0 - DB7 | - | - | 100 | ns |
| T_H | Data Hold Time | Pins: DB0 - DB7 | 10 | - | - | ns |

Built-in Font Table

| b7-b4 b3-b0 | 0000 | 0001 | 0010 | 0011 | 0100 | 0101 | 0110 | 0111 | 1000 | 1001 | 1010 | 1011 | 1100 | 1101 | 1110 | 1111 |
|----------------|------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 0000 | CG RAM (1) | | | 0 | a | P | ^ | F | | | | — | 9 | 3 | o | p |
| 0001 | (2) | | ! | 1 | A | Q | a | A | | | e | F | 7 | G | ä | g |
| 0010 | (3) | | " | 2 | B | R | b | r | | | " | 4 | W | X | B | e |
| 0011 | (4) | | # | 3 | C | S | c | s | | | l | 9 | T | E | e | * |
| 0100 | (5) | | * | 4 | D | T | d | t | | | \ | I | f | P | u | a |
| 0101 | (6) | | % | 5 | E | U | e | u | | | . | 7 | 6 | 1 | o | 0 |
| 0110 | (7) | | & | 6 | F | V | f | v | | | 7 | 0 | 2 | 3 | p | z |
| 0111 | (8) | | ' | 7 | G | W | g | w | | | 7 | * | 7 | 9 | g | n |
| 1000 | (1) | | < | 8 | H | X | h | x | | | 4 | 9 | * | U | r | X |
| 1001 | (2) | | > | 9 | I | Y | i | y | | | o | 7 | 7 | U | 7 | Y |
| 1010 | (3) | | * | : | J | Z | j | z | | | z | o | n | v | j | 7 |
| 1011 | (4) | | + | : | K | L | k | l | | | * | 9 | E | o | * | n |
| 1100 | (5) | | , | < | L | 7 | l | l | | | 7 | 9 | 7 | 7 | o | n |
| 1101 | (6) | | — | = | M | J | m | j | | | u | z | \ | 7 | t | ÷ |
| 1110 | (7) | | . | > | N | ^ | n | ^ | | | z | E | 7 | 7 | n | |
| 1111 | (8) | | / | ? | O | _ | o | ← | | | u | U | 7 | " | o | ■ |

Example Initialization Program

```
/******  
void command1(char i) //Top half of the display  
{  
P1 = i;  
W = 0;  
RS = 0;  
E1 = 1;  
delay(2);  
E1 = 0;  
}  
void command2(char i) //Bottom half of the display  
{  
P1 = i;  
W = 0;  
RS = 0;  
E2 = 1;  
delay(2);  
E2 = 0;  
}  
/******  
void writedata1(char i) //Top half of the display  
{  
P1 = i;  
W = 0;  
RS = 1;  
E1 = 1;  
delay(2);  
E1 = 0;  
}  
void writedata2(char i) //Bottom half of the display  
{  
[9]  
P1 = i;  
W = 0;  
RS = 1;  
E2 = 1;  
delay(2);  
E2 = 0;  
}  
/******  
void init_LCD()  
{  
delay(15);  
command1(0x30); //Wake up  
command2(0x30);  
delay(5);  
command1(0x30); //Wake up  
command2(0x30);  
delay(5);  
command1(0x30); //Wake up  
command2(0x30);  
delay(5);  
command1(0x38); //Function Set = 8bit mode; 2-line; 5x8  
command2(0x38);  
command1(0x08); //Turn off display  
command2(0x08);  
command1(0x01); //Clear display  
command2(0x01);  
command1(0x06); //Entry mode cursor increment  
command2(0x06);  
command1(0x0c); //Turn on display; no cursor  
command2(0x0c);  
}  
/******
```

Quality Information

| Test Item | Content of Test | Test Condition | Note |
|---------------------------------------|---|---|------|
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +80°C , 200hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -30°C , 200hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time. | +70°C , 200hrs | 2 |
| Low Temperature Operation | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time. | -20°C , 200hrs | 1,2 |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +60°C , 90% RH , 96hrs | 1,2 |
| Thermal Shock resistance | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress. | -20°C, 30min -> 25°C, 5min -> 70°C, 30min = 1 cycle For 10 cycles | |
| Vibration test | Endurance test applying vibration to simulate transportation and use. | 10-55Hz, 1.5mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes | 3 |
| Static electricity test | Endurance test applying electric static discharge. | VS=800V, RS=330kΩ, CS=150pF For 10 times | |

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information

See Terms & Conditions at http://www.newhavendisplay.com/index.php?main_page=terms

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LCD Character Display Modules & Accessories](#) category:

Click to view products by [Newhaven Display](#) manufacturer:

Other Similar products are found below :

[HG9Z-AC501](#) [HG9Z-SCI25B](#) [LCM-S01602DTRA-3](#) [HG9Z-XC213](#) [EA FL-10P](#) [MDLS-161612-G-LV-LED4G](#) [MDLS-81809-LV-GLED4G](#)
[MDLS-20265-LV-GLED4G](#) [NMTC-S16205DFYHSAY-22](#) [NHD-0420AZ-FSW-GBW-33V33-0](#) [CM1644-SGR1](#) [162A BC BW](#) [LCM-](#)
[S02002DSM-Y](#) [162D BA BC](#) [HDM24216H-2-P9XS](#) [DEM 16207 SYH-PY](#) [RC0802A1-LLG-JWVE](#) [RC0802A1-LLR-JWVE](#) [RC0802A-](#)
[TIW-ESV](#) [RC1202A-BIY-CSX](#) [RC1202A-BIY-ESX](#) [RC1602A-BIW-CSV](#) [RC1602A-YHW-CSV](#) [RC1602B-GHY-CSXD](#) [RC1602B-TIW-](#)
[CSV](#) [RC1602B-YHY-CSVD](#) [RC1602D-GHY-ESX](#) [RC2002A2-LLB-JSVE](#) [RC2002A-GHG-CSV](#) [RC2004A-BIW-ESX](#) [RC2004A-GHW-](#)
[CSV](#) [RC2004A-LLB-JSVE](#) [RC2004A-LLH-JSV](#) [RC2004A-LLR-JSVE](#) [DEM 08171 SYH-LY](#) [DEM 08172 SYH-PY](#) [DEM16101SYH-LY](#)
[DEM 16209 SBH-PW-N](#) [DEM 16210 SGH](#) [DEM 16214 FGH-PW](#) [DEM 16216 FDH-P\(RGB\)-N](#) [DEM16216SYH-LY](#) [DEM 16217 SYH-PY](#)
[DEM 16221 SYH](#) [DEM 16221 SYH \(FFCF/TR\)/V](#) [DEM 16227 FGH-PW](#) [DEM 16227 SBH-PW-N](#) [DEM 16227 SYH-LY](#) [DEM 20231 SYH-](#)
[PY-CYR22](#) [DEM 20232 SBH-PW-N](#)