



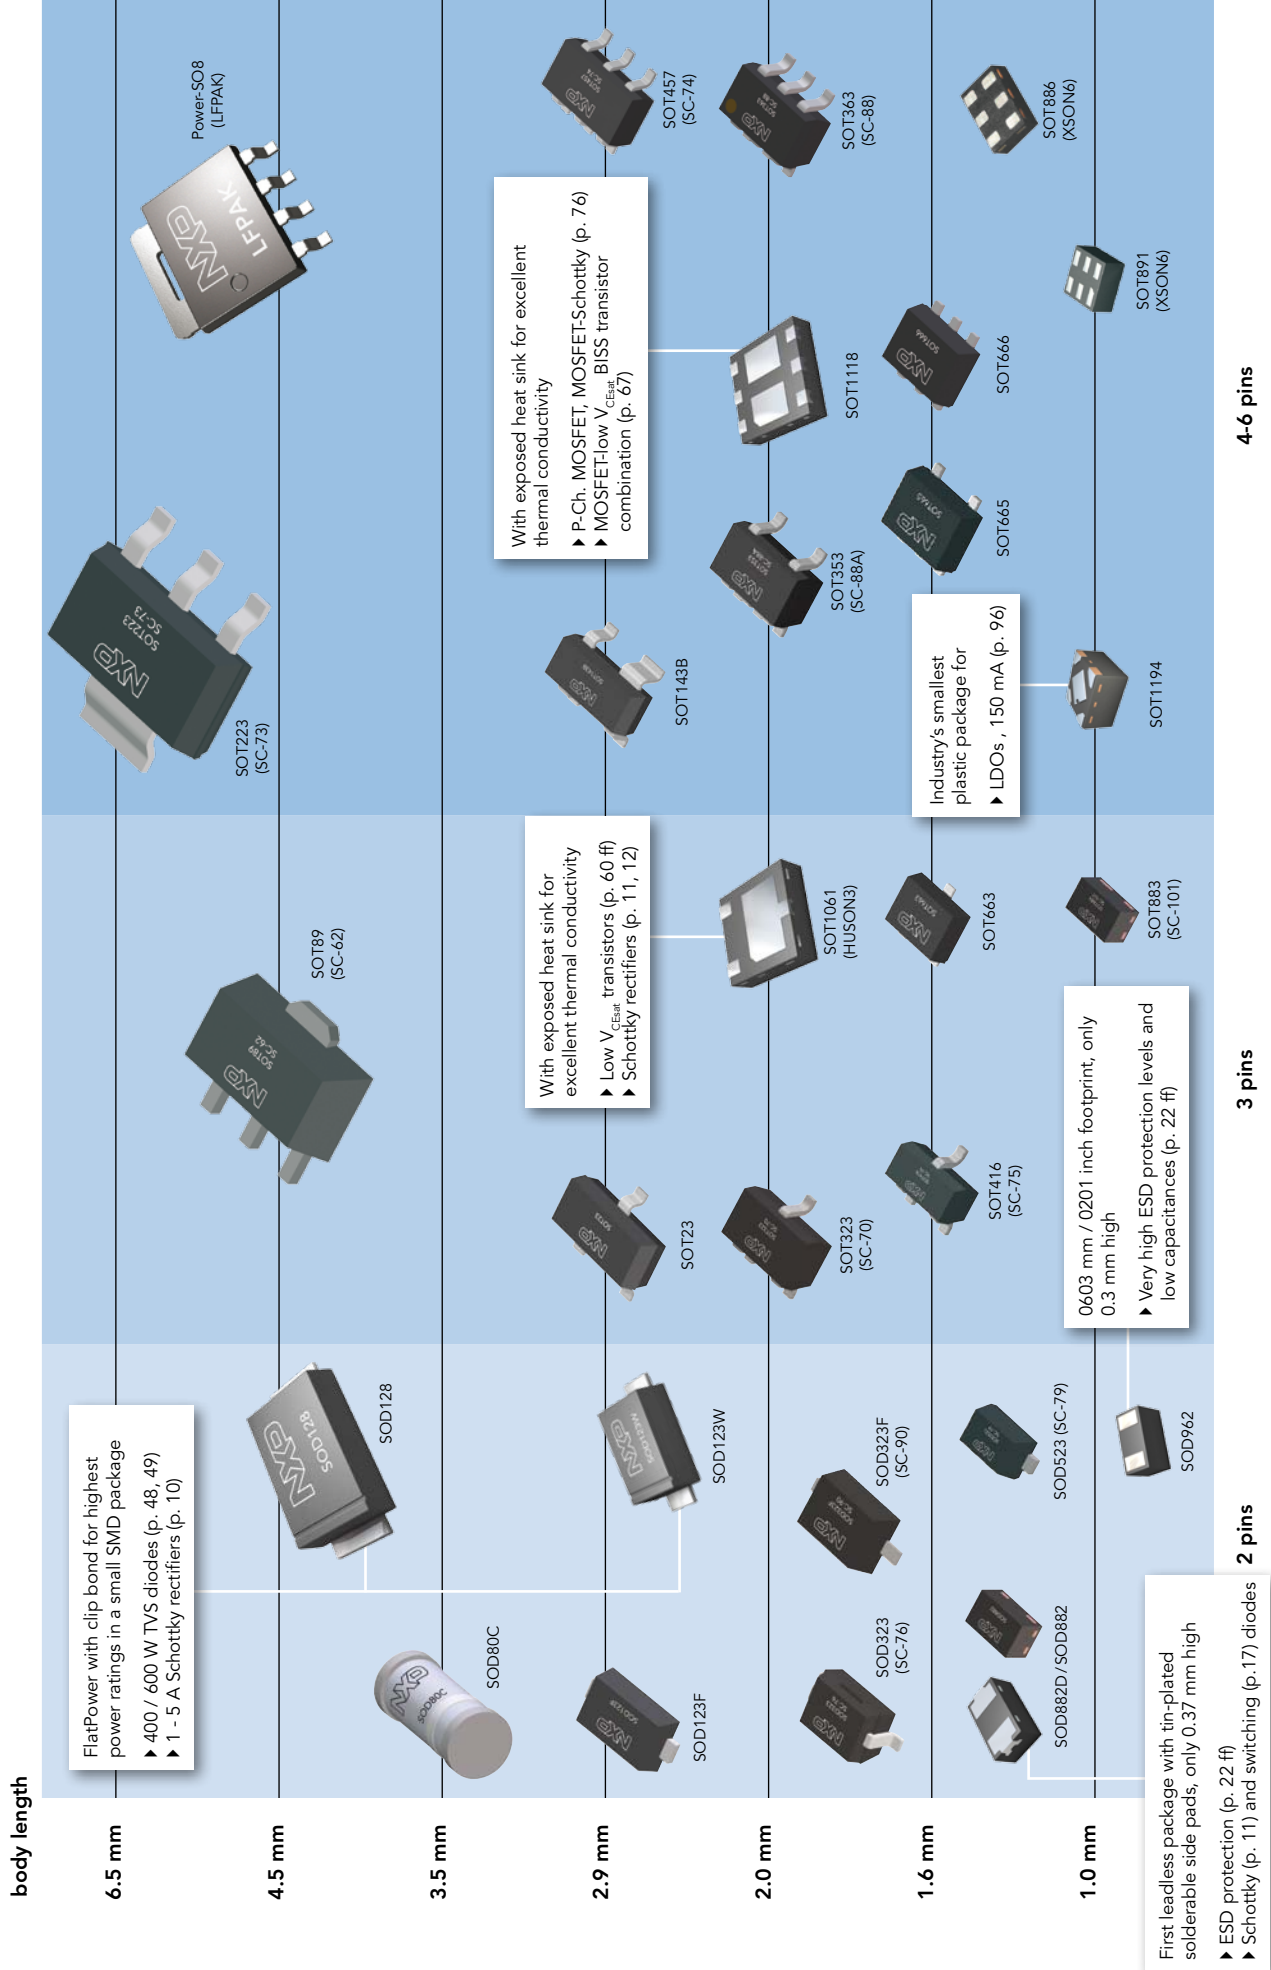
Discrete Semiconductors Selection Guide 2011

Diodes, protection and signal conditioning devices,
bipolar transistors, MOSFETs, thyristors



Discrete Semiconductors packages – portfolio and highlights

Small SMD packages with 2 - 6 pins



The first leadless package with solderable side pads

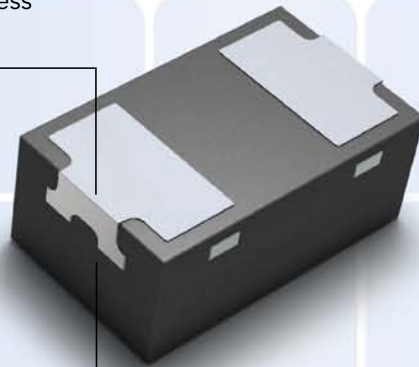
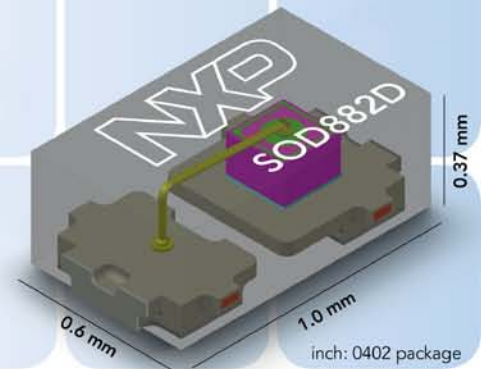
Solderable (Tin-plated) exposed side pads

- ▶ Easy visible inspection of solder pads
- ▶ Very high mechanical robustness
- ▶ Post-soldering stability

Full thermal, electrical, mounting and footprint compatibility to leadless 1006 mm packages (inch: 0402)
▶ **Height only 0.37 mm**

Built for a range of functions

- ▶ Protection, Switching and Schottky diodes
- ▶ **Ideal for small and thin devices**



Get ready to improve your ultra-flat PCB design with our SOD882D package.

<http://standardproducts.nxp.com>



Table of Contents

Support tools	6
---------------	---

Diodes 7

Schottky barrier diodes and rectifiers	8
General purpose Schottky diodes ≤ 250 mA	8
Low capacitance Schottky diodes	9
Medium power low V_F Schottky rectifiers single ≥ 200 mA	10
Medium power low V_F Schottky rectifiers dual ≥ 200 mA	12
Improved forward characteristics of (MEGA) Schottky rectifiers in new packages	13
Zener diodes	14
General purpose Zener diodes	14
Zener diodes specifications	15
Switching diodes	16
General purpose switching diodes ≤ 100 V	16
General purpose switching diodes > 100 V	18
Controlled avalanche switching diodes	19
Low leakage current switching diodes	19
Power diodes	20
Ultrafast recovery power diodes	20
Hyperfast power diodes	20

Protection and signal conditioning 21

Standard ESD protection devices	22
Low capacitance ESD protection devices	24
ESD protection for very high speed interfaces (< 2 pF)	28
Application-specific ESD and ESD/EMI solutions	32
Audio interfaces	32
Video interfaces	32
Multichannel EMI filters, ESD protection for LCD and camera	36
SD-, SIM-card and MMC	42
Battery and charger protection	42
USB, SATA, LAN	43
Automotive LIN/CAN/FlexRay	47
TVS diodes	48
TVS diodes, 24 W / 40 W	48
TVS diodes, 400 W	48
TVS diodes, 600 W	49

Bipolar transistors 51

General purpose bipolar transistors	52
Single transistors NPN	52
Single transistors PNP	52
Double transistors	53
Single and double switching transistors	53
Medium power general purpose transistors	54
High voltage transistors	54
Low noise transistors	54
Matched pair transistors	55
Darlington transistors	56
Schmitt trigger	56
MOSFET driver	57
Medium frequency transistors	57

Support tools

Check the NXP Standard Products Portal www.standardproducts.nxp.com

Your first stop for NXP's wide range of diodes, bipolar transistors, MOSFETs, thyristors and ESD protection products. The gateway focuses on:

- Product and application information
- Recently launched products
- News items and related documents
- Design hints, with simple solutions to some of today's common design challenges, incl. energy efficiency, integration, packaging, and protection



Direct links to popular design support tools and items:

Datasheets

http://standardproducts.nxp.com/all_datasheets

Find cross references of industry type numbers and download X-Reference offline tool

<http://www.nxp.com/search/advanced>

Application notes

http://standardproducts.nxp.com/all_appnotes

Sales literature

http://standardproducts.nxp.com/all_literature

Selection Guide (download pdf file)

http://www.nxp.com/discrete_selection_guide

Models and test data

<http://www.nxp.com/models>

Technical support portal

http://www.nxp.com/technical_support





FAQ (Frequently Asked Questions) Discretes

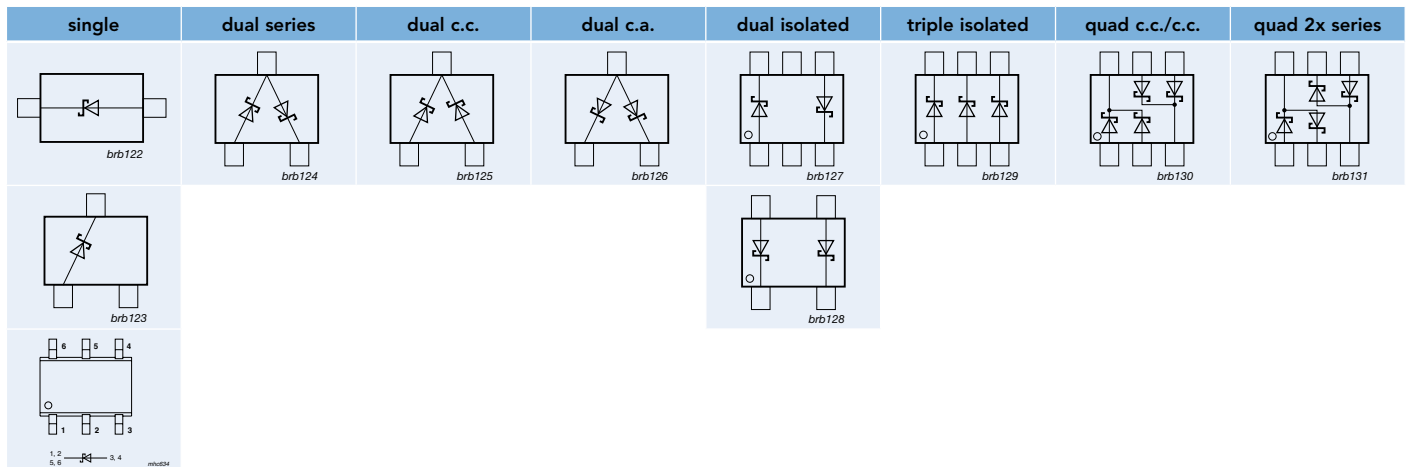
http://www.nxp.com/faq_discretes

Direct support needed? Find complete contact information to your regional NXP sales offices and distributors






<http://www.nxp.com/profile/sales>

General purpose Schottky diodes ≤ 250 mA




















I_F max (mA)	V_F max (V)	V_F max (mV)	@ I_F (mA)	I_R max (μA)	@ V_R (V)	Package	SOD80C (MiniMelf)	SOD68 (DO-34)	SOT23	SOT143B	
											
							Size (mm)	3.5 x 1.5 x 1.5	3.04 x 1.6 x 0.55	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0
P_{tot} (mW)	300	500	250	250							
70	70	750	10	0.1	50	single			BAS70		
						dual series			BAS70-04		
						dual c.c.			BAS70-05		
						dual c.a.			BAS70-06		
						dual isolated				BAS70-07	
						triple isolated					
120	40	500	10	1	30	quad 2x series					
						single					
						single			BAS40		
						dual series			BAS40-04		
						dual c.c.			BAS40-05		
						dual c.a.			BAS40-06		
200	30	300	10	30	10	dual isolated					
						triple isolated					
						quad 2x series					
		400	10	2	2	25	single			BAT754	
							single			BAT754S	
							dual series			BAT754C	
							dual c.c.			BAT754A	
							dual c.a.				
							triple isolated				
	500	200	30	10	10	single	BAS85	BAT85	BAT54		
						dual series			BAT54S		
						dual c.c.			BAT54C		
	600	200	1	10	10	dual c.a.			BAT54A		
						dual isolated				BAT74	
						triple isolated					
	40	300	10	15	30	quad c.c./c.c.					
						quad 2x series					
						single			BAT721		
360		10	0.5	25	25	dual series			BAT721S		
						dual c.c.			BAT721C		
						dual c.a.			BAT721A		
420		30	0.5	25	25	single					
						single					
						dual series					
50	450	10	5	40	dual c.c.						
					dual c.a.						
					single	BAS86	BAT86				
250	100	850	250	4	75	single					



Medium power low V_F Schottky rectifiers single ≥ 200 mA

I_F max (A)	V_R max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Package	SOD128	SOT457 (SC-74)	SOT23	SOD123W	SOD123F	
										
				Size (mm)	3.8 x 2.5 x 1.0	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.6 x 1.7 x 1.0	2.6 x 1.6 x 1.1	
				P_{tot} (mW) @ 1 cm ²	1050	540	420	950	830	
Optimization										
0.2	30	480	0.04	low V_F						
	40	600	0.01	low I_R						
	60	600	0.1	low V_F						
0.5	20	390	0.2	low V_F			PMEG2005ET		PMEG2005EH	
		440	1.5	low V_F						
		480	0.01	low I_R						
	30	500	0.03	low I_R						
		430	0.15	low V_F			PMEG3005ET		PMEG3005EH	
		500	0.5	low V_F						
40	470	0.1	low V_F			PMEG4005ET		PMEG4005EH		
	550	0.1	low V_F			BAT720				
1.0	20	340	1	low V_F				PMEG2010ER		
		375	1.9	low V_F						
		430	0.2	low V_F			PMEG2010AET		PMEG2010AEH	
		450	0.05	low I_R				PMEG2010BER		
		500	0.2	low V_F			PMEG2010ET		PMEG2010EH	
		550	0.07	low I_R						
	30	450	1.0	low V_F			1PS74SB23			
		360	1.5	low V_F	PMEG3010EP			PMEG3010ER		
		450	0.05	low I_R	PMEG3010BEP			PMEG3010BER		
		520	0.05	low I_R					PMEG3010CEH	PMEG3010EH
		560	0.15	low V_F			PMEG3010ET			
		680	0.5	low V_F						
	40	490	0.05	low V_F	PMEG4010EP			PMEG4010ER		
		640	0.1	low V_F			PMEG4010ET		PMEG4010EH	PMEG4010CEH
		570	0.05	low I_R						
60	530	0.06	low V_F	PMEG6010EP			PMEG6010ER			
	650	0.35	low V_F			PMEG6010AED				
	660	0.05	low I_R					PMEG6010CEH		
1.5	20	660	0.07	low I_R				PMEG2015EH		
	30	550	1.0	low V_F				PMEG3015EH	PMEG1020EH	
2.0	10	460	3.0	low V_F						
		420	1.9	low V_F					PMEG2020EH	
	30	525	0.2	low V_F						
		360	3.0	low V_F	PMEG3020EP					
		420	1.5	low V_F	PMEG3020CEP			PMEG3020ER		
		450	0.1	low I_R	PMEG3020BEP					
		470	2.5	low V_F						
		520	0.05	low I_R	PMEG3020DEP			PMEG3020BER		
	40	620	1.0	low V_F					PMEG3020EH	
		490	0.1	low V_F	PMEG4020EP			PMEG4020ER		
60	535	0.1	low V_F							
	530	0.15	low V_F	PMEG6020EP			PMEG6020ER			
3.0	10	530	3.0	low V_F					PMEG1030EH	
		360	5.0	low V_F	PMEG3030EP					
	30	450	0.15	low I_R	PMEG3030BEP					
		490	0.2	low V_F	PMEG4030EP					
		540	0.1	low I_R				PMEG4030ER		
60	530	0.2	low V_F	PMEG6030EP						
5.0	30	360	8.0	low V_F	PMEG3050EP					
		450	0.25	low I_R	PMEG3050BEP					
40	490	0.3	low V_F	PMEG4050EP						

Medium power low V_F Schottky rectifiers dual ≥ 200 mAtypes in **bold** represent new products

I_F max (A)	V_R max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Optimization	Package	SOT223 (SC-73)	SOT23	SOT1061	SOT666
									
						Size (mm)	6.5 x 3.5 x 1.65	2.9 x 1.3 x 1.0	2.0 x 2.0 x 0.65
P_{tot} (mW)	1500	250	1000	300					
0.2	30	480	0.03	low V_F	dual isolated 				PMEG3002TV
	60	600	0.1	low V_F					PMEG6002TV
0.5	20	390	0.2	low V_F	dual c.c. 			PMEG2005CT	
	30	430	0.15	low V_F				PMEG3005CT	
	40	470	0.1	low V_F				PMEG4005CT	
1.0	25	450	1.0	low V_F	dual series 	BAT120S			
				low V_F	dual c.c. 	BAT120C			
				low V_F	dual c.a. 	BAT120A			
	40	500	0.05	low V_F	dual c.c. 				PMEG4010CPA
				low V_F	dual c.c. 				PMEG6010CPA
	60	650	0.35	low V_F	dual series 	BAT160S			
				low V_F	dual c.c. 	BAT160C			
low V_F				dual c.a. 	BAT160A				
2.0	20	420	1.0	low V_F	dual c.c. 				PMEG2020CPA
	30	440	2.0	low V_F	dual c.c. 				PMEG3020CPA

In the Spotlight

Medium power single and dual Schottky rectifiers in SOT1061

Small (2 x 2 x 0.65 mm) leadless medium power package SOT1061


































Exposed heat sink for excellent thermal and electrical performance ($P_{tot} > 1$ W)High forward-current capability (I_F up to 2 A) with low forward voltage dropHigh reverse voltage (V_R up to 60 V)

AEC-Q101 qualified



General purpose Zener diodes

types in **bold** represent new products

I_f max (mA)	P_{ZSM} (W)	V_z nom (V)	V_z tolerance	Note	Configuration	Series	Package	Size (mm)	P_{tot} (mW)
500	-	3.3~24	C	Eur	single 	1N47xxA series		4.8 x 2.6 x 0.81	1000
	60	3.6~75				BZV85 series			
250	-	2.4~36	about 2%	special	single 	NZX series		4.25 x 1.85 x 0.56	400
	40	2.4~75	B, C	Eur		BZX79 series			
400	40	2.4~75	C	Eur	single 	BZV90 series		6.5 x 3.5 x 1.65	1500
250	40	2.4~75	C	Eur	single 	BZV49 series		4.5 x 2.5 x 1.5	1000
250	40	2.4~75	B, C	Eur	single 	BZV55 series		3.5 x 1.5 x 1.5	300
200	40	2.4~75	B, C	Eur	dual c.a. 	BZB84 series		2.9 x 1.3 x 1.0	250
250	30		A, B, C		single 	BZX84 series			
		0.2 V	Ave	dual c.a. 	PLVA600A series				
250	-	3.0~30	about 2.5%	special	single 	NZH series		2.6 x 1.6 x 1.1	830
	40	2.4~75	B, C	Eur		BZT52H series			
200	40	2.7~24	B2	Jap	dual isolated 	PZUxDB2 series		2.0 x 1.25 x 0.95	300
200	40	2.4~15	C	Eur	dual c.a. 	BZB784 series		2.0 x 1.25 x 0.95	350
200	30	100	C	Eur	back-to-back 	BZB100A		1.7 x 1.25 x 0.95	300
	40	2.4~36	B2	Jap	single 	PDZ-B series			
250	40	2.4~75	B, C	Eur		BZX384 series			
200	40	2.4~36	B, B1, B2, B3	Jap		PZUxBA series			
200	60	100	C	Eur	single 	BZX100A		1.7 x 1.25 x 0.7	550
200	40	2.4~36	B, B1, B2, B3	Jap		PZUxB series			
250	40	2.4~75	B, C	Eur		BZX84J series			
200	40	2.4~15	C	Eur	dual c.a. 	BZB984 series		1.6 x 1.2 x 0.55	350
200	40	2.4~75	B, C	Eur	single 	BZX585 series		1.2 x 0.8 x 0.6	300
200	40	2.4~75	B, C	Eur	single 	BZX884 series		1.0 x 0.6 x 0.5	250
		2.4~36	B, B2	Jap		PZUxBL series			
250	180	5.6	C	Eur	single 	TDZ5V6J		1.7 x 1.25 x 0.7	500

Notes:

Jap: B selection: app. 5% V_z tolerance, B1, B2, B3 selections: app. 2% V_z tolerance in sequential intervals
























Eur: A selection: app. 1% V_z tolerance, B selection: app. 2% V_z tolerance, C selection: app. 5% V_z tolerance; the selections are in overlapping intervals

Ave: low voltage avalanche regulator diodes

dual c.a.: dual common anode

Switching diodes

General purpose switching diodes $\leq 100V$









V_R max (V)	V_F max (V)	@ I_F (mA)	I_R max (nA)	@ V_R (V)	t_{rr} max (ns)	Package	SOD27 (DO-35)	SOD68 (DO-34)	SOD80C (MiniMelf)	SOT23	SOT143B	SOD123F				
																
							Size (mm)	4.25 x 1.85 x 0.56	3.04 x 1.6 x 0.55	3.5 x 1.5 x 1.5	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.6 x 1.6 x 1.1			
							P_{tot} (mW)	500	500	500	250	250	830			
50	1	50	100	50	4					BAL74						
										BAV74						
70	1	50	1000	70	4					BAL99						
75	1	10	25	20	4			1N4531								
		50	1000	75	4						BAS28					
		100	5000	75	4				BAS32L							
90	1	50	500	80	4					BAW56						
																
																
100	1	10	25	20	4		1N4148									
		50	500	80	4							BAS16H				
											BAS16					
																
													BAV70			
																
														BAV99		
																

General purpose switching diodes > 100V

V_R max (V)	V_F max (V)	I_F (mA)	I_R max (mA)	V_R (V)	t_r max (ns)	Package	SOD27 (DO-35)	SOD80C (MiniMelf)	SOT457 (SC-74)	SOT23	SOT143B	SOD123F	SOT323 (SC-70)	SOT363 (SC-88)	SOD323 (SC-76)	SOD323F (SC-90)	SOD523 (SC-79)						
							Size (mm)	4.25 x 1.85 x 0.56	3.5 x 1.5 x 1.5	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.2 x 0.8 x 0.6					
						P_{tot} (mW)	500	300	500	250	250	830	350	300	400	550	500						
150	1	100	100	150	50		BAV20																
≥200	1	100	100	200	50		BAV21	BAV103					BAS21H			BAS321							
					50					BAS21			BAS21W										
					50								BAV23										
					50								BAV23A				BAS21AW						
					50								BAV23C										
					50								BAV23S				BAS21SW						
					50																		
					50								BAS21VD										
					300	1.1	100	150	250	50												BAS21J	BAS521
										50						BAS101							
50												BAS101S											
50														BAW101									
50																	BAW101S						





Ultrafast recovery power diodes

types in **bold** represent new products

V_{RRM} (V)	I_{FAV} (A)	V_F (typ) @ 150C (V)	@ I_F (A)	t_{rr} (typ) @ 25C (ns)	SOD59 (TO220AC)	SOD113 (2-pin SOT186A)	SOT78 (TO220AB)	SOT186A (isolated TO220AB)	SOT223	SOT226 (I ² PAK)	SOT404 (D ² PAK)	SOT428 (DPAK)
												
100	8	0.8	8	20	BYW29E-100							
	2 x 10	0.72	8	20			BYV32E-100					
150	2 x 0.75	0.5	0.5	10					BYV40E-150			
	8	0.8	8	20	BYW29E-150							
	2 x 10	0.72	8	20			BYV32E-150					
200	2 x 15	0.78	15	20			BYV42E-150					
	8	0.8	8	20	BYW29E-200	BYW29EX-200						BYW29ED-200
	2 x 5	0.8	5	15			BYQ28E-200	BYQ28X-200				BYQ28ED-200
	14	0.83	14	20	BYV79E-200							
	2 x 8	0.84	8	20			BYQ30E-200					
	2 x 10	0.72	8	20			BYV32E-200			BYV32G-200	BYV32EB-200	
300	2 x 15	0.78	15	20			BYV42E-200			BYV42G-200	BYV42EB-200	
	2 x 5	0.95	5	50			BYT28-300					
400	9	0.9	8	50	BYV29-400							
	2 x 10	0.87	10	50			BYV34-400					
500	9	0.9	8	50	BYV29-500	BYV29X-500					BYV29B-500	
	2 x 5	0.95	5	50			BYT28-500					
	15	0.9	15	50	BYT79-500							
	2 x 10	0.87	10	50			BYV34-500					
600	2 x 15	0.95	15	50			BYV44-500					
	5	0.97	5	50		BYV25X-600				BYV25G-600		BYV25D-600
	8	1.07	8	60	BYR29-600	BYR29X-600						
	9	0.97	8	50	BYV29-600	BYV29X-600				BYV29G-600	BYV29B-600	
	15	1	15	50	BYT79-600	BYT79X-600						
	2 x 10	0.92	10	50			BYV34-600	BYV34X-600		BYV34G-600		
	5	1.1	5	17.5		BYV25FX-600	BYV25F-600				BYV25FB-600	BYV25FD-600
	9	1.25	8	17.5		BYV29FX-600	BYV29F-600				BYV29FB-600	BYV29FD-600
800	2 x 10	1.3	10	20			BYV410-600	BYV410X-600				
	8	1.07	8	60	BYR29-800	BYR29X-800						



Hyperfast power diodes

types in **bold** represent new products

V_{RRM} (V)	I_{FAV} (A)	V_F (typ) @ 150C (V)	@ I_F (A)	t_{rr} (typ) @ 25C (ns)	SOD59 (TO220AC)	SOD113 (2-pin SOT186A)	SOT78 (TO220AB)	SOT404 (D ² PAK)
								
600	5	1.4	5	19	BYC5-600	BYC5X-600		BYC5B-600
	8	1.4	8	19	BYC8-600	BYC8X-600		BYC8B-600
	8	1.4	8	19	BYC8D-600	BYC8DX-600		
	8	2	8	12.5		BYC58X-600		
	10	1.4	10	19	BYC10-600	BYC10X-600		BYC10B-600
	2 x 5	1.4	5	19			BYC10-600CT	
	15	1.4	15	19	BYC15-600	BYC15X-600		
	20	1.4	20	19	BYC20-600	BYC20X-600		

Standard ESD protection devices

types in **bold** represent new products
















Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	$P_{PP}^{(1)}$ max (W)	ESD rating ⁽²⁾ max (kV)	I_R max (μA) @ V_{RWM}	Configuration	Type	Package	Size (mm)			
Unidirectional	Bidirectional													
1	0	3.3	207	300	150	30	2		PESD3V3S1UL	SOD882	1.0 x 0.6 x 0.5			
		5	152	200	150	30	1		PESD5V0S1UL					
		12	38	75	150	30	0.05		PESD12VS1UL					
		15	32	70	150	30	0.05		PESD15VS1UL					
		24	23	50	150	23	0.05		PESD24VS1UL					
		5	152	200	150	30	1		PESD5V0S1ULD					
		12	38	75	150	30	0.05		PESD12VS1ULD					
		15	32	70	150	30	0.05		PESD15VS1ULD					
		24	23	50	150	23	0.05		PESD24VS1ULD					
		3.3	207	300	330	30	2		PESD3V3S1UB	SOD523 (SC-79)	1.2 x 0.8 x 0.6			
		5	152	200	260	30	1		PESD5V0S1UB					
		12	38	75	180	30	0.05		PESD12VS1UB					
		15	32	70	160	30	0.05		PESD15VS1UB					
		24	23	50	160	23	0.05		PESD24VS1UB					
		5	480	530	890	30	4		PESD5V0S1UA	SOD323 (SC-76)	1.7 x 1.25 x 0.95			
		12	160	180	600	30	0.1		PESD12VS1UA					
		24	23	50	160	23	0.05		PESD24VS1UA					
		5	480	530	890	30	4		PESD5V0S1UJ	SOD323F (SC-90)	1.7 x 1.25 x 0.7			
		12	160	180	600	30	0.1		PESD12VS1UJ					
		2.5	229	300	260	30	6		PESD5Z2.5	SOD523 (SC-79)	1.2 x 0.8 x 0.6			
		3.3	172	200	260	30	0.05		PESD5Z3.3					
		5	89	150	180	30	0.05		PESD5Z5.0					
		6	78	150	180	30	0.01		PESD5Z6.0					
		7	69	150	180	30	0.01		PESD5Z7.0					
		12	35	75	200	30	0.01		PESD5Z12					
		5	68	75	150	30	1		PESD9X5.0L			SOD882	1.0 x 0.6 x 0.5	
		7	62	70	150	30	1		PESD9X7.0L					
		0	1	5	35	45	130		30	0.1		PESD5V0S1BL	SOD882D	1.0 x 0.6 x 0.37
				5	35	45	130		30	0.1		PESD5V0S1BLD		
				5	35	45	130		30	0.1		PESD5V0S1BB	SOD523 (SC-79)	1.2 x 0.8 x 0.6
5	35			45	130	30	0.1	PESD5V0S1BA	SOD323 (SC-76)	1.7 x 1.25 x 0.95				
5.5	35			45	100	30	0.1	PESD5V0S1BSF	SOD962	0.6 x 0.3 x 0.3				

⁽¹⁾ 8/20 μs surge pulse acc. to IEC 61000-4-5

⁽²⁾ acc. to IEC 61000-4-2 (contact discharge)

Low capacitance ESD protection devices

types in **bold** represent new products
















Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	$P_{PP}^{(1)}$ max (W)	ESD rating ^[2] max (kV)	I_R max (μA) @ V_{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
1	0	3.3	34	40	45	30	0.3		PESD3V3L1UL	SOD882	1.0 x 0.6 x 0.5
		5	25	30	42	26	0.1		PESD5V0L1UL		
		5	25	30	42	26	0.1		PESD5V0L1ULD	SOD882D 	1.0 x 0.6 x 0.37
		3.3	34	40	45	30	0.3		PESD3V3L1UB	SOD523 (SC-79) 	1.2 x 0.8 x 0.6
		5	25	30	42	26	0.1		PESD5V0L1UB		
		3.3	34	40	45	30	0.3		PESD3V3L1UA	SOD323 (SC-76) 	1.7 x 1.25 x 0.95
		5	25	30	42	26	0.1		PESD5V0L1UA		
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UL	SOD882 	1.0 x 0.6 x 0.5
		5	2	2.6	-	9	0.1		PESD5V0U1UL		
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UB	SOD523 (SC-79) 	1.2 x 0.8 x 0.6
		5	2	2.6	-	9	0.1		PESD5V0U1UB		
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UA	SOD323 (SC-76) 	1.7 x 1.25 x 0.95
		5	2	2.6	-	9	0.1		PESD5V0U1UA		
		0	1	3.3	101	-	500		30	2	
5	75			-	500	30	1	PESD5V0L1BA			
12	19			-	200	30	0.05	PESD12VL1BA			
15	16			-	200	30	0.05	PESD15VL1BA			
24	11			-	200	23	0.05	PESD24VL1BA			
5.5	12			15.4	35	30	0.1	PESD5V0L1BSF	SOD962 	0.6 x 0.3 x 0.3	
5	11			13	45	30	0.01	PESD5V0V1BL	SOD882 	1.0 x 0.6 x 0.5	
5	11			13	45	30	0.01	PESD5V0V1BLD	SOD882D 	1.0 x 0.6 x 0.37	
5	11			13	45	30	0.01	PESD5V0V1BB	SOD523 (SC-79) 	1.2 x 0.8 x 0.6	
5	11			13	45	30	0.01	PESD5V0V1BA	SOD323 (SC-76) 	1.7 x 1.25 x 0.95	
5.5	3.5			4.5	8	15	0.1	PESD5V0V1BSF	SOD962 	0.6 x 0.3 x 0.3	
15	8			10	-	15	0.1	IP4302CX2/A	CSP2	0.7 x 0.52 x 0.40	

^[1] 8/20 μs surge pulse acc. to IEC 61000-4-5

^[2] acc. to IEC 61000-4-2 (contact discharge)

Low capacitance ESD protection devices

types in **bold** represent new products

Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	$P_{PP}^{(1)}$ max (W)	ESD rating ^[2] max (kV)	I_r max (μ A) @ V_{RWM}	Configuration	Type	Package	Size (mm)				
Unidirectional	Bidirectional														
3	0	5.5	3	4	-	15	0.1	-	IP4059CX5/LF	CSP5, staggered compressed	1.34 x 0.96 x 0.65				
4	3	3.3	22	28	30	20	0.3		PESD3V3L4UF	SOT886 (XSON6)		1.45 x 1.0 x 0.5			
		5	16	19	30	20	0.025		PESD5V0L4UF						
		3.3	22	28	30	20	0.3		PESD3V3L4UW	SOT665		1.6 x 1.2 x 0.55			
		5	16	19	30	20	0.025		PESD5V0L4UW						
		3.3	22	28	30	20	0.3		PESD3V3L4UG	SOT353 (SC-88A)		2.0 x 1.25 x 0.95			
		5	16	19	30	20	0.025		PESD5V0L4UG						
		3.3	13	17	25	10	1		PESD3V3V4UK	SOT891 (XSON6)		1.0 x 1.0 x 0.5			
		5	12	15	25	15	0.3		PESD5V0V4UK						
		9	6.5	10	28	8	0.1		PESD9V0V4UK						
		4	3	3.3	15	18	16	12	0.3		PESD3V3V4UF	SOT886 (XSON6)		1.45 x 1.0 x 0.5	
				5	12	15	16	12	0.025		PESD5V0V4UF				
				3.3	15	18	16	12	0.3		PESD3V3V4UW	SOT665		1.6 x 1.2 x 0.55	
				5	12	15	16	12	0.025		PESD5V0V4UW				
				3.3	15	18	16	12	0.3		PESD3V3V4UG	SOT353 (SC-88A)		2.0 x 1.25 x 0.95	
				5	12	15	16	12	0.025		PESD5V0V4UG				
						5.5	18	20	-	15	0.1	-	IP4142CX5/LF	5 ball CSP, staggered compressed	1.28 x 0.91 x 0.65
				0	4	5.5	18	20	-	15	0.1		IP4343CX5/LF	5 ball CSP	1.06 x 0.76 x 0.61
		5.5	18			20	-	15	0.1	IP4043CX5/LF	5 ball CSP		1.12 x 1.12 x 0.65		














^[1] 8/20 μ s surge pulse acc. to IEC 61000-4-5

^[2] acc. to IEC 61000-4-2 (contact discharge)

ESD protection for very high-speed interfaces (< 2 pF)

ESD protection for very high-speed interfaces (< 2 pF)

types in **bold** represent new products

Number of protected lines		V _{RWM} (V)	C _{lim} typ (pF)	C _{lim} max (pF)	ESD rating ⁽¹⁾ max (kV)	Configuration	Type	Package	Size (mm)	
Unidirectional	Bidirectional									
1	0	5	1.55	1.75	15		PESD5V0X1ULD	SOD882D	1.0 x 0.6 x 0.37	
		5	0.95	1.15	8		PESD5V0X1UALD			
		5	0.95	1.15	8		PESD5V0X1UB	SOD523 (SC-79)	1.2 x 0.8 x 0.6	
		5	1.55	1.75	15		PESD5V0X1UAB			
		16	0.83	0.98	8	PESD16VX1UL	SOD882	1.0 x 0.6 x 0.5		
		5.5	1	1.5	8		PRTR5V0U1T	SOT23	2.9 x 1.3 x 1.0	
		80	0.6	0.75	30		NUP1301			
		80	0.6	0.75	30		NUP1301U	SOT323	2.0 x 1.25 x 0.95	
0	1	5.5	0.4	0.55	10		PESD5V0F1BL	SOD882	1.0 x 0.6 x 0.5	
		16	0.5	0.65	8		PESD16VF1BL			
		3.3	1.3	1.6	9		PESD3V3X1BL	SOD962		
		5	0.9	1.3	9		PESD5V0X1BL			
		5.5	0.25	0.3	28		PESD5V0F1BSF		0.6 x 0.3 x 0.3	
2	1	5	0.9	1.3	9		PESD5V0X1BQ	SOT663	1.6 x 1.2 x 0.55	
		5	0.9	1.3	9		PESD5V0X1BT	SOT23	2.9 x 1.3 x 1.0	
	0	1	5.5	1	1.5	8		PRTR5V0U2X	SOT143B	2.9 x 1.3 x 1.0
			5.5	1.8	-	12		PRTR5V0U2AX		
		5.5	1	1.5	8	PRTR5V0U2K	SOT891 (XSON6)	1.0 x 1.0 x 0.5		
		5.5	1	1.5	8		PRTR5V0U2D	SOT457 (SC-74)	2.9 x 1.5 x 1.0	
		5.5	1	1.5	8		PRTR5V0U2F	SOT886 (XSON6)	1.45 x 1.0 x 0.5	
		5.5	1	1.5	8					

⁽¹⁾ acc. to IEC 61000-4-2 (contact discharge)

ESD protection for very high-speed interfaces (< 2 pF)

ESD protection for very high-speed interfaces (< 2 pF)

types in **bold** represent new products

Number of protected lines		V_{RWM} (V)	C_{limb} typ (pF)	C_{limb} max (pF)	ESD rating ⁽¹⁾ max (kV)	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional								
4	0	5.5	1	-	8		PRTR5V0U4D	SOT457 (SC-74) 	2.9 x 1.5 x 1.0
		5.5	1	-	8		PRTR5V0U4Y	SOT363 (SC-88) 	2.0 x 1.25 x 0.95
		5.5	0.8	-	12		IP4285CZ9-TBB	SOT1178 (XSON9) 	1.0 x 2.1 x 0.5
		5.5	0.7	-	8		IP4280CZ10	SOT552 (TSSOP10) 	3.0 x 3.0 x 1.1
		5.5	0.6	-	8		IP4283CZ10-TBA	SOT1165 (XSON10) 	1.0 x 2.5 x 0.5
		5.5	0.6	-	8		IP4283CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5
		5.5	0.6	-	8		IP4283CZ10-TT	SOT552 (TSSOP10) 	3.0 x 3.0 x 1.1
		5.5	0.5	-	8		IP4284CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5
		5.5	0.5	-	8		IP4284CZ10-TT	SOT552 (TSSOP10) 	3.0 x 3.0 x 1.1
		5.5	0.6	-	8		IP4286CZ6-TBF	SOT886 (XSON6) 	1.45 x 1.0 x 0.5
		5.5	0.6	-	8		IP4286CZ6-TTY	SOT363 (SC-88) 	2.0 x 1.25 x 0.95

⁽¹⁾ acc. to IEC 61000-4-2 (contact discharge)

Audio interfaces










types in **bold** represent new products

Baseband interface	Number of protected lines	Line small-signal equivalents		Digital interface clock speed (MHz)	Remark	Type	Package	Size (mm)
		R_{line}	C_{line} (pF)					
Audio	2	0.9 Ω	290	-	Low-ohmic speaker (< ~8 Ω)	IP4047CX6/LF	6 ball CSP	1.56 x 1.01 x 0.65
		10 Ω	200	-	Low-ohmic speaker (> ~8 Ω)	IP4048CX5/LF	5 ball CSP	0.91 x 1.28 x 0.65
		68 Ω	110	-	Single-ended or differential microphone	IP4049CX5/LF	6 ball CSP	1.56 x 1.03 x 0.65
		470 Ω	35	-	Single-ended or differential microphone	IP4055CX6/LF		1.16 x 0.76 x 0.65
		470 Ω	20	-	Single-ended or differential microphone	IP4355CX6/LF	8 ball CSP	1.67 x 1.67 x 0.65
		50 Ω / 2.2 k Ω	2000	-	Single-ended to quasi-differential microphone channel with integrated biasing network	IP5002CX8/LF	6 ball CSP	1.60 x 1.15 x 0.65
		0.25 Ω , 3 nH	-	-	Inductive, low-ohmic differential channel LC filter	IP3047CX6	5 ball CSP	1.51 x 1.15 x 0.65
		0.25 Ω , 3 nH	-	-	Inductive, low-ohmic differential channel LC filter	IP3048CX5	20 ball CSP	1.91 x 2.52 x 0.65
	6	40 Ω / 1450 Ω / 10 Ω	50 / 20 / 200	-	Fully integrated audio interface protection for differential microphone and differential speaker, including EMI filtering and pull up resistors	IP4027CX20/LF	20 ball CSP	1.91 x 2.52 x 0.65

ESD protection acc. to IEC 61000-4-2 (level 4)

Video interfaces



types in **bold** represent new products

Baseband interface	Number of protected lines	C_{line} (pF)	Remark	Type	Package	Size (mm)
Display port	4	0.6	ESD protection for ultra high-speed interfaces	IP4283CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5
		0.6	ESD protection for ultra high-speed interfaces	IP4283CZ10-TT	SOT552 (TSSOP10) 	3.0 x 3.0 x 1.1
		0.5	ESD protection for ultra high-speed interfaces	IP4284CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5
		0.5	ESD protection for ultra high-speed interfaces	IP4284CZ10-TT	SOT552 (TSSOP10) 	3.0 x 3.0 x 1.1
		0.5	ESD protection for ultra high-speed interfaces	IP4292CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5
		0.8	ESD protection for ultra high-speed interfaces	IP4285CZ9-TBB	SOT1178 (XSON9) 	1.0 x 2.1 x 0.5
		0.6	ESD protection for ultra high-speed interfaces	IP4286CZ6-TBF	SOT886 (XSON6) 	1.45 x 1.0 x 0.5
			ESD protection for ultra high-speed interfaces	IP4286CZ6-TTY	SOT363 (SC-88) 	2.0 x 1.25 x 0.95
	11	0.7	ESD protection for display port	IP4790CZ38	SOT510 (TSSOP38) 	9.7 x 4.4 x 1.1

ESD protection acc. to IEC 61000-4-2 (level 4)

Video interfaces



 types in **bold** represent new products

Baseband interface	Number of protected lines	Buffer	Level shifter	C _{line} (pF)	Resistor (Ω)	Remark	Type	Package	Size (mm)
HDMI	4	-	-	0.5	-	ESD protection for ultra high-speed interfaces	IP4284CZ10-TT	SOT552 (TSSOP10) 	3.0 x 3.0 x 1.1
		-	-	0.5	-	ESD protection for ultra high-speed interfaces	IP4292CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5
	5	-	-	10	1.75 k, 100 k	HDMI, DDC, CEC, hot plug ESD protection and biasing	IP4310CX8/P	8 ball CSP 	1.16 x 1.16 x 0.61
		yes	yes	-	internal	Fully integrated solution for HDMI low-speed signals, buffer and level shifter for DDC, CEC, HP	IP4791CZ12	SOT1156 	2.5 x 2.1 x 0.5
	8	-	-	1.3	-	HDMI, TMDS line ESD protection	IP4309CX9	9 ball CSP 	1.16 x 1.16 x 0.61
	12	-	yes	0.7	-	ESD protection and level shifting for a complete HDMI port	IP4776CZ38		9.7 x 4.4 x 1.1
		yes	yes	0.7	-	ESD protection, DDC buffering, noise reduction and hot plug application for a complete HDMI source port	IP4777CZ38		
		yes	yes	0.7	-	ESD protection, DDC buffering, noise reduction and hot plug application for a complete HDMI sink port	IP4778CZ38		
	13	yes	yes	100 Ω differential impedance	internal	Fully integrated HDMI solution with current limiter, buffer and level shifter for DDC, CEC, HP	IP4786CZ32	SOT617 	5.0 x 5.0 x 1.0
	LVDS	2	-	-	30	10	EMI filter with ESD protection for MIPI or MDDI	IP3348CX5	CSP5, staggered compressed
4		-	-	30	10	EMI filter with ESD protection for MIPI or MDDI	IP3348CX10	CSP10, staggered compressed	1.56 x 1.06 x 0.61
6		-	-	30	10	EMI filter with ESD protection for MIPI or MDDI	IP3348CX15	CSP15, staggered compressed	2.36 x 1.06 x 0.61
8		-	-	30	10	EMI filter with ESD protection for MIPI or MDDI	IP3348CX20	CSP20, staggered compressed	3.16 x 1.06 x 0.61

ESD protection acc. to IEC 61000-4-2 (level 4)

Multichannel EMI filters, ESD protection for LCD and camera



types in **bold** represent new products

Baseband interface	Number of protected lines	Line small-signal equivalents			Digital interface clock speed (MHz)	Insertion Loss S ₂₁ ~ -3 dB (MHz)	Type	Package	Size (mm)
		R _{line} (Ω)	C _{line} (pF)	L _{line} (nH)					
LCD display, camera, keypad	1	75	36	-	~50	155	IP4307CX4/LF	4 ball CSP	0.76 x 0.76 x 0.61
		20	40	-	~50	153	PEMI1QFN/CT		1.0 x 0.6 x 0.5
		20	36	-	~55	170	PEMI1QFN/CR		
		20	32	-	~60	185	PEMI1QFN/CP		
		20	28	-	~70	218	PEMI1QFN/CM		
		20	23	-	~90	264	PEMI1QFN/CK		
		20	19	-	~105	317	PEMI1QFN/CG		
		20	15	-	~130	397	PEMI1QFN/CE		
		45	40	-	~50	145	PEMI1QFN/HT		
		45	36	-	~55	161	PEMI1QFN/HR		
		45	32	-	~60	175	PEMI1QFN/HP		
		45	28	-	~70	206	PEMI1QFN/HM		
		45	23	-	~80	249	PEMI1QFN/HK		
		45	19	-	~100	300	PEMI1QFN/HG		
		45	15	-	~125	376	PEMI1QFN/HE		
		65	40	-	~45	139	PEMI1QFN/LT		
		65	36	-	~50	155	PEMI1QFN/LR		
		65	32	-	~55	168	PEMI1QFN/LP		
		65	28	-	~65	197	PEMI1QFN/LM		
		65	23	-	~80	239	PEMI1QFN/LK		
		65	19	-	~95	288	PEMI1QFN/LG		
		65	15	-	~120	361	PEMI1QFN/LE		
		100	40	-	~45	131	PEMI1QFN/RT		
		100	36	-	~50	145	PEMI1QFN/RR		
		100	32	-	~55	159	PEMI1QFN/RP		
		100	28	-	~60	187	PEMI1QFN/RM		
		100	30	-	~65	200	IP4256CZ3-M		
		100	23	-	~75	227	PEMI1QFN/RK		
		100	19	-	~90	272	PEMI1QFN/RG		
		100	15	-	~115	343	PEMI1QFN/RE		
	200	40	-	~40	119	PEMI1QFN/WT			
	200	36	-	~45	132	PEMI1QFN/WR			
	200	32	-	~50	143	PEMI1QFN/WP			
	200	28	-	~55	169	PEMI1QFN/WM			
	200	23	-	~70	205	PEMI1QFN/WK			
	200	19	-	~80	247	PEMI1QFN/WG			
200	15	-	~105	311	PEMI1QFN/WE				
2	10	35	15	~115	350	IP3348CX5	5 ball CSP	0.76 x 1.06 x 0.61	
	18	65	40	~60	175	IP3088CX5		0.96 x 1.28 x 0.65	
	100	45	35	~50	150	IP3053CX5			1.6 x 1.2 x 0.5
	20	40	-	~50	153	PEMI2STD/CT			
	20	36	-	~55	170	PEMI2STD/CR			
	20	32	-	~60	185	PEMI2STD/CP			
20	28	-	~70	218	PEMI2STD/CM				

ESD protection acc. to IEC 61000-4-2 (level 4)

Multichannel EMI filters, ESD protection for LCD and camera




types in **bold** represent new products

Baseband interface	Number of protected lines	Line small-signal equivalents			Digital interface clock speed (MHz)	Insertion Loss S21 ~ -3 dB (MHz)	Type	Package	Size (mm)
		R _{line} (Ω)	C _{line} (pF)	L _{line} (nH)					
LCD display, camera, keypad	2	45	23	-	~80	249	PEMI2QFN/HK	SOT886 (XSON6) 	1.45 x 1.0 x 0.5
		45	19	-	~100	300	PEMI2QFN/HG		
		45	15	-	~125	376	PEMI2QFN/HE		
		65	40	-	~45	139	PEMI2QFN/LT		
		65	36	-	~50	155	PEMI2QFN/LR		
		65	32	-	~55	168	PEMI2QFN/LP		
		65	28	-	~65	197	PEMI2QFN/LM		
		65	23	-	~80	239	PEMI2QFN/LK		
		65	19	-	~95	288	PEMI2QFN/LG		
		65	15	-	~120	361	PEMI2QFN/LE		
		100	40	-	~45	131	PEMI2QFN/RT		
		100	36	-	~50	145	PEMI2QFN/RR		
		100	32	-	~55	159	PEMI2QFN/RP		
		100	30	-	~65	200	IP4256CZ6-F		
		100	28	-	~60	187	PEMI2QFN/RM		
		100	23	-	~75	227	PEMI2QFN/RK		
		100	19	-	~90	272	PEMI2QFN/RG		
		100	15	-	~115	343	PEMI2QFN/RE		
		200	40	-	~40	119	PEMI2QFN/WT		
		200	36	-	~45	132	PEMI2QFN/WR		
	200	32	-	~50	143	PEMI2QFN/WP			
	200	28	-	~55	169	PEMI2QFN/WM			
	200	23	-	~70	205	PEMI2QFN/WK			
	200	19	-	~80	247	PEMI2QFN/WG			
	200	15	-	~105	311	PEMI2QFN/WE			
	10	35	15	~115	350	IP3348CX10	10 ball CSP	1.56 x 1.06 x 0.61	
	18	65	40	~60	175	IP3088CX10		1.96 x 1.28 x 0.65	
	100	54	-	~30	98	PEMI4CSP/RW		1.56 x 1.06 x 0.61	
	100	45	35	~20	150	IP3053CX10		1.96 x 1.28 x 0.65	
	100	41	-	~40	125	PEMI4CSP/RT		1.56 x 1.06 x 0.61	
	20	40	-	~50	153	PEMI4QFN/CT	SOT1157 (8 pin QFN) 	1.7 x 1.2 x 0.5	
	20	36	-	~55	170	PEMI4QFN/CR			
	20	32	-	~60	185	PEMI4QFN/CP			
20	28	-	~70	218	PEMI4QFN/CM				
20	23	-	~90	264	PEMI4QFN/CK				
20	19	-	~105	317	PEMI4QFN/CG				
20	15	-	~130	397	PEMI4QFN/CE				
45	40	-	~50	145	PEMI4QFN/HT				
45	36	-	~55	161	PEMI4QFN/HR				
45	32	-	~60	175	PEMI4QFN/HP				
45	28	-	~70	206	PEMI4QFN/HM				
45	23	-	~80	249	PEMI4QFN/HK				
45	19	-	~100	300	PEMI4QFN/HG				

ESD protection acc. to IEC 61000-4-2 (level 4)

Multichannel EMI filters, ESD protection for LCD and camera





types in **bold** represent new products

Baseband interface	Number of protected lines	Line small-signal equivalents			Digital interface clock speed (MHz)	Insertion Loss S21 ~ -3 dB (MHz)	Type	Package	Size (mm)
		R _{line} (Ω)	C _{line} (pF)	L _{line} (nH)					
LCD display, camera, keypad	6	45	36	-	~55	161	PEMI6QFN/HR	SOT1158 (12 pin QFN) 	2.5 x 1.2 x 0.5
		45	32	-	~60	175	PEMI6QFN/HP		
		45	28	-	~70	206	PEMI6QFN/HM		
		45	23	-	~80	249	PEMI6QFN/HK		
		45	19	-	~100	300	PEMI6QFN/HG		
		45	15	-	~125	376	PEMI6QFN/HE		
		65	40	-	~45	139	PEMI6QFN/LT		
		65	36	-	~50	155	PEMI6QFN/LR		
		65	32	-	~55	168	PEMI6QFN/LP		
		65	28	-	~65	197	PEMI6QFN/LM		
		65	23	-	~80	239	PEMI6QFN/LK		
		65	19	-	~95	288	PEMI6QFN/LG		
		65	15	-	~120	361	PEMI6QFN/LE		
		100	40	-	~45	131	PEMI6QFN/RT		
		100	36	-	~50	145	PEMI6QFN/RR		
		100	32	-	~55	159	PEMI6QFN/RP		
		100	28	-	~60	187	PEMI6QFN/RM		
		100	23	-	~75	227	PEMI6QFN/RK		
		100	19	-	~90	272	PEMI6QFN/RG		
		100	15	-	~115	343	PEMI6QFN/RE		
		200	40	-	~40	119	PEMI6QFN/WT		
		200	36	-	~45	132	PEMI6QFN WR		
		200	32	-	~50	143	PEMI6QFN/WP		
		200	28	-	~55	169	PEMI6QFN/WM		
	200	23	-	~70	205	PEMI6QFN/WK			
	200	19	-	~80	247	PEMI6QFN/WG			
	200	15	-	~105	311	PEMI6QFN/WE			
	15	50	18	~50	145	IP3254CZ12-6-TTL	SOT1167 (12 pin QFN) 	2.5 x 1.35 x 0.5	
	15	43	12	~60	175	IP3253CZ12-6-TTL			
	40	18	-	~100	300	IP4252CZ12-6-TTL			
	100	45	-	~40	130	IP4254CZ12-6-TTL			
	100	15	-	~110	330	IP4251CZ12-6-TTL			
	200	45	-	~35	110	IP4253CZ12-6-TTL			
	7	70	25	-	~75	220	IP4337CX18/LF	18 ball CSP	1.96 x 1.61 x 0.61
	125	25	60	~60	180	IP3337CX18/LF	2.06 x 1.66 x 0.61		
	8	10	35	15	~115	350	IP3348CX20	20 ball CSP	3.16 x 1.06 x 0.61
18		65	40	~60	175	IP3088CX20	3.96 x 1.28 x 0.65		
100		54	-	~30	98	PEMI8CSP/RW	3.16 x 1.06 x 0.61		
100		50	-	~40	120	IP4088CX20/LF	3.91 x 1.28 x 0.65		
100		45	35	~20	150	IP3053CX20	3.96 x 1.28 x 0.65		
100		41	-	~40	125	PEMI8CSP/RT	3.16 x 1.06 x 0.61		
20		40	-	~50	153	PEMI8QFN/CT	SOT1159 (16 pin QFN) 	3.3 x 1.2 x 0.5	
20		36	-	~55	170	PEMI8QFN/CR			
20		32	-	~60	185	PEMI8QFN/CP			
20		28	-	~70	218	PEMI8QFN/CM			
20	23	-	~90	264	PEMI8QFN/CK				
20	19	-	~105	317	PEMI8QFN/CG				
20	15	-	~130	397	PEMI8QFN/CE				

ESD protection acc. to IEC 61000-4-2 (level 4)

SD-, SIM-card and MMC

types in **bold** represent new products


Baseband interface	Number of protected lines	Line small-signal equivalents		Digital interface clock speed (MHz)	Remark	Type	Package	Size (mm)	
		R_{line}	C_{line} (pF)						
SIM card	3 + 2	47 Ω / 100 Ω	10	~20	Integrated low capacitance SIM-card passive filter array & USB ESD protection	IP4365CX11	11 ball CSP	1.16 x 1.56 x 0.61	
	3	47 Ω / 100 Ω	40	~12	Integrated SIM-card EMI filter and ESD protection	IP4044CX8/LF	8 ball CSP	1.46 x 1.49 x 0.65	
		47 Ω / 100 Ω	20	~20	Integrated SIM-card EMI filter and ESD protection	IP4064CX8/LF/P		1.41 x 1.41 x 0.65	
		47 Ω / 100 Ω	20	~20	Smaller size, integrated SIM-card EMI filter and ESD protection	IP4364CX8/LF/P		1.16 x 1.16 x 0.61	
		47 Ω / 100 Ω	10	~20	Smaller size, low capacitance integrated SIM-card EMI filter and ESD protection	IP4366CX8/P			
		47 Ω / 100 Ω	40	~12	Integrated SIM-card EMI filter and ESD protection	IP4264CZ8-40-TTL	SOT1166 (8 pin QFN)	1.7 x 1.35 x 0.5	
		47 Ω / 100 Ω	20	~20	Integrated SIM-card EMI filter and ESD protection	IP4264CZ8-20-TTL			
		47 Ω / 100 Ω	10	~20	Integrated SIM-card EMI filter and ESD protection	IP4264CZ8-10-TTL			
		-	-	1	~240	Quad channel low capacitance ESD protection	IP4221CZ6-S	SOT886 (XSON6)	
SD-card / MMC	4	47 Ω / 13 k Ω / 56 k Ω	25	~30	MMC ESD protection, pull-up resistors	IP4051CX11/LF	11 ball CSP	1.44 x 1.96 x 0.65	
		50 Ω / 75 k Ω / 7 k Ω	18	~50	High-speed MMC ESD protection, pull-up resistors	IP4060CX16/LF	16 ball CSP	1.96 x 1.97 x 0.65	
	6	40 Ω	12	>52	(Mini) SD card/trans flash ESD protection, EMI filter	IP4252CZ12-6-TTL	SOT1167 (12 pin QFN)		2.5 x 1.35 x 0.5
	6 + 2	40 Ω	12	>52	(Mini) SD card/trans flash ESD protection, EMI filter	IP4252CZ16-8-TTL	SOT1168 (16 pin QFN)		3.3 x 1.35 x 0.5
	7	40 Ω / 50 k Ω / 25 k Ω	18	~20	(Mini) SD/trans flash card ESD protection, EMI filter, pull-up resistors	IP4052CX20/LF	20 ball CSP	2.54 x 1.96 x 0.65	
		-	5	~24	Memory stick PRO ESD protection	IP4067CX9/LF	9 ball CSP	1.46 x 1.52 x 0.65	
	6 (+3)	15 Ω / 50 k Ω / 15 k Ω	8	>52	Very low capacitance, low channel resistance (mini) SD card/trans flash ESD protection EMI filter, pull-up resistor	IP4350CX24/LF	24 ball CSP	1.95 x 2.11 x 0.61	
		40 Ω / 50 k Ω / 15 k Ω	20	>52	(Mini) SD card/trans flash ESD protection, EMI filter, pull-up resistor	IP4352CX24/LF		2.02 x 2.01 x 0.61	
		-	-	>52	(Mini) SD/SDIO memory card level shifter, can be combined with IP4352CX24/LF	IP4852CX25/LF	25 ball CSP	2.01 x 2.01 x 0.61	
		40 Ω / 50 k Ω / 15 k Ω	-	>52	(Mini) SD/SDIO memory card level shifter, and voltage regular, incl. ESD and EMI filter	IP4853CX24/P	24 ball CSP		

ESD protection acc. to IEC 61000-4-2 (level 4)

Please find more ESD protection diodes for ultra high-speed interfaces on pages 28 - 31

Battery and charger protection







types in **bold** represent new products

Baseband interface	Number of protected lines	C_{line} (pF)	Diode voltage	Remark	Type	Package	Size (mm)	
Battery & charger protection	1	180	Breakdown 16 V	Power diode	IP4085CX4	4 ball CSP	0.91 x 0.91 x 0.65	
		450	Breakdown 7 V	Power diode	IP4385CX4			
		160	Breakdown 16 V	Power diode	IP4386CX4			
		290	Breakdown 10 V	Power diode	IP4387CX4			
		160	$V_{RWM} = 12$ V	Power diode with 2 A integrated fuse	IP4389CX4		0.76 x 0.76 x 0.61	
		160	$V_{RWM} = 12$ V	Power diode	PESD12VS1UJ	SOD323F (SC-90)		1.7 x 1.25 x 0.7
		160	$V_{RWM} = 12$ V	Power diode	PESD12VS1UA	SOD323 (SC-76)		1.7 x 1.25 x 0.95
		480	$V_{RWM} = 5$ V	Power diode	PESD5V0S1UJ	SOD323F (SC-90)		1.7 x 1.25 x 0.7
		480	$V_{RWM} = 5$ V	Power diode	PESD5V0S1UA	SOD323 (SC-76)		1.7 x 1.25 x 0.95

ESD protection acc. to IEC 61000-4-2 (level 4)

USB, SATA, LAN

types in **bold** represent new products

Baseband interface	Number of protected lines	R_{line}	C_{line} (pF)	Remark	Type	Package	Size (mm)
USB2.0 (Plastic package)	2	-	1	ESD protection for up to 2 ultra high-speed datalines	PRTR5V0U2K	SOT891 (XSON6) 	1.0 x 1.0 x 0.5
		-	1	ESD protection for up to 2 ultra high-speed datalines	PRTR5V0U2D	SOT457 (SC-74) 	2.9 x 1.5 x 1.0
		-	1	ESD protection for up to 2 ultra high-speed datalines	PRTR5V0U2F	SOT886 (XSON6) 	1.45 x 1.0 x 0.5
	3 + 1	-	0.8	USB protection for USB OTG with 5.5 V Vbat protection	PUSBM5V5X4-TL	SOT1189 (HXSON6) 	1.6 x 1.6 x 0.5
		-	0.8	USB protection for USB OTG with 12 V Vbat protection	PUSBM12VX4-TL		
		-	0.8	USB protection for USB OTG with 15 V Vbat protection	PUSBM15VX4-TL		
		-	0.8	USB protection for USB OTG with 27 V Vbat protection	PUSBM27VX4-TL		
	4	-	1	Dual ESD protection for USB2.0 high-speed, SD-card, SIM card	IP4220CZ6	SOT457 (SC-74) 	2.9 x 1.5 x 1.0
		-	1	Dual ESD protection for USB2.0 high-speed, SD-card, SIM card	PRTR5V0U4D		
		-	1	Dual ESP protection for USB2.0 high-speed, SD-card, SIM card	PRTR5V0U4Y	SOT363 (SC-88) 	2.0 x 1.25 x 0.95
		-	1	ESD protection for USB2.0 high-speed, SD-card, SIM card	IP4221CZ6-S	SOT886 (XSON6) 	1.45 x 1.0 x 0.5
		-	1	ESD protection for USB2.0 high-speed, SD-card, SIM card	IP4221CZ6-XS	SOT891 (XSON6) 	1.0 x 1.0 x 0.5
		1	3	>15 kV IEC contact ESD protection with pi-filter	IP4225CZ10	SOT457 (SC-74) 	2.9 x 1.5 x 1.0

ESD protection acc. to IEC 61000-4-2 (level 4)

USB, SATA, LAN


types in **bold** represent new products

Baseband interface	Number of protected lines	R_{line}	C_{line} (pF)	Remark	Type	Package	Size (mm)
Display port	4	-	0.6	ESD protection for ultra high-speed interfaces	IP4286CZ6-TTY	SOT363 (SC-88) 	2.0 x 1.25 x 0.95
	11	-	0.7	ESD protection	IP4790CZ38	SOT510 (TSSOP38) 	9.7 x 4.4 x 1.1
SATA	2	-	0.7	ESD protection for ultra high-speed interfaces	IP4282CZ6	SOT886 (XSON6) 	1.45 x 1.0 x 0.5
		-	0.6	ESD protection for ultra high-speed interfaces	IP4286CZ6-TBF	SOT363 (SC-88) 	2.0 x 1.25 x 0.95
		-	0.6	ESD protection for ultra high-speed interfaces	IP4286CZ6-TTY		
	4	-	0.6	ESD protection for ultra high-speed interfaces	IP4283CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5
		-	0.6	ESD protection for ultra high-speed interfaces	IP4283CZ10-TT	SOT552 (TSSOP10) 	3.0 x 3.0 x 1.1
		-	0.5	ESD protection for ultra high-speed interfaces	IP4284CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5
		-	0.5	ESD protection for ultra high-speed interfaces	IP4284CZ10-TT	SOT552 (TSSOP10) 	3.0 x 3.0 x 1.1
		-	0.8	ESD protection for ultra high-speed interfaces	IP4285CZ9-TBB	SOT1178 (XSON9) 	1.0 x 2.5 x 0.1
		-	0.5	ESD protection for ultra high-speed interfaces	IP4292CZ10-TBR	SOT1176 (XSON10) 	1.0 x 2.5 x 0.5

ESD protection acc. to IEC 61000-4-2 (level 4)

TVS diodes

TVS diodes, 24 W/40 W

Power (W) (10/1000 μ s waveform) ^[1]	Reverse Voltage					I_R (mA)	ESD rating ^[2] max (kV)	C_{line} typ (pF)	V_{CL} max (V) @ I_{PP}	I_{PP} (A)	I_{RM} max (μ A) @ V_{RWM}	Configuration	Type	Package	Size (mm)
	V_{RWM} (V)	V_{BR} min (V) @ I_R	V_{BR} typ (V) @ I_R	V_{BR} max (V) @ I_R											
24	3	5.32	5.6	5.88	20	30	210	8	3	5		MMBZ5V6AL	SOT23	2.9 x 1.3 x 1.0	
	3	5.89	6.2	6.51	1	30	175	8.7	2.76	0.2		MMBZ6V2AL			
	4.5	6.48	6.8	7.14	1	30	150	9.6	2.5	0.3		MMBZ6V8AL			
	6	8.65	9.1	9.56	1	30	155	14	1.7	0.1		MMBZ9V1AL			
	6.5	9.5	10	10.5	1	30	130	14.2	1.7	0.02		MMBZ10VAL			
40	8.5	11.4	12	12.6	1	30	110	17	2.35	0.005		MMBZ12VAL			
	12	14.25	15	15.75	1	30	85	21	1.9	0.005		MMBZ15VAL			
	14.5	17.1	18	18.9	1	30	70	25	1.6	0.005		MMBZ18VAL			
	17	19	20	21	1	30	65	28	1.4	0.005		MMBZ20VAL			
	22	25.65	27	28.35	1	30	48	40	1	0.005		MMBZ27VAL			
	26	31.35	33	34.65	1	30	45	46	0.87	0.005		MMBZ33VAL			
	8.5	11.4	12	12.6	1	30	110	17	2.35	0.005		MMBZ12VDL			
	12.8	14.3	15	15.8	1	30	85	21.2	1.9	0.005		MMBZ15VDL			
	14.5	17.1	18	18.9	1	30	70	25	1.6	0.005		MMBZ18VCL			
	17	19	20	21	1	30	65	28	1.4	0.005	MMBZ20VCL				
	22	25.65	27	28.35	1	30	48	38	1	0.005	MMBZ27VCL				
	26	31.35	33	34.65	1	30	45	46	0.87	0.005	MMBZ33VCL				

^[1] acc. to IEC 61643-321

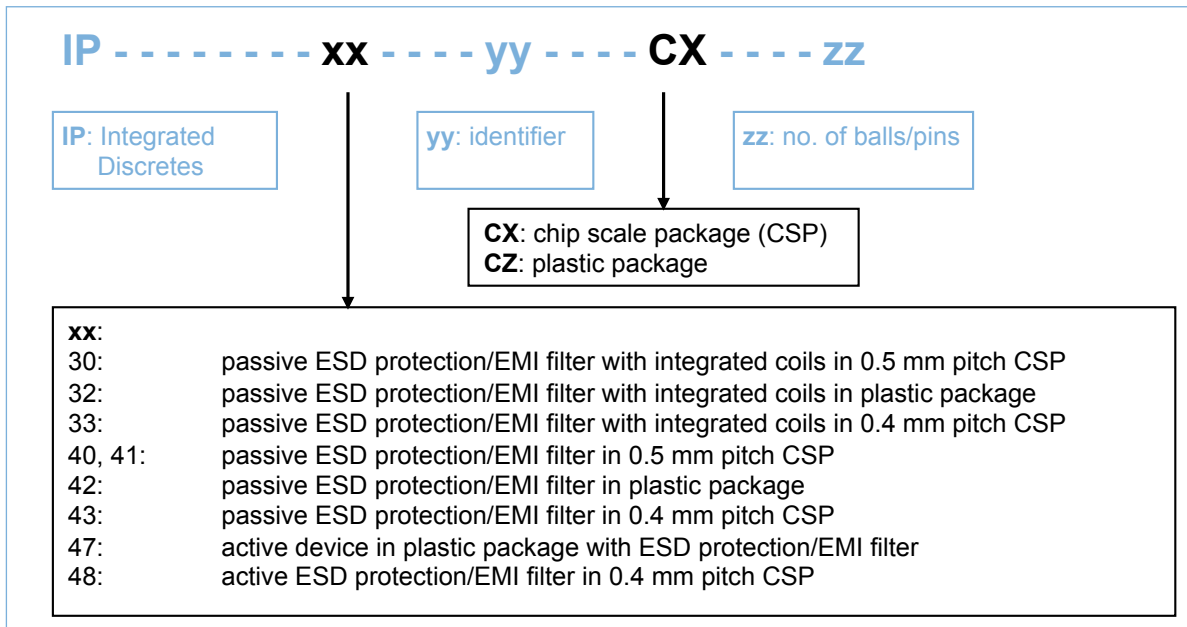
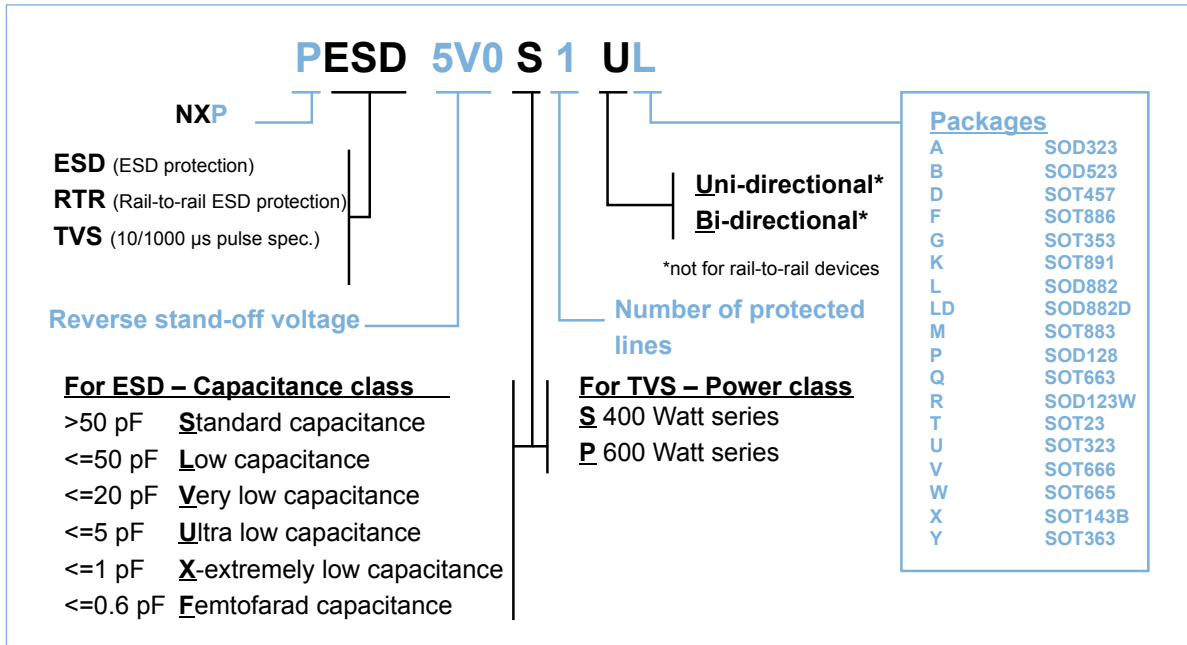
^[2] acc. to IEC 61000-4-2 (contact discharge)

TVS diodes, 400 W

Power (W) (10/1000 μ s waveform) ^[1]	Reverse Voltage					I_R (mA)	V_{CL} max (V) @ I_{PP}	I_{PP} (A)	I_{RM} typ (μ A) @ V_{RWM}	I_{RM} max (μ A) @ V_{RWM}	Type	Package	Size (mm)
V_{RWM} (V)	V_{BR} min (V) @ I_R	V_{BR} typ (V) @ I_R	V_{BR} max (V) @ I_R										
350	3.5	5.20	5.60	6.00	10	8.0	43.8	5	600	PTVS3V3S1UR	SOD123W	2.6 x 1.7 x 1.0	
400	5.0	6.40	6.70	7.00	10	9.2	43.5	5	400	PTVS5V0S1UR			
	6.0	6.67	7.02	7.37	10	10.3	38.8	5	400	PTVS6V0S1UR			
	6.5	7.22	7.60	7.98	10	11.2	35.7	5	250	PTVS6V5S1UR			
	7.0	7.78	8.20	8.60	10	12.0	33.3	3	100	PTVS7V0S1UR			
	7.5	8.33	8.77	9.21	1	12.9	31.0	0.2	50	PTVS7V5S1UR			
	8.0	8.89	9.36	9.83	1	13.6	29.4	0.03	25	PTVS8V0S1UR			
	8.5	9.44	9.92	10.40	1	14.4	27.8	0.01	10	PTVS8V5S1UR			
	9.0	10.00	10.55	11.10	1	15.4	26.0	0.005	5	PTVS9V0S1UR			
	10	11.10	11.70	12.30	1	17.0	23.5	0.005	2.5	PTVS10VS1UR			
	11	12.20	12.85	13.50	1	18.2	22.0	0.005	2.5	PTVS11VS1UR			
	12	13.30	14.00	14.70	1	19.9	20.1	0.005	2.5	PTVS12VS1UR			
	13	14.40	15.15	15.90	1	21.5	18.6	0.001	0.1	PTVS13VS1UR			
	14	15.60	16.40	17.20	1	23.2	17.2	0.001	0.1	PTVS14VS1UR			
	15	16.70	17.60	18.50	1	24.4	16.4	0.001	0.1	PTVS15VS1UR			
	16	17.80	18.75	19.70	1	26.0	15.4	0.001	0.1	PTVS16VS1UR			
	17	18.90	19.90	20.90	1	27.6	14.5	0.001	0.1	PTVS17VS1UR			
	18	20.00	21.00	22.10	1	29.2	13.7	0.001	0.1	PTVS18VS1UR			
	20	22.20	23.35	24.50	1	32.4	12.3	0.001	0.1	PTVS20VS1UR			
	22	24.40	25.60	26.90	1	35.5	11.3	0.001	0.1	PTVS22VS1UR			
	24	26.70	28.10	29.50	1	38.9	10.3	0.001	0.1	PTVS24VS1UR			
	26	28.90	30.40	31.90	1	42.1	9.5	0.001	0.1	PTVS26VS1UR			
	28	31.10	32.80	34.40	1	45.4	8.8	0.001	0.1	PTVS28VS1UR			
	30	33.30	35.10	36.80	1	48.4	8.3	0.001	0.1	PTVS30VS1UR			
	33	36.70	38.70	40.60	1	53.3	7.5	0.001	0.1	PTVS33VS1UR			
	36	40.00	42.10	44.20	1	58.1	6.9	0.001	0.1	PTVS36VS1UR			
	40	44.40	46.80	49.10	1	64.5	6.2	0.001	0.1	PTVS40VS1UR			
	43	47.80	50.30	52.80	1	69.4	5.8	0.001	0.1	PTVS43VS1UR			
	45	50.00	52.65	55.30	1	72.7	5.5	0.001	0.1	PTVS45VS1UR			
	48	53.30	56.10	58.90	1	77.4	5.2	0.001	0.1	PTVS48VS1UR			
	51	56.70	59.70	62.70	1	82.4	4.9	0.001	0.1	PTVS51VS1UR			
	54	60.00	63.15	66.30	1	87.1	4.6	0.001	0.1	PTVS54VS1UR			
	58	64.40	67.80	71.20	1	93.6	4.3	0.001	0.1	PTVS58VS1UR			
	60	66.70	70.20	73.70	1	96.8	4.1	0.001	0.1	PTVS60VS1UR			
	64	71.10	74.85	78.60	1	103.0	3.9	0.001	0.1	PTVS64VS1UR			

^[1] 10/1000 μ s acc. to IEC 61643-321





Protection and signal conditioning nomenclature



General purpose bipolar transistors





Single transistors NPN

types in **bold** represent new products



Package					SOT23	SOT323 (SC-70)	SOT416 (SC-75)	SOT883 (SC-101)
								
Size (mm)					2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.6 x 0.8 x 0.77	1.0 x 0.6 x 0.5
P _{tot} (mW)					250	200	150	250
V _{CEO} (V)	I _C (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)				
25	100	450	1200	100		PMST5089		
30	100	110 - 200	450 - 800	100	BC848B	BC848W		
		350	900	100		PMST5088		
32	100	110 - 420	220 - 800	100	BCW31 / 32 / 33			
		180 - 380	310 - 630	250	BCW60B / C / D			
40	100	120 - 270	270 - 560	100				2PC4617QM / RM
45	100	110 - 420	220 - 800	100	BC847 / A / B / C	BC847W / AW / BW / CW	BC847T / AT / BT / CT	BC847AM / BM / CM
		120 - 380	220 - 630	100	BCX70G / H / J / K			
		110 - 200	220 - 450	100	BCW71 / 72			
50	100	210 - 290	340 - 460	100 - 150	PMBT6429 2PD601ART 2PD601ARL 2PD601ASL	PMST6429 2PD601ARW / SW		
		250	650	100	PMBT6428	PMST6428		
60	100	110 - 200	220 - 450	100	BCV71 / 72			
65	100	110 - 200	220 - 450	100	BC846 / A / B	BC846W / AW / BW	BC846T / AT / BT	
80	100	20	80	60	BSS64			
50	150	120 - 270	270 - 560	100		2PC4081Q / R / S	2PC4617Q / R	
	200	210	340	100	2PD601BRL			
45	500	290	460	100	2PD601BSL			
		100 - 250	250 - 600	100	BC817 / -16 / -25 / -40	BC817W / -16W / -25W / -40W		
50	500	100	600	100	BCX19 2PD602AQL 2PD602ARL 2PD602ASL	2PD1820AR / S		
		85 - 170	170 - 340	140 - 180				
60	500	50	-	100		PMSTA05		

Single transistors PNP

types in **bold** represent new products






Package					SOT23	SOT323 (SC-70)	SOT416 (SC-75)	SOT883 (SC-101)
								
Size (mm)					2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.6 x 0.8 x 0.77	1.0 x 0.6 x 0.5
P _{tot} (mW)					250	200	150	250
V _{CEO} (V)	I _C (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)				
80	500	100	-	100	PMBTA06	PMSTA06		
30	100	125 - 220	500 - 800	100	BC858B	BC858W		
		120 - 215	260 - 500	100	BCW29 / 30			
32	100	180 - 380	310 - 630	100	BCW61B / C / D			
		120 - 270	270 - 560	100				2PA1774QM / RM / SM
45	100	210 - 290	340 - 460	70 - 80	2PB709ART 2PB709ARL 2PB709ASL	2PB709ARW / SW		
		180 - 380	310 - 630	100	BCX71H / J / K			
		120 - 215	260 - 500	100	BCW69 / 70			
		125 - 420	250 - 800	100	BC857 / A / B / C	BC857W / AW / BW / CW	BC857T / AT / BT / CT	BC857AM / BM / CM
60	100	120	260	150	BCW89			
65	100	125 - 200	250 - 475	100	BC856 / A / B	BC856W / AW / BW	BC856T / AT / BT	
100	100	30	-	50	BSS63			
50	150	120 - 270	270 - 560	100		2PA1576Q / R / S	2PA1774Q / R / S	
	200	210	340	100	2PD601BRL			
25	500	290	460	100	2PD601BSL			
		100	600	80	BCX18			
45	500	100 - 250	250 - 600	80	BC807 / -16 / -25 / -40	BC807W / -16W / -25W / -40W		
		100	600	80	BCX17			
50	500	85 - 170	170 - 340	100 - 140	2PB710ARL 2PB710ASL	2PB1219AQ / R / S		
60	500	100	-	50		PMSTA55		
80	500	100	-	50	PMBTA56	PMSTA56		

Medium power general purpose transistors

Package						SOT223 (SC-73)	SOT89 (SC-62)
							
Size (mm)						6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5
P _{tot} (mW)						1700	1300
Polarity	V _{CEO} (V)	I _C (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)		
NPN	20	1000	85 - 160	375	40	BCP68 / -25	BC868 / -25
	45	1000	63 - 100	160 - 250	100	BCP54 / -10 / -16	BCX54 / -10 / -16
	60	1000	63 - 100	160 - 250	100	BCP55 / -10 / -16	BCX55 / -10 / -16
			100	300	100	BSP41	BSR41
	80	1000	63 - 100	160 - 250	100	BCP56 / -10 / -16	BCX56 / -10 / -16
40 - 100			120 - 300	100	BSP43	BSR42 / 43	
PNP	20	1000	85 - 160	250 - 375	40	BCP69 / -16 / -25	BC869 / -16 / -25
	45	1000	63 - 100	160 - 250	115 ¹⁾ - 145 ¹⁾	BCP51 / -10 / -16	BCX51 / -10 / -16
	60	1000	63 - 100	160 - 250	100	BCP52 / -10 / -16	BCX52 / -10 / -16
			40 - 100	120 - 300	100	BSP31	BSR30 / 31
	80	1000	63 - 100	160 - 250	115 ¹⁾ - 145 ¹⁾	BCP53 / -10 / -16	BCX53 / -10 / -16
40 - 100			120 - 300	100	BSP32 / 33	BSR33	



¹⁾ typical value

High voltage transistors




Package						SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	SOT23	SOT323 (SC-70)
										
Size (mm)						6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P _{tot} (mW)						1700	1300	600	250	200
Polarity	V _{CEO} (V)	I _C (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)					
NPN	80	100	20	-	60				BSS64	
	140	100	60	250	100				PMBT5550	PMST5550
	160	300	80	250	100				PMBT5551/BSR19A	PMST5551
	250	100	50	-	60	BF722	BF622		BF822	
			50	-	60	BF720	BF620		BF820	BF820W
	300	100	40	-	50	PZTA42	PXTA42		PMBTA42	PMSTA42
			40	-	70	BSP19	BST39			
400	300	50	200	20	PZTA44			PMBTA44		
PNP	100	100	30	-	50				BSS63	
	250	100	50	-	60	BF723				
			50	-	60		BF623		BF823	
	300	100	50	-	60		BF621		BF821	
40			-	50	PZTA92	PXTA92		PMBTA92	PMSTA92	
2 x NPN	300	100	40	-	50				PMBTA42DS	

For high voltage transistors with increased performance please refer to our high voltage low V_{CEsat} (BISS) transistor portfolio on page 66.


Low noise transistors

Package							SOT23	SOT323 (SC-70)
								
Size (mm)							2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P _{tot} (mW)							250	200
Polarity	V _{CEO} (V)	I _C (mA)	NF max (dB)	h _{FE} min	h _{FE} max	f _T min (MHz)		
NPN	30	100	4	200	450	100	BC849B	BC849BW
				420	800	100	BC849C	BC849CW
	45	100	4	200	450	100	BC850B	BC850BW
				420	800	100	BC850C	BC850CW
PNP	30	100	4	220	475	100	BC859B	BC859BW
				420	800	100	BC859C	BC859CW
	45	100	4	220	475	100	BC860B	BC860BW
				420	800	100	BC860C	BC860CW

Darlington transistors

Package					SOT223 (SC-73)	SOT89 (SC-62)	SOT23		
									
Size (mm)					6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.3 x 1.0		
P _{tot} (mW)					1700	1300	250		
Polarity	V _{CEO} (V)	I _C (mA)	h _{FE} min	f _T min (MHz)					
NPN	30	500	10000	125			PMBTA13		
			20000	125	PZTA14	PXTA14	PMBTA14		
	45	1000	2000	200			BCV29	BCV27	
			10000	220			BCV49	BCV47	
			2000	200	BSP50	BST50			
			10000	220			BCV49	BCV47	
80	1000	2000	200						
		2000	200	BSP51	BST51				
PNP	30	500	20000	125			PMBTA64		
			220	200			BCV28	BCV26	
	45	1000	2000	200			BSP60	BST60	
			10000	220				BCV48	BCV46
			2000	200			BSP61	BST61	
			10000	220					
80	1000	2000	200			BSP62	BST62		
		2000	200						

Schmitt trigger

Package							SOT143B
							
Size (mm)							2.9 x 1.3 x 1.0
P _{tot} (mW)							250
Polarity	V _{CEO} (V) TR1	V _{CEO} (V) TR2	I _C (mA)	h _{FE} min	h _{FE} max	V _{CEsat} typ (mV)	
NPN	30	6	100	110	800	250	BCV63 / B
PNP	30	6	100	220	475	250	BCV64B

Key features

- ▶ Low current (max. 100 mA)
- ▶ Low voltage (max. 30 and 6 V)

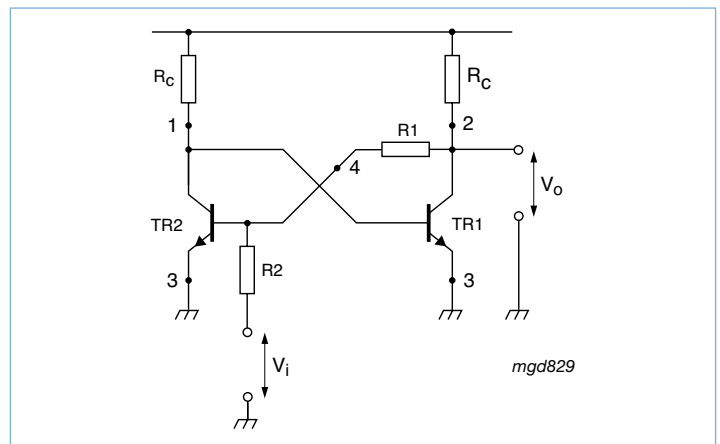
Key benefits

- ▶ Reduced component count and pick-and-place costs
- ▶ Smaller designs

Key applications




- ▶ General purpose switching and amplification
- ▶ Schmitt trigger applications




Schmitt trigger






Resistor-equipped transistors (RETs)

RETs 100 mA single




Package					SOT23		SOT323 (SC-70)		
									
Size (mm)					2.9 x 1.3 x 1.0		2.0 x 1.25 x 0.95		
P _{tot} (mW)					250		200		
V _{CEO} (V)	I _c (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN	PNP	NPN	PNP	
50	100		1	1			PDTA113ET		PDTA113EU
			2.2	2.2	PDTC123ET	PDTC123ET	PDTC123EU	PDTC123EU	
			4.7	4.7	PDTC143ET	PDTC143ET	PDTC143EU	PDTC143EU	
			10	10	PDTC114ET	PDTC114ET	PDTC114EU	PDTC114EU	
			22	22	PDTC124ET	PDTC124ET	PDTC124EU	PDTC124EU	
			47	47	PDTC144ET	PDTC144ET	PDTC144EU	PDTC144EU	
			100	100	PDTC115ET	PDTC115ET	PDTC115EU	PDTC115EU	
			1	10			PDTA113ZT		PDTA113ZU
			2.2	10	PDTC123YT	PDTC123YT	PDTC123YU	PDTC123YU	
			2.2	47	PDTC123JT	PDTC123JT	PDTC123JU	PDTC123JU	
		4.7	10	PDTC143XT	PDTC143XT	PDTC143XU	PDTC143XU		
		4.7	47	PDTC143ZT	PDTC143ZT	PDTC143ZU	PDTC143ZU		
		10	47	PDTC114YT	PDTC114YT	PDTC114YU	PDTC114YU		
		22	47	PDTC124XT	PDTC124XT	PDTC124XU	PDTC124XU		
		47	10	PDTC144VT	PDTC144VT	PDTC144VU	PDTC144VU		
		47	22	PDTC144WT	PDTC144WT	PDTC144WU	PDTC144WU		
		2.2	-	PDTC123TT	PDTC123TT	PDTC123TU	PDTC123TU		
		4.7	-	PDTC143TT	PDTC143TT	PDTC143TU	PDTC143TU		
		10	-	PDTC114TT	PDTC114TT	PDTC114TU	PDTC114TU		
		22	-	PDTC124TT	PDTC124TT	PDTC124TU	PDTC124TU		
47	-	PDTC144TT	PDTC144TT	PDTC144TU	PDTC144TU				
100	-	PDTC115TT	PDTC115TT	PDTC115TU	PDTC115TU				

Package					SOT416 (SC-75)		SOT883 (SC-101)		
									
Size (mm)					1.6 x 0.8 x 0.77		1.0 x 0.6 x 0.5		
P _{tot} (mW)					150		250		
V _{CEO} (V)	I _c (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN	PNP	NPN	PNP	
50	100		1	1			PDTA113EE		PDTA113EM
			2.2	2.2	PDTC123EE	PDTC123EE	PDTC123EM	PDTC123EM	
			4.7	4.7	PDTC143EE	PDTC143EE	PDTC143EM	PDTC143EM	
			10	10	PDTC114EE	PDTC114EE	PDTC114EM	PDTC114EM	
			22	22	PDTC124EE	PDTC124EE	PDTC124EM	PDTC124EM	
			47	47	PDTC144EE	PDTC144EE	PDTC144EM	PDTC144EM	
			100	100	PDTC115EE	PDTC115EE	PDTC115EM	PDTC115EM	
			1	10			PDTA113ZE		PDTA113ZM
			2.2	10	PDTC123YE	PDTC123YE	PDTC123YM	PDTC123YM	
			2.2	47	PDTC123JE	PDTC123JE	PDTC123JM	PDTC123JM	
		4.7	10	PDTC143XE	PDTC143XE	PDTC143XM	PDTC143XM		
		4.7	47	PDTC143ZE	PDTC143ZE	PDTC143ZM	PDTC143ZM		
		10	47	PDTC114YE	PDTC114YE	PDTC114YM	PDTC114YM		
		22	47	PDTC124XE	PDTC124XE	PDTC124XM	PDTC124XM		
		47	10	PDTC144VE	PDTC144VE	PDTC144VM	PDTC144VM		
		47	22	PDTC144WE	PDTC144WE	PDTC144WM	PDTC144WM		
		2.2	-	PDTC123TE	PDTC123TE	PDTC123TM	PDTC123TM		
		4.7	-	PDTC143TE	PDTC143TE	PDTC143TM	PDTC143TM		
		10	-	PDTC114TE	PDTC114TE	PDTC114TM	PDTC114TM		
		22	-	PDTC124TE	PDTC124TE	PDTC124TM	PDTC124TM		
47	-	PDTC144TE	PDTC144TE	PDTC144TM	PDTC144TM				
100	-	PDTC115TE	PDTC115TE	PDTC115TM	PDTC115TM				

Low V_{CEsat} (BISS) transistors single NPN

Package											SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	
														
Size (mm)											6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0	
P _{tot} (mW)											1700	1650	750	
V _{CEO} (V)	I _C (A)	I _{CM} (A)	h _{FE} min/typ	@ I _C (A)	@ V _{CE} (V)	R _{CEsat} typ (mΩ); I _C /I _B = 10	V _{CEsat} typ (mV); I _C = 0.5 A; I _B = 0.05 A	V _{CEsat} max (mV)	@ I _C (A)	@ I _B (A)				
12	5.3	10.6	300/530	0.5	2	27 ¹⁾	18	200	5.3	0.265			PBSS301NX	
	5.8	11.6	300/530	0.5	2	29 ¹⁾	18	235	5.8	0.29	PBSS301NZ			
	6.0	7.0	280/440	0.5	2	33 ¹⁾	20	275	6	0.3				
15	0.5	1.0	200/325	0.01	2	360	-	250	0.5	0.05				
			200/425	0.01	2	300	200	250	0.5	0.05				
20	1.0	3.0	350/470	0.1	2	220	110 ²⁾	250	1	0.05				
			220/410	0.5	2	140	70	350	2	0.2				
	2.0	5.0	220/330	0.1	2	80	45	310	3	0.3				
			220/390	0.5	2	85	40	310	3	0.3			PBSS4320X	
	4.0	15.0	300/450	0.5	2	50	30	280	4	0.4			PBSS301ND	
	4.3	8.0	300/550	0.5	2	36	21	220	4	0.2				
	5.0	10.0	300/450	0.5	2	32	35	220	5	0.5			PBSS4520X	
	5.3	10.6	300/570	0.5	2	27 ¹⁾	20	200	5.3	0.265			PBSS302NX	
	5.8	10.2	300/570	0.5	2	30 ¹⁾	20	250	5.8	0.29	PBSS302NZ			
	6.0	7.0	280/440	0.5	2	33 ¹⁾	20	275	6	0.3				
7.0	15.0	300/550	0.5	2	19	12	210	7	0.35			PBSS4021NX		
8.0	20.0	300/550	0.5	2	14	9	170	8	0.4	PBSS4021NZ				
30	1.0	3.0	300/450	0.5	2	240	120 ²⁾	270	1	0.05				
			300/450	0.5	2	120	70	320	2	0.2				
	2.6	5.0	300/500	0.5	2	76	80	320	3	0.3				
			300/490	0.5	2	80	45	300	3	0.3			PBSS4330X	
	3.0	5.0	300/465	0.5	2	75	40	300	3	0.3				
	3.5	6.0	300/500	0.5	2	50	70	300	4	0.4				PBSS4032ND ³⁾
	4.7	10.0	300/500	0.5	2	45	57	250	4	0.4			PBSS4032NX ³⁾	
	5.1	10.2	300/480	0.5	2	30 ¹⁾	20	220	5.1	0.255			PBSS303NX	
	5.4	10.0	300/500	0.5	2	45	57	340	4.9	0.27	PBSS4032NZ ³⁾			
	5.5	11.0	300/480	0.5	2	31 ¹⁾	20	240	5.5	0.275	PBSS303NZ			
6.0	7.0	280/450	0.5	2	35 ¹⁾	21	275	6	0.3					
40	0.5	1.0	200/550	0.01	2	380	200 ²⁾	250	0.5	0.05				
			200/350	0.01	2	380	190	250	0.5	0.05				
	3.0	-	300/-	0.5	5	150	70	440	2	0.2				
			300/440	0.5	5	240	130	500	1	0.1				
	1.0	2.0	300/510	0.5	5	230	120	500	1	0.1				
			300/420	0.5	5	150	130	500	1	0.1				
	3.0	4.0	300/400	0.5	5	150	70	400	2	0.2				
			350/470	0.1	2	120	70	320	2	0.2				
	4.0	15.0	300/450	0.5	2	120	70	320	2	0.2				
			300/520	0.5	2	55	35	300	4	0.4				PBSS302ND
5.0	10.0	300/500	0.5	2	40	21	355	5	0.5			PBSS4540X		
		300/500	0.5	2	42	25	355	5	0.5	PBSS4540Z				
50	2.0	5.0	300/495	0.5	2	100	60	260	2	0.2				
			300/-	0.5	2	160	90 ²⁾	320	2	0.2			PBSS4250X	
	3.0	5.0	200/280	0.5	2	110	65	290	2	0.2				PBSS4350D
			300/460	0.5	2	75	50	370	3	0.3			PBSS4350X	
200/280	0.5	2	110	60 ¹⁾	290	2	0.2	PBSS4350Z						
60	1.0	2.0	200/400	0.5	5	200	110	250	1	0.1				
			200/420	0.5	5	230	120	280	1	0.1				
	200/350	0.5	5	200	110	250	1	0.1						
	3.0	6.0	345/570	0.5	2	65	40	260	3	0.3			PBSS303ND	
	3.8	8.0	300/500	0.5	2	46	29	200	3	0.3				
	4.7	9.4	300/520	0.5	2	37 ¹⁾	25	245	4.7	0.235			PBSS304NX	
	5.2	10.4	300/520	0.5	2	39 ¹⁾	25	280	5.2	0.26	PBSS304NZ			
	6.0	7.0	280/440	0.5	2	34 ¹⁾	22	290	6	0.3				
6.2	15.0	300/500	0.5	2	25	17	230	6	0.3			PBSS4041NX		
7.0	15.0	300/500	0.5	2	17.5	13	195	7	0.35	PBSS4041NZ				
80	3.0	6.0	240/360	0.5	2	67	40	255	3	0.3				PBSS304ND
	4.0	10.0	250/400	0.5	2	43 ¹⁾	25	230	4	0.2			PBSS4480X	
	4.6	9.2	300/470	0.5	2	37 ¹⁾	25	240	4.6	0.23			PBSS305NX	
	5.1	10.2	300/470	0.5	2	38 ¹⁾	25	270	5.1	0.255	PBSS305NZ			
	5.6	7.0	270/425	0.5	2	40 ¹⁾	25	320	5.6	0.28				
100	1.0	3.0	150/400	0.25	10	160	80	200	1	0.1				
			150/300	0.25	10	165	70	200	1	0.1				
			150/290	0.25	10	160	75	200	1	0.1				PBSS8110D
			150/290	0.25	10	165	73	200	1	0.1			PBSS8110X	
			150/290	0.25	10	160	73	200	1	0.1	PBSS8110Z			
	3.0	4.0	170/275	0.5	2	72	45	360	4	0.4			PBSS305ND	
	4.5	9.0	200/330	0.5	2	38 ¹⁾	27	245	4.5	0.225			PBSS306NX	
5.1	10.2	200/330	0.5	2	43 ¹⁾	27	300	5.1	0.255	PBSS306NZ				
5.2	6.0	180/285	0.5	2	48 ¹⁾	30	340	5.2	0.26					

Low V_{CEsat} (BISS) transistors single PNP

Package											SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)		
															
Size (mm)											6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0		
P _{tot} (mW)											1700	1650	750		
V _{CEO} (V)	I _C (A)	I _{CM} (A)	h _{FE} min/typ	@ I _C (V)	@ V _{CE} (V)	R _{CEsat} typ (mΩ); I _C /I _B = 10	V _{CEsat} typ (mV); I _C = 0.5 A; I _B = 0.05 A	V _{CEsat} max (mV)	@ I _C (A)	@ I _B (A)					
12	5.3	10.6	250/400	0.5	2	28 ¹⁾	20	210	5.3	0.265			PBSS301PX		
	5.7	11.4	250/400	0.5	2	30 ¹⁾	20	245	5.7	0.285	PBSS301PZ				
	6.0	7.0	220/335	0.5	2	33 ¹⁾	20	300	6	0.3					
15	0.5	1.0	200/260	0.01	2	300	150	250	0.5	0.05					
			200/325	0.01	2	300	150	250	0.5	0.05					
20	1.0	2.0	300/450	0.1	2	250	125 ²⁾	250	1	0.05					
	2.0	4.0	220/440	0.1	2	140	75	390	2	0.2					
		3.0	225/-	0.5	2	115	80 ²⁾	225	2	0.2					
		5.0	220/420	0.5	2	75	50	210	2	0.2					
	3.0	200/-	0.5	2	85	80 ²⁾	400	3	0.3					PBSS5320D	
		5.0	220/450	0.5	2	90	50	300	3	0.3				PBSS5320X	
	3.5	8.0	250/400	0.5	2	55	35	375	4	0.2					
	4.0	15.0	250/400	0.5	2	50	35	280	4	0.4				PBSS301PD	
	5.0	10.0	300/430	0.5	2	34	45	270	5	0.5				PBSS5520X	
	5.1	10.2	250/370	0.5	2	32 ¹⁾	25	230	5.1	0.255				PBSS302PX	
	5.5	11.0	250/370	0.5	2	34 ¹⁾	25	265	5.5	0.275	PBSS302PZ				
	6.0	7.0	230/345	0.5	2	39 ¹⁾	25	350	6	0.3					
6.2	15.0	250/400	0.5	2	23	18	240	6	0.3				PBSS4021PX		
6.6	20.0	250/400	0.5	2	22	16	240	7	0.35	PBSS4021PZ					
30	1.0	3.0	260/350	0.5	2	220	110	225	1	0.05					
	2.0	3.0	300/450	0.1	2	160	70	350	2	0.2					
	2.4	5.0	200/320	0.5	2	110	95	330	2	0.2					
	2.7	5.0	200/350	0.5	2	88	87	395	3	0.3				PBSS4032PD ³⁾	
	3.0	5.0	200/380	0.5	2	80	50	320	3	0.3				PBSS5330X	
	3.0	5.0	200/320	0.5	2	75	45	320	3	0.3					
	4.2	10.0	200/350	0.5	2	58	70	345	4	0.4				PBSS4032PX ³⁾	
	4.4	10.0	200/350	0.5	2	58	70	400	4	0.2	PBSS4032PZ ³⁾				
	5.1	10.2	250/400	0.5	2	32 ¹⁾	25	230	5.1	0.255				PBSS303PX	
	5.3	10.6	250/400	0.5	2	35 ¹⁾	25	265	5.3	0.265	PBSS303PZ				
	6.0	7.0	200/335	0.5	2	39 ¹⁾	25	350	6	0.3					
40	0.5	1.0	200/380	0.01	2	440	220	350	0.5	0.05					
	1.0	2.0	200/380	0.01	2	440	230	350	0.5	0.05					
			300/-	0.1	5	200	120	310	1	0.1					
			300/520	0.1	5	230	130	500	1	0.1					
			300/800	0.1	5	250	130	500	1	0.1					
	1.8	3.0	300/510	0.1	5	230	130	500	1	0.1					
			300/450	0.1	5	185	100	530	2	0.2					
	2.0	3.0	300/-	0.1	2	200	110 ²⁾	350	2	0.2					
	4.0	15.0	300/450	0.1	2	150	70	350	2	0.2					
			200/310	0.5	2	55	46	300	4	0.4					
250/370			0.5	2	45	33	375	5	0.5				PBSS302PD		
250/350			0.5	2	55	40 ¹⁾	160	2	0.2	PBSS5540Z					
50	3.0	200/-	0.5	2	150	90 ²⁾	300	2	0.1						
		200/360	0.5	2	90	55	270	2	0.2						
		200/-	0.5	2	160	90 ²⁾	320	2	0.2				PBSS5250X		
	3.0	5.0	200/300	0.5	2	120	70	300	2	0.2					
			200/375	0.5	2	120	70	390	3	0.3				PBSS5350X	
			200/300	0.5	2	120	70	300	2	0.2	PBSS5350Z				
60	1.0	2.0	150/250	0.5	5	220	120	330	1	0.1					
			150/250	0.5	5	255	135	340	1	0.1					
			150/250	0.5	5	220	120	330	1	0.1					
	2.7	8.0	200/300	0.5	2	80	49	360	3	0.3					
	3.0	6.0	180/265	0.5	2	70	55	290	3	0.3				PBSS303PD	
	4.2	8.4	200/295	0.5	2	53 ¹⁾	35	310	4.2	0.21				PBSS304PX	
	4.5	9.0	200/295	0.5	2	59 ¹⁾	35	375	4.5	0.225	PBSS304PZ				
	5.0	6.0	170/260	0.5	2	35 ¹⁾	35	450	5	0.25					
5.7	15.0	200/300	0.5	2	40	30	300	5	0.5					PBSS4041PX	
		200/300	0.5	2	29	22	285	6	0.3	PBSS4041PZ					
		200/225	0.5	2	71	55	290	3	0.3					PBSS304PD	
80	3.0	5.0	155/225	0.5	2	65 ¹⁾	40	420	4	0.2					
			180/265	0.5	2	50	35	380	5	0.5					
	4.0	10.0	200/300	0.5	2	43	36	240	4	0.4				PBSS5480X	
			200/280	0.5	2	69 ¹⁾	36	450	4.5	0.225	PBSS305PZ				
100	1.0	3.0	150/-	0.25	5	170	93	320	1	0.1					
			150/350	0.5	5	170	95	320	1	0.1					
			150/350	0.5	5	170	100	320	1	0.1				PBSS9110D	
			150/350	0.5	5	170	90	320	1	0.1					
			150/-	0.5	5	170	90	320	1	0.1	PBSS9110Z				
	2.0	3.0	175/275	0.5	2	88	65	250	2	0.2				PBSS305PD	
	2.7	4.0	180/295	0.5	2	110 ¹⁾	45	450	2.7	0.135					
3.7	7.4	200/300	0.5	2	52	45	300	4	0.4				PBSS306PX		
4.1	8.2	200/300	0.5	5	57	45	325	4.1	0.41	PBSS306PZ					

In the Spotlight

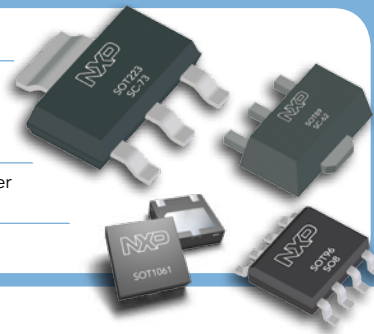
New low V_{CEsat} (BISS) transistors

Industry's first combination of reduced switching times (down to 125 ns) with minimized saturation voltage (below 50 mV)

Voltage range from 12 V to 100 V

Flexible package options, from standard SMD to brand new medium power leadless package SOT1061 (2 x 2 x 0.65 mm)

Benchmark for reduced on-state-resistance



Low V_{CEsat} (BISS) double transistors

Package										SOT96 (SO8)	SOT457 (SC-74)	SOT363 (SC-88)	SOT666
Size (mm)										4.9 x 3.9 x 1.75	2.9 x 1.5 x 1.0	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55
P _{tot} (mW)										2000 ²⁾	750	430	500
V _{CEO} (V)	I _C (A)	Polarity	h _{FE min}	@ I _C (A)	@ V _{CE} (V)	V _{CEsat typ} (mV); I _C = 0.5 A; I _B = 0.05 A	V _{CEsat max} (mV)	@ I _C (A)	@ I _B (A)				
15	0.5	2 x NPN	200	0.01	2	170 ¹⁾	250	0.5	0.05				PBSS2515VS
		2 x PNP	200	0.01	2	170 ¹⁾	250	0.5	0.05				PBSS3515VS
		NPN/PNP	200	0.01	2	170 ¹⁾	250	0.5	0.05				PBSS2515VPN
		NPN/PNP	200	0.01	2	170 ¹⁾	250	0.5	0.05			PBSS2515YPN	
20	7.5	NPN/NPN	300	0.5	2	15	150	4	0.2	PBSS4021SN			
	6.3	PNP/PNP	250	0.5	2	24	225	4	0.2	PBSS4021SP			
	7.5 / 6.3	NPN/PNP	300/250	0.5	2	15/24	150/225	4	0.2	PBSS4021SPN			
30	5.7	NPN/NPN	300	0.5	2	57	250	4	0.4	PBSS4032SN ³⁾			
	4.8	PNP/PNP	200	0.5	2	70	390	4	0.4	PBSS4032SP ³⁾			
	5.7 / 4.8	NPN/PNP	300/200	0.5	2	57/70	250/390	4	0.4	PBSS4032SPN ³⁾			
40	1.0	NPN/PNP	300/250	0.5	5	130/150	500	1	0.1		PBSS4140DPN		
	2.0	NPN/PNP	300/250	0.5	5	80/100	400/530	2	0.2		PBSS4240DPN		
50	2.7	2 x NPN	300	0.5	2	50	340	2.7	0.27	PBSS4350SS			
		2 x PNP	200	0.5	2	60	370	2.7	0.27	PBSS5350SS			
		NPN/PNP	300/200	0.5	2	50/60	340/370	2.7	0.27	PBSS4350SPN			
60	1.0	2 x NPN	200	0.5	5	115	250	1	0.1		PBSS4160DS		
		2 x PNP	150	0.5	5	120	330	1	0.1		PBSS5160DS		
		NPN/PNP	200/150	0.5	5	115/120	250/330	1	0.1		PBSS4160DPN		
	6.7	NPN/NPN	300	0.5	2	20	190	4	0.2	PBSS4041SN			
	5.9	PNP/PNP	200	0.5	2	35	330	4	0.2	PBSS4041SP			
	6.7 / 5.9	NPN/PNP	300/200	0.5	2	20/35	190/330	4	0.2	PBSS4041SPN			

¹⁾ I_C/I_B=20

²⁾ Device mounted on a ceramic PCB, Al₂O₃, standard footprint.

³⁾ Optimized for high speed switching

Low V_{CEsat} (BISS) transistors

High voltage low V_{CEsat} (BISS) transistors

types in **bold** represent new products

Package				SOT223 (SC-73)	SOT89 (SC-62)	SOT23
Size (mm)				6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.3 x 1.0
P _{tot} (mW)				1700	1300	250
Polarity	$V_{CESM}^{1)}$	V_{CEO} (V)	I_c (A)			
NPN	-	150	1	PBHV8115Z		PBHV8115T
			2	PBHV8215Z		
	500	180	1			PBHV8118T
		400	0.5	PBHV8540Z		PBHV8540T
		500	1	PBHV8140Z		
PNP	-	150	1	PBHV9115Z	PBHV9115X	PMBTA45
			2	PBHV9215Z		PBHV9115T
	500	400	0.25	PBHV9040Z		PBHV9040T
			0.5	PBHV9540Z		
		500	0.15			PBHV9050T
			0.25	PBHV9050Z		

¹⁾ Collector-emitter peak voltage

In the Spotlight

High voltage low V_{CEsat} (BISS) transistors in SOT223 & SOT23

Voltage V_{CEO} up to 500 V

Current I_c up to 1 A (continuous), 2 A (peak)

V_{CEsat} down to 33 mV at $I_B = 20$ mA

AEC-Q101 qualified








Low V_{CEsat} (BISS) RETs

Package					SOT23	
Size (mm)					2.9 x 1.3 x 1.0	
P _{tot} (mW)					250	
V_{CEO} (V)	I_c (mA)		R1 (kΩ)	R2 (kΩ)	NPN	PNP
40	600	R1 = R2	1	1	PBRN113ET	PBRP113ET
			2.2	2.2	PBRN123ET	PBRP123ET
		R1 ≠ R2	1	10	PBRN113ZT	PBRP113ZT
			2.2	10	PBRN123YT	PBRP123YT


High voltage bipolar transistors for lighting, SMPS and industrial applications

types in **bold** represent new products

V_{CESM} (V)	$I_{C(DC)}$ (max) (A)	25 °C ind. t_f (typ) (ns)	@ I_C (A)	h_{FE} (typ)	@ I_C (A)	SOT54 (TO92)	SOT78 (TO220AB)	SOT186A (isolated TO220AB)	SOT404 (D ² PAK)	SOT428 (DPAK)	
											
700	1	80	1	7.5	0.8	BUJ100LR					
	1	80	1	7.5	0.8	PHE13003A					
	1	50	1	14	0.75	BUJ100					
	1.5	100	0.5	9	1	PHE13003C					
	1.5	100	0.5	9	1	PHD13003C ¹⁾					
	4	30	2	12.5	3		BUJ103A	BUJ103AX		BUJ103AD	
	4	30	2	12.5	3					BUJD103AD ¹⁾	
	4	100	2	17	2			PHE13005	PHE13005X		
	4	100	2	17	2			PHD13005 ¹⁾			
	8	20	5	11	4			BUJ105A		BUJ105AB	BUJ105AD
	8	20	5	11	4						BUJD105AD ¹⁾
	8	40	5	9	5			PHE13007			
	10	20	5	11	6			BUJ106A			
	12	100	5	6 min - 30 max	8			PHE13009			
850	4	30	2	12.5	3			BUJD203A¹⁾	BUJD203AX¹⁾	BUJD203AD¹⁾	
1000	5	145	2.5	12	3			BUJ303A	BUJ303AX	BUJ303AD	
1050	4	520	2	41	0.8			BUJ302A	BUJ302AX	BUJ302AD	
	5	200	2.5	10.5	3			BUJ303B			
1200	6	170	2.5	15.5	3			BUJ403A			

¹⁾ Integrated freewheeling diode

Small-signal MOSFETs single (N-channel) < 50V


Package													SOT223 (SC-73)			
																
Size (mm)													6.5 x 3.5 x 1.65			
P _{tot} (mW)													1700			
V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th) min} (V)	V _{GS(th) max} (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	R _{DS(on)} typ (mΩ) @ V _{GS} =							
									10 V	4.5 V	2.5 V	1.8 V				
12	8	5.7	0.4	-	23	67	10.1	-	-	28	-	39				
20	8	tbd	tbd	tbd	tbd	tbd	tbd	-	-	16	tbd	tbd				
		6.3	2	4	23	71	10.6	-	-	23	-	37				
		5.7	0.4	-	23	71	10.6	-	-	27	-	39				
		tbd	tbd	tbd	tbd	tbd	tbd	tbd	-	-	28	tbd	tbd			
		5.7	0.45	-	20	66	7.4	-	-	30	-	44				
		3.76	0.65	-	35	84	5.4	-	-	56	77	-				
		2.5	0.65	-	35	84	5.4	-	-	56	77	-				
		1.05	0.4	-	6.5	65	-	-	-	140	-	240				
	12	12	2.28	0.45	0.95	14.5	23.5	0.89	-	-	250	-	420			
			1	0.45	1	14.5	23.5	0.89	-	-	280	-	460			
			tbd	tbd	tbd	tbd	tbd	tbd	tbd	-	-	30	tbd	-		
			5.9	0.5	1.5	25	37	5.8	-	-	31	44	-			
	15	15	2.15	0.5	1.5	16	17	0.72	-	-	270	440	-			
			1	0.5	1.5	16	17	0.72	-	-	290	460	-			
	30	8	5.7	1	2	24	35	13.1	-	28	34	-	-			
			4.1	1	2	24	35	13.1	-	55	70	-	-			
4.9			0.45	-	22	60	9.9	-	-	38	-	54				
4.9			0.45	-	18	50	9.3	-	-	40	-	55				
12		12	1.78	0.45	0.95	11.5	22.5	0.89	-	-	390	-	550			
			0.85	0.4	-	6	27	-	-	-	400 ²⁾	-	600 ²⁾			
			0.8	0.45	1	11.5	22.5	0.89	-	-	400	-	580			
			tbd	tbd	tbd	tbd	tbd	tbd	tbd	-	-	20	tbd	-		
20		12	tbd	tbd	tbd	tbd	tbd	tbd	-	-	250	tbd	-			
			1.87	0.5	1.5	16	19.5	0.65	-	-	350	520	-			
			0.87	0.35	-	16	19.5	-	-	-	370	550	-			
			0.9	0.5	-	16	19.5	0.65	-	-	370	550	-			
		15	15	5.4	1	2	12	27	13.8	-	32	40	-	-		
				tbd	tbd	tbd	tbd	tbd	tbd	tbd	-	tbd	15	tbd	-	
				tbd	tbd	tbd	tbd	tbd	tbd	tbd	-	tbd	18	tbd	-	
				10	1	2.8	18	44	24	-	20	30	-	-	BSP030	
20	20	tbd	tbd	tbd	tbd	tbd	tbd	-	tbd	31	tbd	-				
		tbd	tbd	tbd	tbd	tbd	tbd	tbd	-	tbd	35	tbd	-			
		5.4	1	2	33	44	6.1	-	31	38	-	-				
		5.2	1	2	33	44	6.1	-	32	42	-	-				
	20	20	5.4	1	2	12	21.5	9.4	-	35	45	-	-			
			4.6	1	2	8.4	17.8	8.8	-	40	49	-	-			
			4.7	1	2	12	23.5	9.4	-	47	60	-	-			
			1.9	1	2	11	41	6.4	-	77	102	-	-			
20	20	2.5	1.5	-	12	23.5	4.6	-	74	117	-	-				
		6	1	2.8	14	36	-	-	80	120	-	-	BSP100			
20	20	1.7	1.5	-	11.5	31	4.6	-	117 ²⁾	190 ²⁾	-	-				

¹⁾ Enhanced thermal capability

²⁾ Max values

* Products to be released in 2011. For new product information, please check <http://standardproducts.nxp.com/mosfets>

Small-signal MOSFETs single (N-channel) $\geq 50V$

Package													SOT223 (SC-73)	
														
													6.5 x 3.5 x 1.65	
Size (mm)													1700	
P _{tot} (mW)														
V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th) min} (V)	V _{GS(th) max} (V)	t _{on typ} (ns)	t _{off typ} (ns)	Q _{G typ} (nC)	ESD protection (kV)	R _{DSon typ} (mΩ) @ V _{GS} =					
									10 V	4.5 V	2.5 V	1.8 V		
50	20	0.1	0.4	1.8	2	5	-	-	2800	3800 ³⁾	-	-		
55	8	0.3	0.4	1.3	4	11	1	-	-	2300	2400	3100		
	10	0.335	0.4	1.3	4	11	1	-	-	2300	2400	3100		
	13	2.5	2	4	-	-	-	2	120	-	-	-	-	PHT6N06T
3.5		1	2	-	-	-	2	-	65	-	-	-	PHT8N06LT	
2.5		1	2	-	-	-	2	-	120	-	-	-	PHT6N06LT	
60	15	0.26	1	3.3	3	9	-	1	2800	3800	-	-		
	20	0.25	0.8	3	-	-	-	-	2500	-	-	-		
		0.36	0.9	1.5	5	13	0.72	-	900	1000	-	-		
		1.22	1	3	6	7.2	1.05	-	760	1100	-	-		
		0.57	1	-	6	7.2	-	-	780	1100	-	-		
		0.55	1	3	6	7.2	1.05	-	780	1100	-	-		
		0.3	1	2.5	7	15	0.6	-	1000	1300	-	-		
		0.3	1	2.5	11	19	0.5	2	1000	1300	-	-		
	0.3	1	2.5	16	60	1.09	3	1100	1300	-	-			
	30	0.34	1	-	3	9	-	1	2800	3800	-	-		
0.385		1	2.5	2.5	11	0.69	-	780	1200	-	-			
0.475		1	2.5	2.5	11	0.69	-	780	1200	-	-			
100	0.3	1	2.5	2.5	11	-	-	2800	3800	-	-			
	16	3.5	1	2	14	73	-	-	-	200	-	-	PHT4NQ10LT	
	20	3	2	4	-	-	-	-	57	-	-	-	-	PHT6NQ10T
		3.5	2	4	21	31	7.4	-	200	-	-	-	-	PHT4NQ10T
		0.85	2	4	19	13	4.6	-	400	-	-	-	-	
		0.15	1	2.8	3	12	-	-	3500	-	-	-	-	
		0.19	1	-	3	12	-	-	-	5000	-	-	-	
0.52	1	-	3	12	-	-	-	5000	-	-	-	BSP110		
30	1.9	2	4	10.5	12.5	7	-	213	-	-	-			
200	0.4	0.8	2.8	6	49	-	-	1600	-	-	-	-		
	0.55	0.4	2	10	45	-	-	1700	-	3000	-	-	BSP122	
240	20	0.375	0.8	2	6	47	-	-	2800	7500 ³⁾	-	-	BSP89	
250	20	0.35	0.8	2	6	47	-	-	2800	-	-	-	BSP126	
300	20	0.35	0.8	2	6	46	-	-	3700	-	4800	-	BSP130	

¹⁾ Enhanced thermal capability

²⁾ Max values

³⁾ @ V_{gs} = 5 V

Small-signal MOSFETs dual (N-channel)

Package													
Size (mm)													
P _{tot} (mW)													
V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th)} min (V)	V _{GS(th)} max (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	R _{DSon} typ (mΩ) @ V _{GS} =				
									10 V	4.5 V	2.5 V	1.8 V	
20	8	0.87	0.45	1	14.5	23.5	-	-	-	280	-	460	-
	12	0.86	0.5	1.5	16	17	0.72	-	-	290	460	-	-
30	8	0.71	0.45	1	11.5	22.5	0.89	-	-	400	-	580	-
	12	0.74	0.5	1.5	17	19.5	0.65	-	-	370	550	-	-
	15	0.125	0.8	1.5	17	22	0.35	-	-	1800	2900	-	-
60	20	0.49	1	-	6	7.2	1.05	-	-	780	1100	-	-
		0.36	0.9	1.5	5	13	0.72	-	-	900	1000	-	-
		0.3	1	2.5	7	15	0.6	-	-	1000	1300	-	-
		0.3	1	2.5	11	19	0.5	-	2	1000	1300	-	-

Small-signal MOSFETs single (P-channel)

Package													
Size (mm)													
P _{tot} (mW)													
V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th)} min (V)	V _{GS(th)} max (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	R _{DSon} typ (mΩ) @ V _{GS} =				
									10 V	4.5 V	2.5 V	1.8 V	
12	8	1.52	0.4	-	6.5	65	-	-	-	80	-	140	-
		0.75	0.4	-	6.5	65	-	-	-	180	-	420	-
20	8	tbd	tbd	tbd	tbd	tbd	tbd	-	-	-	21	tbd	tbd
		tbd	tbd	tbd	tbd	tbd	tbd	-	-	-	27	tbd	tbd
		2	0.5	1.1	7	50	6	-	-	-	100	-	-
		4.8	0.55	0.95	16	117	10	-	-	-	48	65	-
	12	3.5	0.75	1.25	24	84	8.5	-	-	-	48	71	-
		3.9	0.55	0.95	28	101	7.6	-	-	-	65	90	-
		3.5	0.75	1.25	tbd	tbd	tbd	-	-	-	85	tbd	tbd
		3.5	0.75	1.25	tbd	tbd	tbd	-	-	-	170	tbd	tbd
30	8	0.47	0.4	-	6.5	65	-	-	-	660	-	1100	
	20	3	1	2.8	20	50	-	-	220	330	-	-	
		0.52	1	-	6.5	65	-	-	630	890	-	-	
50	20	0.2	tbd	tbd	tbd	tbd	tbd	1	5300	6000	-	-	
		0.13	0.8	2	3	7	-	-	6000	-	-	-	
60	20	0.3	1	-	6.5	65	-	-	2100	2700	-	-	
200	20	0.225	0.8	2.8	5	20	-	-	10000	-	-	-	
240	20	0.2	0.8	2.8	5	20	-	-	10000	-	-	-	
250	20	0.225	0.8	2.8	5	10	-	-	10000	-	-	-	
300	20	0.21	1.95	2.8	5	15	-	-	17000 ²⁾	-	-	-	


¹⁾ Enhanced thermal capability

²⁾ Max values

* Products to be released in 2011. For new product information, please check <http://standardproducts.nxp.com/mosfets>




Small-signal MOSFET – Schottky combination

types in **bold** represent new products

Package														SOT1118		
																
Size (mm)														2.0 x 2.0 x 0.65		
P _{tot} (mW)														1250		
Configuration	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th) min} (V)	V _{GS(th) max} (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	I _F (A)	V _R (V)	V _F typ. (mA)	R _{DSon} typ (mΩ) @ V _{GS} =			
													4.5 V	2.5 V	1.8 V	
single + schottky	20	8	3.3	0.5	1.5	15	92	4.5	1	2	30	455	58	72	100	PMFPB6545UP
			3.3	0.5	1.5	15	92	4.5	1	2.2	30	325	58	72	100	PMFPB6532UP

Small-signal MOSFETs dual (P-channel)

types in **bold** represent new products


Package														SOT363 (SC-88)	SOT666 (SC-88)	SOT1118
																
Size (mm)														2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	2.0 x 2.0 x 0.65
P _{tot} (mW)														300	300	1250
V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th) min} (V)	V _{GS(th) max} (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	R _{DSon} typ (mΩ) @ V _{GS} =							
									10 V	4.5 V	2.5 V	1.8 V				
20	8	3.3	0.5	1.5	15	92	4.5	1	-	58	72	100				PMDPB65UP
50	20	0.2	tbd	tbd	tbd	tbd	tbd	1	5300	6000	-	-	BSS84AKS*	BSS84AKV*		

* Products to be released in 2011. For new product information, please check <http://standardproducts.nxp.com/mosfets>

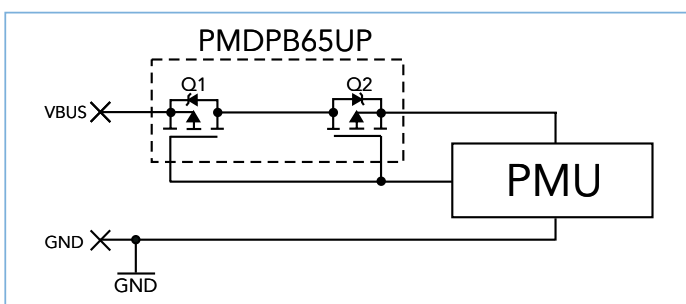
In the Spotlight

Dual P-channel ESD protected MOSFET in small 0.65 mm flat, 2 x 2 mm leadless package (PMDPB65UP)

- ESD protected MOSFET of >1 kV HBM
- Very low R_{DSon} of <70 mΩ at V_{GS} = 4.5 V
- 1.8 V R_{DSon} rating for operation at low voltage gate drive levels
- Best-in-class thermal performance due to extra heatsink
- Smallest 2 x 2 mm leadless package dual P-channel; 0.65 mm package height








USB OTG Vbus protection



30V N-channel MOSFETs





types in **bold** represent new products

Package	Typenumber	V_{DS} [max] (V)	R_{Dson} [max] @ $V_{GS} = 10$ V (m Ω)	R_{Dson} [max] @ $V_{GS} = 4.5$ V (m Ω)	I_D [max] (A)	$Q_{g(tot)}$ [typ] (nC)	
DPAK (SOT428)		PHD71NQ03LT	30	10	-	75	13.2
		PHD36N03LT	30	17	22	43.4	18.5
Power-SO8 (LFAK)		PSMN1R0-30YLC	30	1.15	1.4	100	50
		PSMN1R3-30YL	30	1.3	1.95	100	46.6
		PSMN1R5-30YL	30	1.5	1.9	100	36.2
		PSMN1R7-30YL	30	1.7	2.1	100	36.2
		PSMN2R0-30YL	30	2	2.63	100	30
		PSMN2R5-30YL	30	2.4	3.16	100	27
		PSMN3R0-30YL	30	3	4.04	100	21
		PSMN3R5-30YL	30	3.5	4.61	100	19
		PSMN4R0-30YL	30	4	5.25	100	17.6
		PSMN4R5-30YLC	30	4.8	6.1	84	9.6
		PSMN5R0-30YL	30	5	6.7	91	14.1
		PSMN6R0-30YL	30	6	7.87	79	11
		PSMN7R0-30YL	30	7	9.1	76	10
		PSMN9R0-30YL	30	8	11.03	61	8.7
QFN3333 (SOT873-1)		PSMN3R5-30LL	30	3.6	5.6	40	18
		PSMN3R8-30LL	30	3.7	5.8	40	38
		PSMN5R8-30LL	30	5.8	8	40	24
		PSMN9R0-30LL	30	9	13	21	20.6
		PSMN013-30LL	30	13	19	21	12.2
		PSMN017-30LL	30	17	25	15	10
SO8 (SOT96-1)		PHK12NQ03LT	30	-	14	11.8	-
		PSMN3R2-30KL	30	3.5	3.8	30	70.3
		PHK31NQ03LT	30	4.4	-	30.4	-
		PSMN005-30K	30	5.5	8	-	34
		PHK28NQ03LT	30	6.5	7.7	23.7	30.3
		PHK18NQ03LT	30	8.9	-	20.3	-
		SI4410DY	30	13.5	20	10	21.5
		PHK13N03LT	30	20	26	13.8	10.7
		PHKD13N03LT	30	20	26	10.4	10.7
		PHN203	30	30	55	6.3	14.6
		PHN210T	30	100	200	3.4	-
TO-220AB (SOT78)		PSMN1R6-30PL	30	1.7	2.1	100	101
		PSMN1R8-30PL	30	1.8	2.3	100	83
		PSMN2R0-30PL	30	2.1	2.8	100	55
		PSMN2R7-30PL	30	2.7	3.6	100	32
		PSMN3R4-30PL	30	3.4	4.1	100	31
		PSMN4R3-30PL	30	4.3	6.2	100	19
		PHP36N03LT	30	17	22	43.4	18.5
		PSMN022-30PL	30	22	34	30	4.4

For the most up to date product information, please visit <http://standardproducts.nxp.com/mosfets>

60V - 80V N-channel MOSFETs

types in **bold** represent new products

Package	Typenumber	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ $V_{GS} = 10$ V (m Ω)	I_D [max] (A)	$Q_{g(tot)}$ [typ] (nC)	
D ² PAK (SOT404)		PSMN004-60B	60	3.6	75	168
		PHB32N06LT	60	37	34	17
		PHB29N08T	75	-	27	19
		PSMN005-75B	75	5	75	165
		PSMN008-75B	75	8.5	75	122.8
		PHB110NQ08T	75	9	75	113.1
Power-SO8 (LFPACK)		PSMN5R5-60YS	60	5.2	100	56
		PSMN7R0-60YS	60	6.4	89	45
		PSMN8R5-60YS	60	8	76	39
		PSMN012-60YS	60	11.1	59	28.4
		PSMN017-60YS	60	15.7	44	20
		PSMN030-60YS	60	24.7	29	13
		PSMN8R2-80YS	80	8.5	82	55
		PSMN011-80YS	80	11	67	45
		PSMN013-80YS	80	12.9	60	37
		PSMN018-80YS	80	18	45	26
		PSMN026-80YS	80	27.5	34	20
QFN3333 (SOT873-1)		PSMN014-60LS	60	14	40	19.6
		PSMN023-80LS	80	23	34	21
TO-220AB (SOT78)		PSMN3R0-60PS	60	3	100	130
		PSMN4R6-60PS	60	4.6	100	70.8
		PSMN7R6-60PS	60	7.8	92	38.7
		PSMN015-60PS	60	14.8	50	20.9
		PHP29N08T	75	-	27	19
		PSMN008-75P	75	8.5	75	122.8
		PHP79NQ08LT	75	16	73	30
		PSMN4R4-80PS	80	4.1	100	112
		PSMN5R0-80PS	80	4.7	100	87
		PSMN6R5-80PS	80	6.9	100	71
		PSMN8R7-80PS	80	8.7	90	52
		PSMN012-80PS	80	11	74	36
		PSMN017-80PS	80	17	50	26
		PSMN050-80PS	80	46	22	9

For the most up to date product information, please visit <http://standardproducts.nxp.com/mosfets>

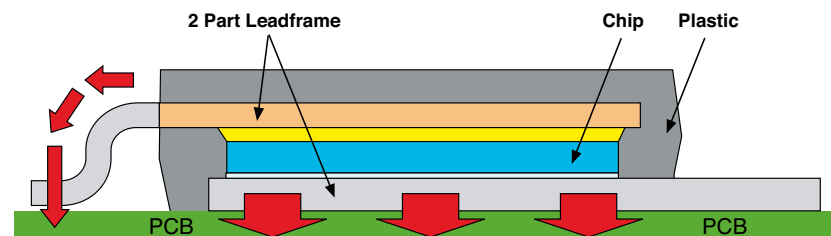
150V - 300V N-channel MOSFETs

Package	Typenumber	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ $V_{GS} = 10$ V (m Ω)	I_D [max] (A)	$Q_{g(tot)}$ [typ] (nC)
D ² PAK (SOT404)	PSMN030-150B	150	30	55.5	-
	PSMN035-150B	150	35	50	79
	PHB45NQ15T	150	42	45.1	32
	PSMN057-200B	200	57	39	-
	PSMN070-200B	200	70	35	-
	PHB33NQ20T	200	77	32.7	32.2
	PHB20NQ20T	200	130	20	-
DPAK (SOT428)	PSMN063-150D	150	63	29	55
	PSMN130-200D	200	130	20	-
	PHD9NQ20T	200	400	8.7	-
Power-SO8 (LFAK)	PSMN059-150Y	150	59	43	-
	PSMN102-200Y	200	102	21.5	-
QFN3333 (SOT873-1)	PML260SN	200	294	8.8	13.3
	PML340SN	220	386	7.3	13.2
SO8 (SOT96-1)	PHK5NQ15T	150	75	5	29
	PSMN085-150K	150	85	-	40
	PSMN165-200K	200	165	-	40
TO-220AB (SOT78)	PSMN030-150P	150	30	55.5	-
	PSMN035-150P	150	35	50	79
	PHP30NQ15T	150	63	29	55
	PHP28NQ15T	150	65	28.5	24
	PSMN057-200P	200	57	39	-
	PSMN070-200P	200	70	35	-
	PHP33NQ20T	200	77	32.7	32.2
	PHP20NQ20T	200	130	20	-
	PHP9NQ20T	200	400	8.7	-

For the most up to date product information, please visit <http://standardproducts.nxp.com/mosfets>

Power-SO8 (LFAK) Design









- ▶ Low Thermal resistance
- ▶ Low Electrical resistance
- ▶ Low Inductance



4-Quadrant Triacs

4-Quadrant Triacs

types in **bold** represent new products








$I_{T(RMS)}$ (A)	V_{DRM} (V)	I_{GT} (max) (mA)	SOT54 (TO92)	SOT78 (TO220AB)	SOT78D (internally insulated TO220AB)	SOT82	SOT186A (isolated TO220AB)	SOT223	SOT404 (D ² PAK)	SOT428 (DPAK)
										
0.6	400	5/5/5/7	MAC97A6							
	600	5/5/5/7	MAC97A8							
	400 / 600	5/5/5/7	BT1306-D							
0.8	400 / 600	5/5/5/7	BT1308-D					BT1308W-D		
	600	5/5/5/7	Z00607MA							
1	600	3/3/3/7						BT131W		
	600 / 800	3/3/3/7	BT131							
	600 / 800	5/5/5/7	BT131-D							
	600 / 800	10/10/10/10	BT131-E							
	600 / 800	3/3/3/5	Z0103MA/NA					Z0103MN/NN		
	600 / 800	5/5/5/7	Z0107MA/NA					Z0107MN/NN		
	600 / 800	10/10/10/10	Z0109MA/NA					Z0109MN/NN		
	600 / 800	3/3/3/5	Z0103MA0/NA0**					Z0103MN0/NN0**		
	600 / 800	5/5/5/7	Z0107MA0/NA0**					Z0107MN0/NN0**		
	600 / 800	10/10/10/10	Z0109MA0/NA0**					Z0109MN0/NN0**		
600	5/5/5/10	BT132-D*								
4	600	D/E/-/G				BT134				
	800	E/-				BT134				
	600	D/-		BT136			BT136X			BT136S
	600	F					BT136X			BT136S
	600 / 800	E		BT136			BT136X		BT136B	BT136S
	800	F								BT136S
	800	-					BT136X			BT136S
6	600	F/-/G					BT236X			
	800	-/G					BT236X			
8	600	D/-/G		BT137			BT137X			BT137S
	600	E		BT137			BT137X		BT137B	BT137S
	600	F					BT137X		BT137B	BT137S
	800	E		BT137			BT137X			BT137S
	800	F							BT137B	BT137S
	800	-		BT137			BT137X		BT137B	
	800	G							BT137B	BT137S
12	600	D		BT138			BT138X			
	600	-/G		BT138			BT138X		BT138B	
	600	F					BT138X		BT138B	
	600 / 800	E		BT138	BT138Y		BT138X		BT138B	
	800	F					BT138X			
	800	-		BT138			BT138X			
	800	G		BT138						

* Large chip / high I_{TSM}

** Enhanced immunity to false triggering


3-Quadrant Triacs

types in **bold** represent new products

$I_{T(RMS)}$ (A)	V_{DRM} (V)	I_{GT} (max) (mA)	SOT54 (TO92)	SOT78 (TO220AB)	SOT78D (internally insulated TO220AB)	SOT186A (isolated TO220AB)	SOT223	SOT404 (D ² PAK)	SOT428 (DPAK)
									
0.8	600 / 800	D/E	BTA2008						
1	600 / 800	B/E/ER	BTA201						
	600 / 800	E					BTA201W		
2	600 / 800	D/E				BTA202X			
4	600	B/C/D/E/F		BTA204		BTA204X			BTA204S
	800	B/C/E		BTA204		BTA204X			BTA204S
	1000	C				BTA204X			BTA204S
8	600	B/D/E/F		BTA208		BTA208X			BTA208S
	800	B/E		BTA208		BTA208X			BTA208S
	800	F		BTA208		BTA208X			BTA208S
	1000	B				BTA208X			
	1000	C				BTA208X		BTA208B	
	1000	5 min - 35 max				BTA208X-1000C0			
12	600	D		BTA312		BTA312X		BTA312B	
	600	CT		BTA312				BTA312B	
	600 / 800	B/C/E		BTA312		BTA312X		BTA312B	
	600 / 800	C			BTA312Y				
	800	ET		BTA312				BTA312B	
	600 / 800	B/C			BTA412Y				
16	600	BT/D		BTA316					
	600 / 800	B/C/E		BTA316		BTA316X		BTA316B	
	600 / 800	ET		BTA316					
	800	10 min - 50 max				BTA316X-800B0			
	600 / 800	B/C			BTA416Y				
25	600	BT		BTA225					
	600 / 800	B		BTA225				BTA225B	

* Large chip / high I_{TSM}
T: high T_{max} 150 °C

3-Quadrant Triacs part numbering



- Package identifier**
- = TO220AB (SOT78)
 - B** = D²PAK (SOT404)
 - S** = DPAK (SOT428)
 - W** = SOT223
 - X** = SOT186A (isolated TO220AB)
 - Y** = SOT78D (internally insulated TO220)
 - BTA2008, BTA201 use TO92 (SOT54) package
- Gate sensitivity I_{GTmax}**
- D** = 5, 5, 5 mA
 - E** = 10, 10, 10 mA
 - F** = 25, 25, 25 mA
 - C** = 35, 35, 35 mA
 - C0** = I_{GT} 5-35 mA
 - B** = 50, 50, 50 mA
- MSD849





Adjustable shunt voltage regulator TL431

types in **bold** represent new products





Package				SOT23	
Size (mm)				2.9 x 1.3 x 1.0	
P _{tot} (mW)				580	
Pinning configuration				Normal pinning*	Mirrored pinning*
V _{KA} (V)	I _K (mA)	V _{ref}	T _{amb} (°C)		
36	100	2%	0 to 70	TL431CDBZR ¹⁾	
			-40 to 85	TL431IDBZR ¹⁾	
			-40 to 125	TL431QDBZR ¹⁾	
				TL431FDT²⁾	TL431MFDT²⁾
			TL431SDT ³⁾	TL431MSDT ³⁾	
			1%	0 to 70	TL431ACDBZR ¹⁾
		-40 to 85		TL431AIDBZR ¹⁾	
		-40 to 125		TL431AQDBZR ¹⁾	
			TL431AFDT²⁾	TL431AMFDT²⁾	
		TL431ASDT ³⁾	TL431AMSDT ³⁾		
		0.5%	0 to 70	TL431BCDBZR ¹⁾	
			-40 to 85	TL431BIDBZR ¹⁾	
-40 to 125	TL431BQDBZR ¹⁾				
	TL431BFDT²⁾	TL431BMFDT²⁾			
TL431BSDT ³⁾	TL431BMSDT ³⁾				

¹⁾ Offers enhanced stability area and very low load capacity requirement²⁾ Offers higher ElectroMagnetic Interference (EMI) ruggedness, e.g. for Switch Mode Power Supply³⁾ Is designed for standard requirements and linear applications

* Normal pinning vs. mirrored pinning for TL431

	Pin	Symbol	Description	Simplified outline	Grafic symbol
Normal pinning	1	k	cathode		REF a 
	2	REF	reference		
	3	a	anode		
Mirrored pinning	1	REF	reference		REF a 
	2	k	cathode		
	3	a	anode		

Discrete voltage regulator

					SOT223 (SC-73)	SOT457 (SC-74)
Package						
Size (mm)					6.5 x 3.5 x 1.65	2.9 x 1.5 x 1.0
P _{tot} (mW)					1300	380
Zener diode		Transistor				
V _{out} (V)	V _Z min - V _Z max (V) @ I _Z = 5 mA	V _{CEO} (V)	I _C (A)	h _{FE} min @ I _C = 100 mA		
2.5	3.23 - 3.37	45	0.1	160	PVR100AZ-B2V5	PVR100AD-B2V5
3.0	3.53 - 3.67	45	0.1	160	PVR100AZ-B3V0	PVR100AD-B3V0
3.3	3.82 - 3.98	45	0.1	160	PVR100AZ-B3V3	PVR100AD-B3V3
5.0	5.49 - 5.71	45	0.1	160	PVR100AZ-B5V0	PVR100AD-B5V0
12.3	12.7 - 13.3	45	0.1	160	PVR100AZ-B12V	PVR100AD-B12V

Key features

- ▶ A bipolar transistor and an integrated Zener diode, internally connected to build a voltage regulator
- ▶ Output voltage options V_{out}: 2.5 V, 3 V, 3.3 V, 5 V and 12 V

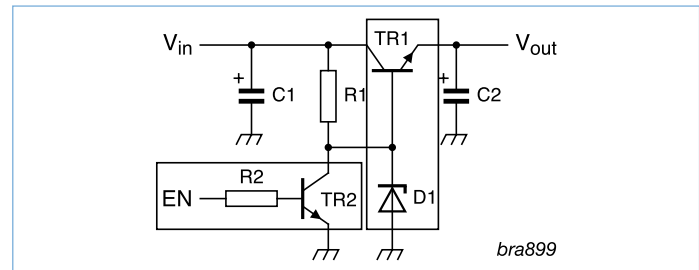
Key benefits

- ▶ Component count reduction
- ▶ Board space reduction
- ▶ Improved reliability


Key applications

- ▶ Linear voltage regulation

Discrete voltage regulator. PVR-series already include TR1 and D1, internally connected to build a voltage regulator. A resistor-equipped transistor (RET) adds an output enable function.



Constant current source

SOT353 (SC-88A)							
Package							
Size (mm)	2.0 x 1.25 x 0.95						
P _{tot} (mW)	335						
Type	PSSI2021SAY						
Description	maximum supply voltage	maximum supply current	typical stabilized output current	minimum stabilized output current	maximum stabilized output current	typical load stability of stabilized output current	typical output current change over ambient temperature
Parameter	V _S max (V)	I _S max (mA)	I _{out} typ (μA)	I _{out} min (mA)	I _{out} max (mA)	ΔI _{out} /I _{out} typ (%)	ΔI _{out} /I _{out} (ΔT _{amb}) ⁻¹ typ (%/K)
Condition		@ V _S = 12 V; I _{out} = 15 μA; V _{out} = 1 V to 10 V	@ V _S = 12 V; V _{out} = 1 V to 10 V; R _{ext} = open			@ V _S = 12 V; V _{out} = 1 V to 10 V	@ V _S = 12 V; V _{out} = 1 V; T _{amb} = -55 °C to 150 °C
Value	75	2.2	15	0.015	50	0.5	0.15

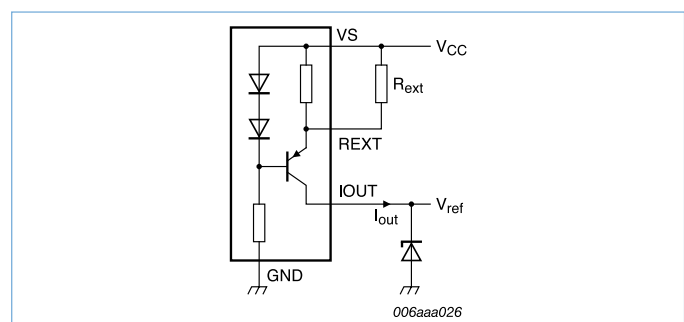
Key features and benefits

- ▶ Single-chip constant current source with reduced component count
- ▶ Output current set by an external resistor
- ▶ Very small footprint package for smaller designs

Key applications


- ▶ Constant current LED driver
- ▶ Generic constant current source
- ▶ Active bias control for audio amplifiers

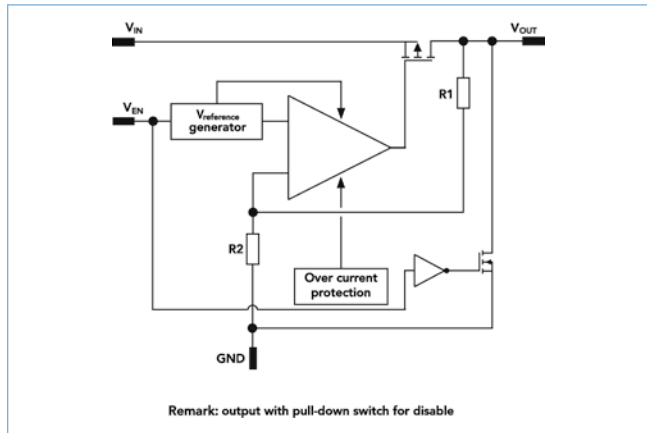
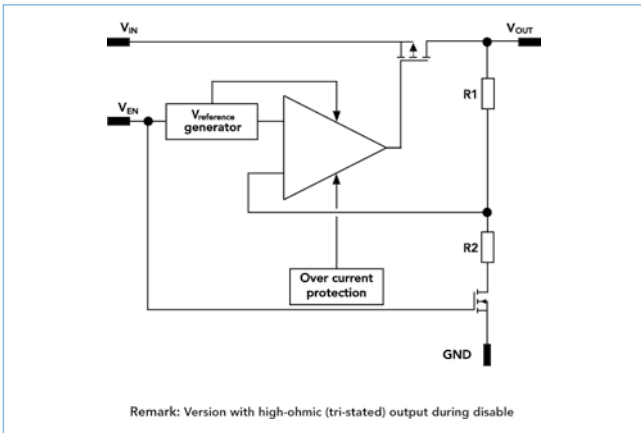
Voltage reference



LD6805 Ultra low-dropout voltage regulators – 150 mA

types in **bold** represent new products

Package							SOT1194	
								
Size (mm)							1.0 x 1.0 x 0.55	
P _{tot} @ °C							400	
V _{in} (V)	I _{out} typ (mA)	Quiescent current (µA)	V _{out} drop @ 150 mA (mV)	output noise µVrms (typ)	PSRR @ 1 kHz dB	Output voltage (V)	V _{OUT,nom}	
							LD6805K/vvH High ohmic output stage	LD6805K/vvP Pull down output stage
2.3 - 5.5	150	35	250	50	75	1.2	LD6805K/12H	LD6805K/12P
						1.4	LD6805K/14H	LD6805K/14P
						1.6	LD6805K/16H	LD6805K/16P
						1.7	LD6805K/17H	LD6805K/17P
						1.8	LD6805K/18H	LD6805K/18P
						2.2	LD6805K/22H	LD6805K/22P
						2.3	LD6805K/23H	LD6805K/23P
						2.5	LD6805K/25H	LD6805K/25P
						2.8	LD6805K/28H	LD6805K/28P
						2.9	LD6805K/29H	LD6805K/29P
						3.0	LD6805K/30H	LD6805K/30P
						3.3	LD6805K/33H	LD6805K/33P
						3.6	LD6805K/36H	LD6805K/36P



Key features

- ▶ High power supply ripple rejection (PSRR)
- ▶ Ultra low-dropout voltage and low noise
- ▶ Very small package size





























Key benefits

- ▶ No additional noise bypass capacitor needed
- ▶ Very low-dropout voltage for extended battery usage
- ▶ Lower power dissipation






















Key applications

- ▶ Mobile phone handsets, cordless telephones, personal digital devices (applications requiring component miniaturization)

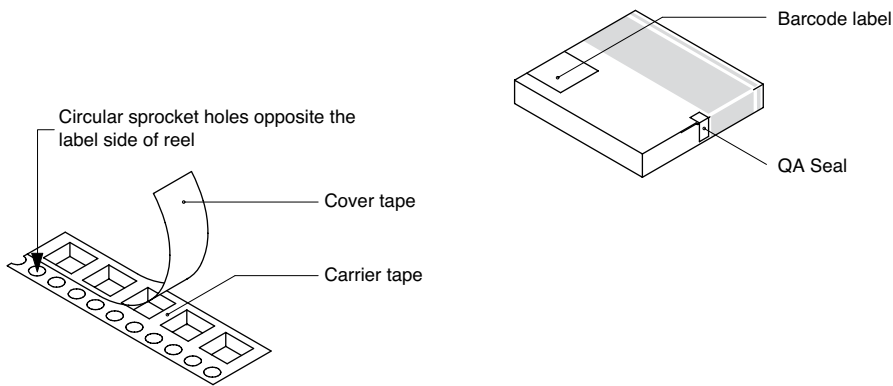
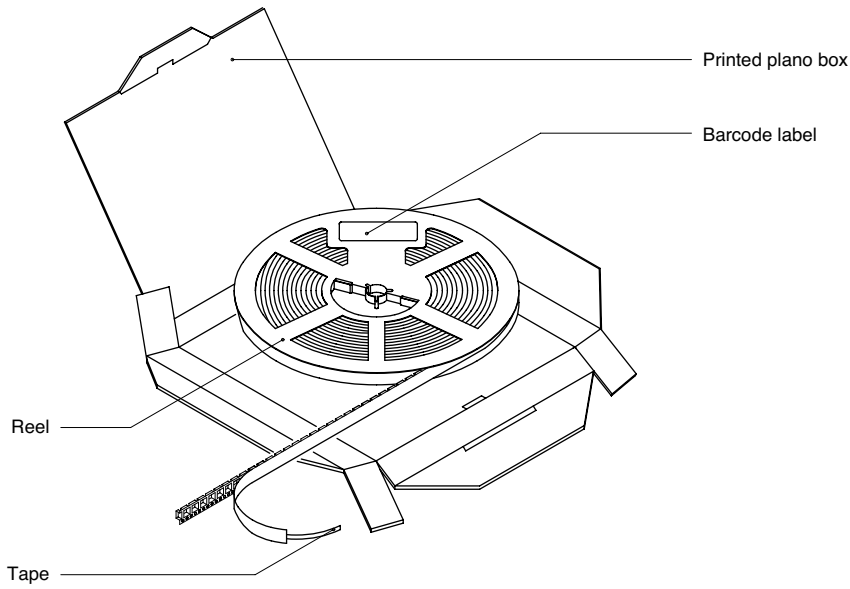
Package cross reference

Pins / leads	NXP	Industry standard names	Size (l x w x h) (mm)	P _{tot} (mW)	Package	Competitor synonyms								
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	KEC	Vishay	Semtech
2	SOD27	DO-35	4.25 x 1.85 x 0.56	500		GSD			DO-35		DO-35		DO-204AH	
	SOD66	DO-41	4.8 x 2.6 x 0.81	1300		GSR	DO-41				DO-41		DO-204AL	
	SOD68	DO-34	3.04 x 1.6 x 0.55	500		MSD								
	SOD80C	MiniMelf	3.5 x 1.5 x 1.5	300		LLDS			LLD		MiniMELF		MiniMELF	
	SOD123F	-	2.6 x 1.6 x 1.1	830		PMDU	S-Flat	SOD-123-FL			PowerDI123	SMF		
	SOD123W	-	2.6 x 1.7 x 1.0	900			S-Flat	SOD-123-FL			PowerDI123			
	SOD128	-	3.8 x 2.5 x 1.0	1000		PMDT	M-Flat							
	SOD323	SC-76	1.7 x 1.25 x 0.95	400			USC	SOD-323	URP	SOD323	SOD-323	USC	SOD323	
	SOD323F	SC-90	1.7 x 1.25 x 0.7	830		UMD2	US-Flat				PowerDI323			
	SOD523	SC-79	1.2 x 0.8 x 0.6	500		EMD2	ESC/TESC	SOD-523	UFP	SC79		ESC	SOD523	
	SOD882	-	1.0 x 0.6 x 0.5	250			CTS2			TSLP-2	DFN1006-2			
	SOD882D	-	1.0 x 0.6 x 0.37	250						TSLP-2-7	DFN1006H4-2			
3	SOT1061	HUSON3	2.0 x 2.0 x 0.65	1300				WDFN3			DFN2020-3		PowerPAK SC706L	
	SOT23	-	2.9 x 1.3 x 1.0	250		SSD3/SST3		SOT-23		SOT23	SOT-23	SOT-23	SOT23	
	SOT323	SC-70	2.0 x 1.25 x 0.95	200		UMD3/UMT3	USM	SC-70	CMAK/CM-PAK	SOT323	SOT-323	USM	SC-70 3 leads	
	SOT416	SC-75	1.6 x 0.8 x 0.77	150		EMD3/EMT3	SSM	SC-75	SMPAK	SC75			SC-75A	
	SOT883	SC-101	1.0 x 0.6 x 0.5	250			SS CSP2			TSLP-3-1	DFN1006-3			
	SOT89	SC-62	4.5 x 2.5 x 1.5	1300		MPT3	PW-Mini	SOT-89	UPAK (SOT89)	SOT89		SOT-89		
4	SOT143B	-	2.9 x 1.3 x 1.0	250			CP4		MPAK-4R	SOT143	SOT-143			
	SOT223	SC-73	6.5 x 3.5 x 1.65	1700				SOT-223		SOT223	SOT-223	SOT-223	SOT223	
5	SOT353	SC-88A	2.0 x 1.25 x 0.95	300		UMD5/UMT5	USV	SC-88A	CMPAK-5(T)			USV	SOT353	
	SOT665	-	1.6 x 1.2 x 0.55	300		EMD5/EMT5	ESV	SOT-553	VSON-5			TESV		
6	SOT363	SC-88	2.0 x 1.25 x 0.95	300		UMD6/UMT6	US6	SC-88	CMPAK-6	SOT363	SOT-363	US6	SOT363	
	SOT457	SC-74	2.9 x 1.5 x 1.0	750		SMD6/SMT6	SM6	SC-74	TSOP-6	SC74		TSOP6	TSOP-6	
	SOT666	-	1.6 x 1.2 x 0.55	300		EMD6/EMT6	ES6	SOT-563	SMFPAK-6	SOT666	SOT563	TES6	SC89-6lead	
	SOT1118	-	2.0 x 2.0 x 0.65	1300				6 Lead DFN			DFN2020B-6			
	SOT886	XSON6	1.45 x 1.0 x 0.5	250										SLP1510N6
	SOT891	XSON6	1.0 x 1.0 x 0.5	-				CS6						

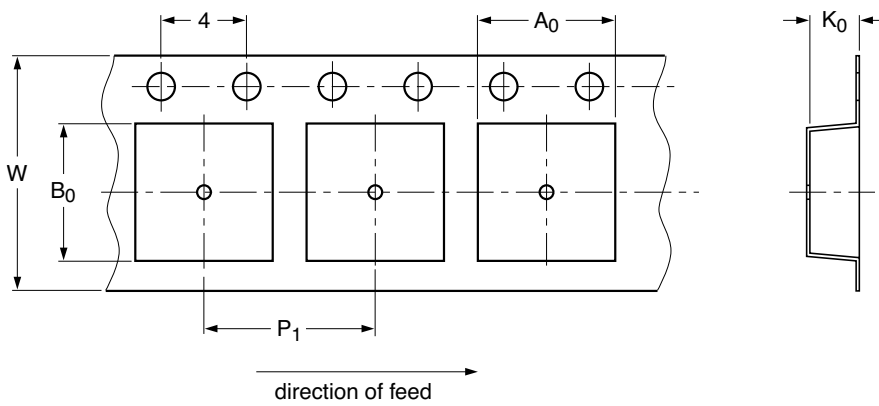
Packing methods SMD

Pins / leads	Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Taping	Package	Packing quantity and ordering code (12 NC ending)								
						800	1000	2500	3000	4000	8000	9000	10000	
2	SOD80C	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-115	-	-	-	-	-	
		4 mm pitch, 8 mm tape and reel	330 x 8	-		-	-	-	-	-	-	-	-135	
	SOD123F	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-115	-	-	-	-	
	SOD123W	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-115	-	-	-	-	
	SOD128	4 mm pitch, 12 mm tape and reel	180 x 12	-		-	-	-	-115	-	-	-	-	
	SOD323	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-115	-	-	-	-	
		4 mm pitch, 8 mm tape and reel	286 x 8	-		-	-	-	-	-	-	-	-135	
	SOD323F	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-115	-	-	-	-	
	SOD523	2 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-	-	-	-315	-	-
		4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-115	-	-	-	-	
		4 mm pitch, 8 mm tape and reel	286 x 8	-		-	-	-	-	-	-	-	-	-135
	SOD882	2 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-	-	-	-	-315	
	SOD882D	2 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-	-	-	-	-315	
	SOD962	2 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-	-	-	-	-315	-
3	SOT23	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-215	-	-	-	-	
		4 mm pitch, 8 mm tape and reel	286 x 8	-		-	-	-	-	-	-	-	-235	
	SOT89	8 mm pitch, 12 mm tape and reel	180 x 12	T1		-	-115	-	-	-	-	-	-	
		8 mm pitch, 12 mm tape and reel	330 x 12	T1		-	-	-	-	-135	-	-	-	
		8 mm pitch, 12 mm tape and reel	180 x 12	T3		-	-146	-	-	-	-	-	-	
		8 mm pitch, 12 mm tape and reel	180 x 12	T4		-	-147	-	-	-	-	-	-	
	SOT323	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-115	-	-	-	-	
		4 mm pitch, 8 mm tape and reel	286 x 8	-		-	-	-	-	-	-	-	-135	
	SOT404	16 mm pitch, 24 mm tape and reel	330 x 24	-		-118	-	-	-	-	-	-	-	
	SOT416	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-115	-	-	-	-	
		4 mm pitch, 8 mm tape and reel	286 x 8	-		-	-	-	-	-	-	-	-135	
	SOT428	8 mm pitch, 16 mm tape and reel	330 x 16	-		-	-	-118	-	-	-	-	-	
	SOT663	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-	-115	-	-	-	
	SOT883	2 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-	-	-	-	-315	
SOT1061	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-115	-	-	-	-		
4	SOT143B	4 mm pitch, 8 mm tape and reel	180 x 8	-		-	-	-	-215	-	-	-	-	
		4 mm pitch, 8 mm tape and reel	286 x 8	-		-	-	-	-	-	-	-	-235	
	SOT223	8 mm pitch, 12 mm tape and reel	180 x 12	-		-	-115	-	-	-	-	-	-	
		8 mm pitch, 12 mm tape and reel	330 x 12	-		-	-	-	-	-135	-	-	-	

Tape and reel pack for SMD packages



Carrier tape - tape and reel

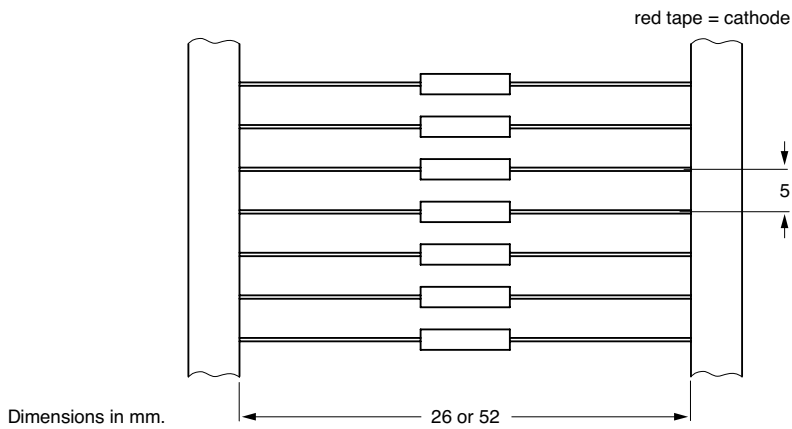
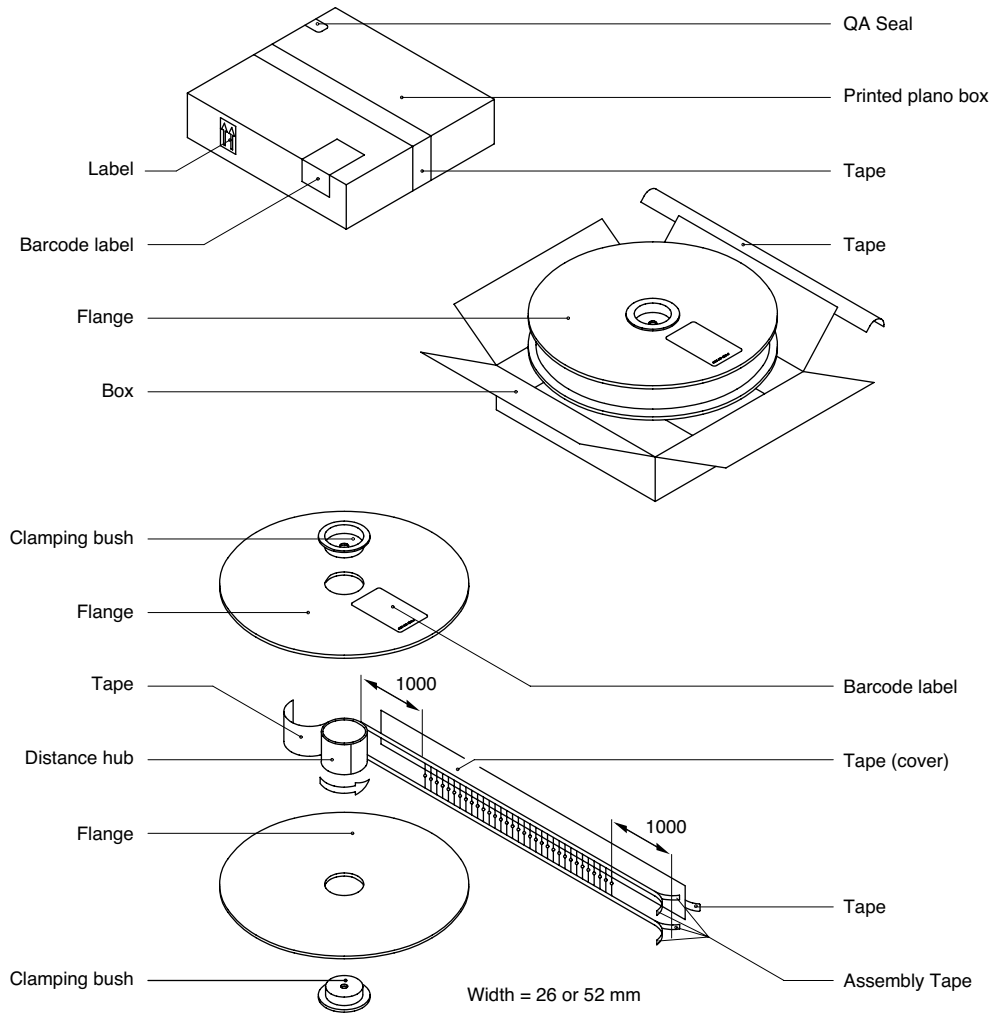


P_1 = pitch (see table packing methods)

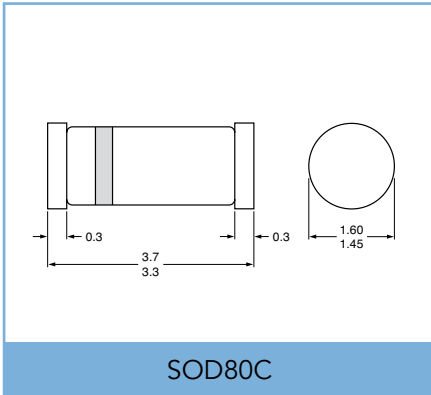
W = tape width (see table packing methods)

Compartment width (A_0), length (B_0) and depth (K_0) depending on package

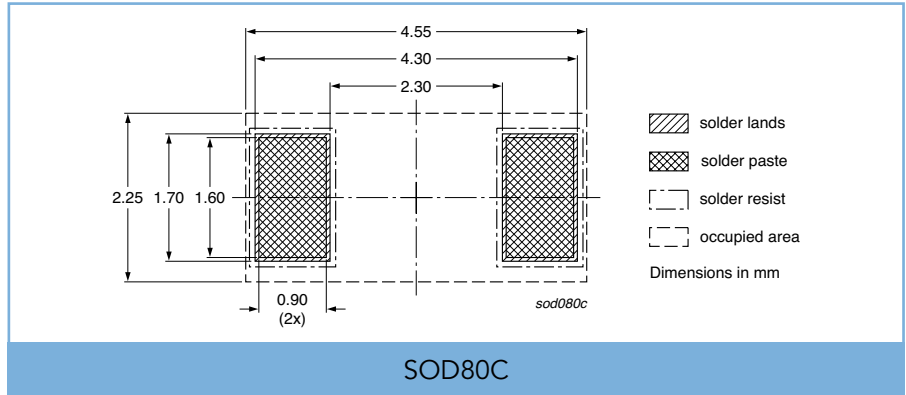
Reel pack axial tape for glass diodes



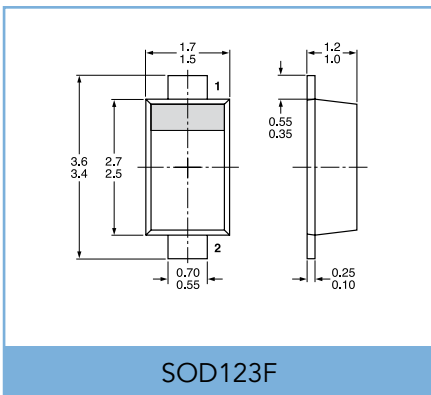
2-Pin SMD Packages



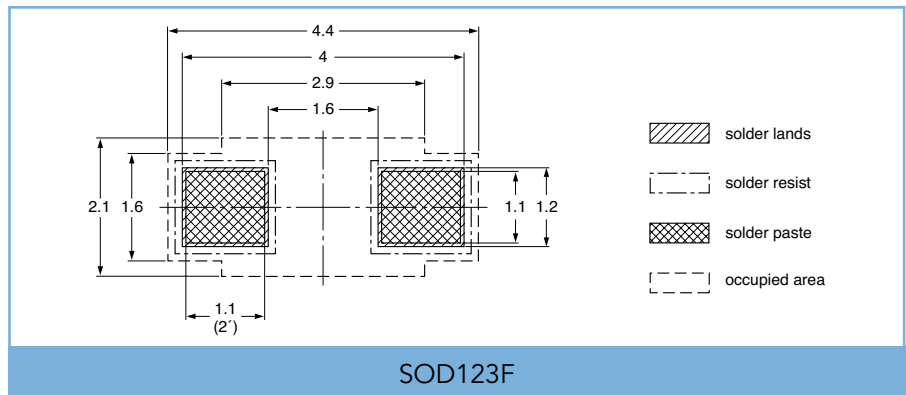
SOD80C



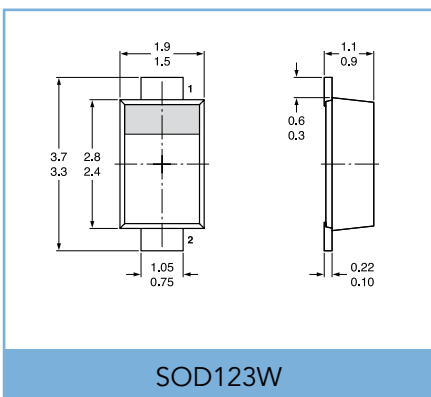
SOD80C



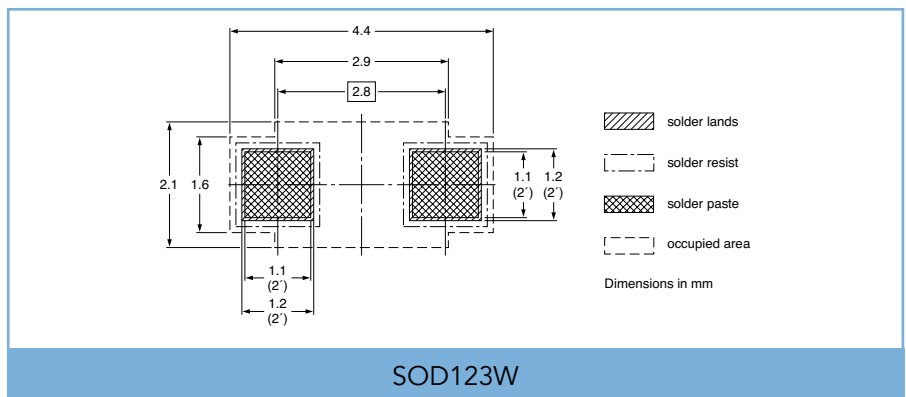
SOD123F



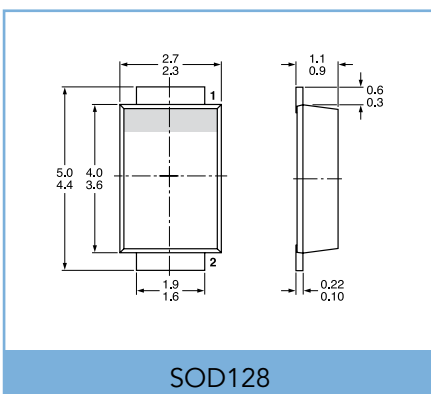
SOD123F



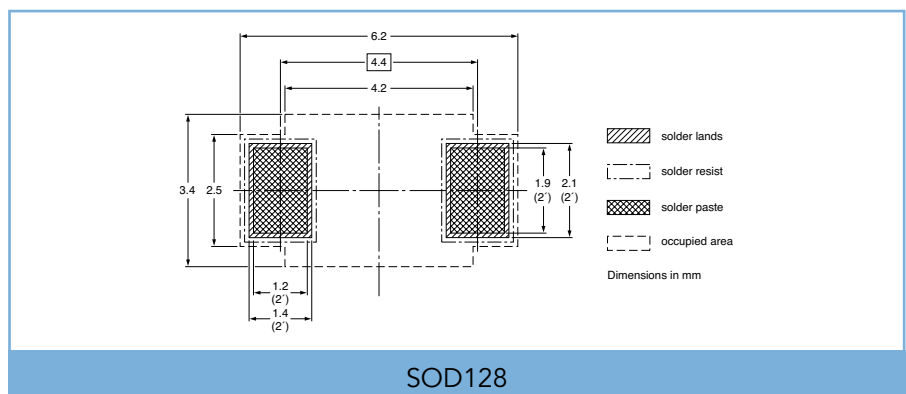
SOD123W



SOD123W



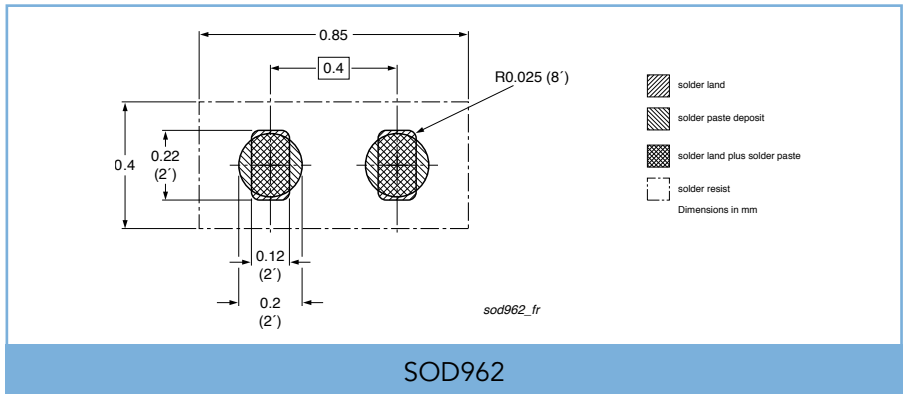
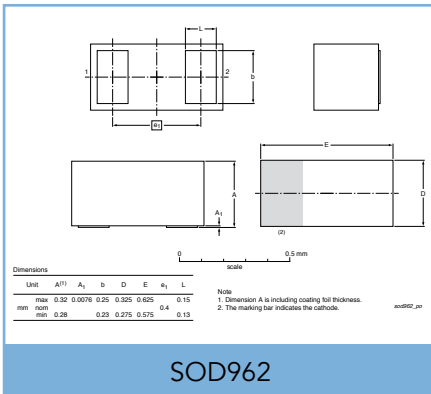
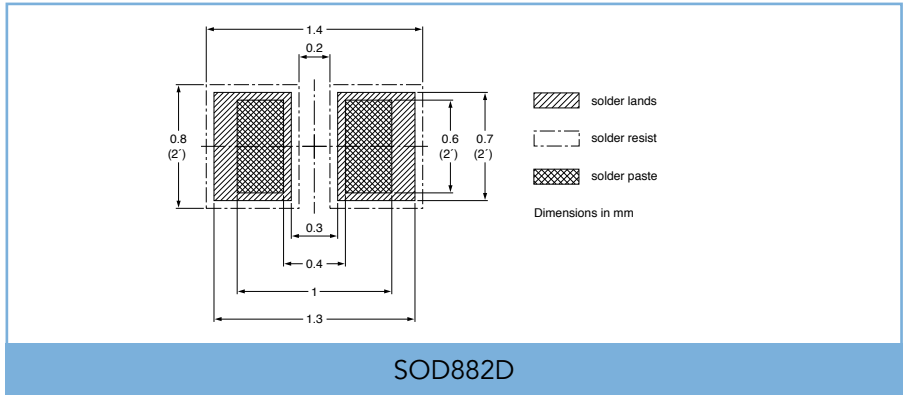
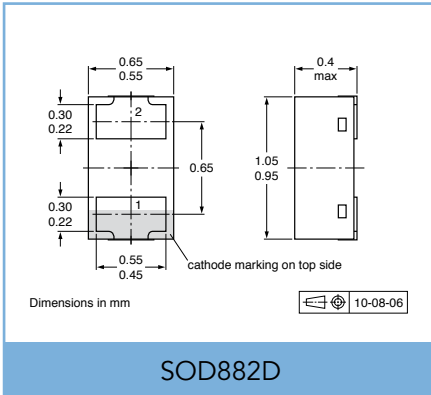
SOD128



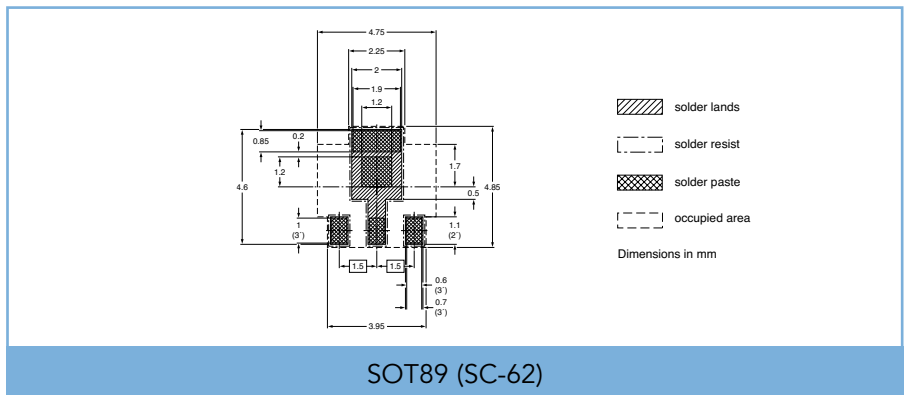
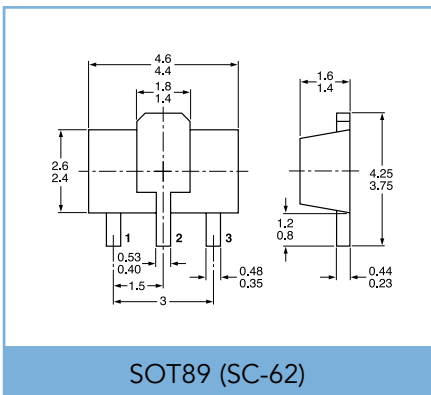
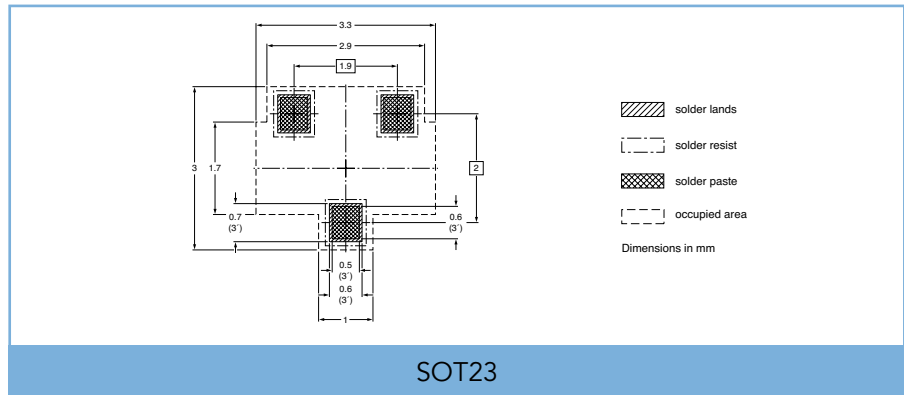
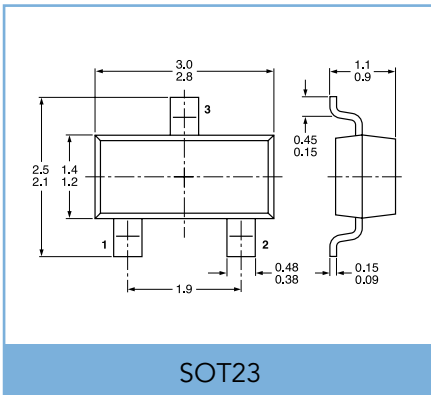
SOD128

Dimensions in mm

Minimized outline drawings and reflow soldering footprint

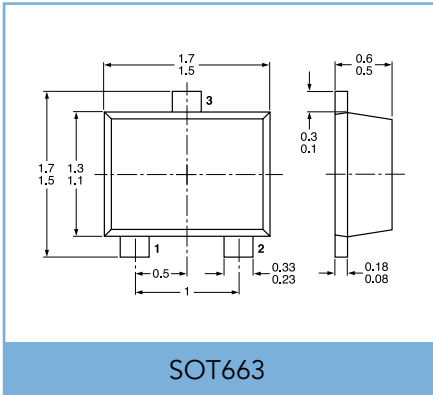


3-Pin SMD Packages

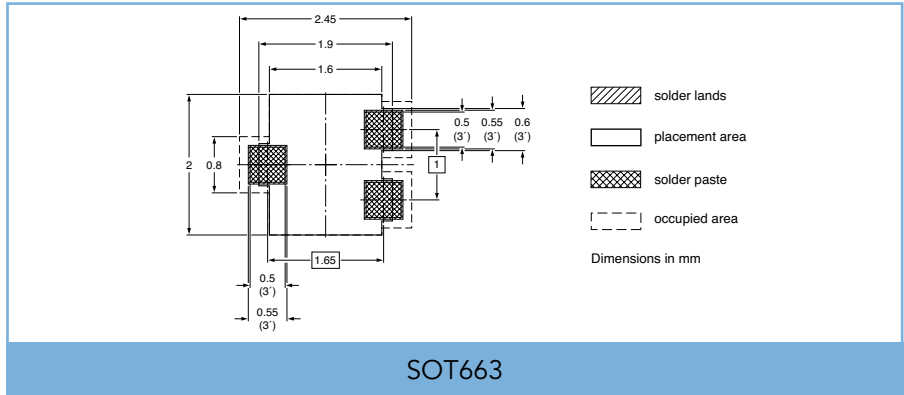


Dimensions in mm

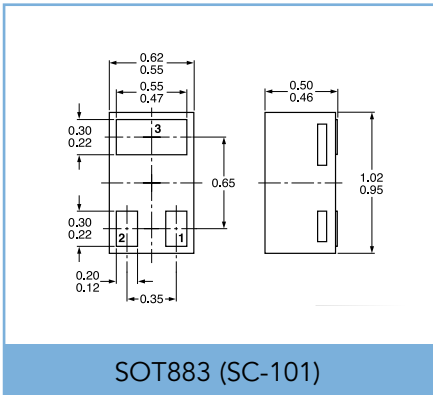
Minimized outline drawings and reflow soldering footprint



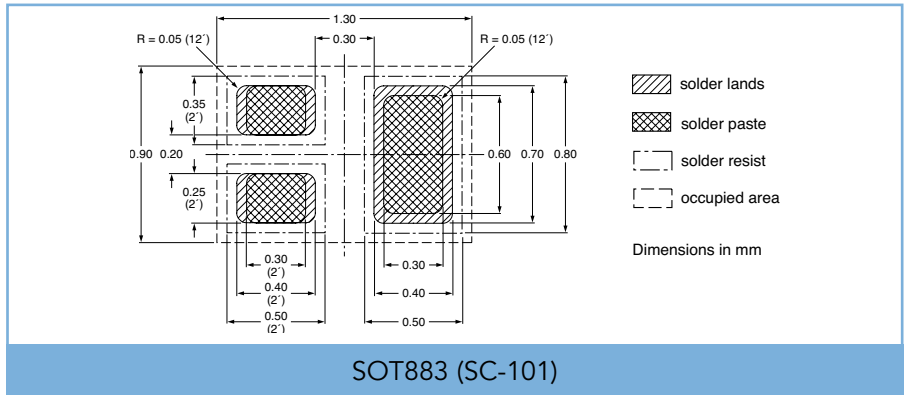
SOT663



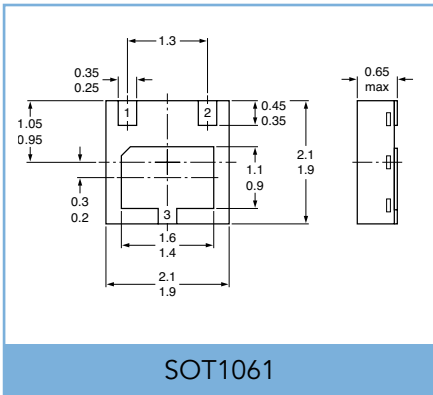
SOT663



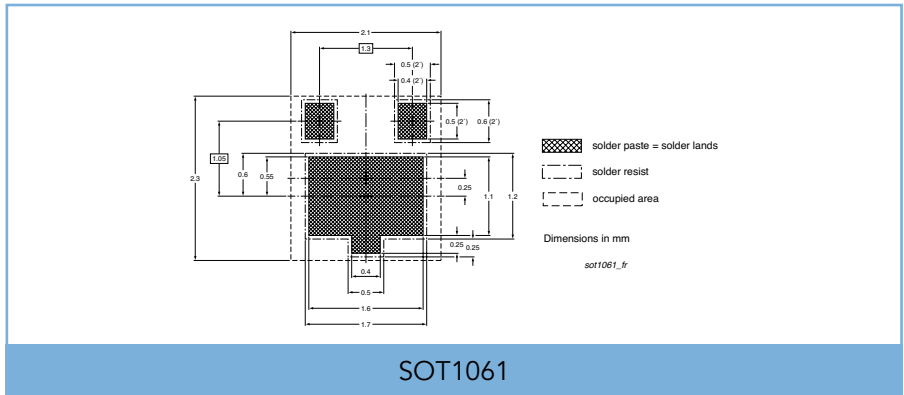
SOT883 (SC-101)



SOT883 (SC-101)

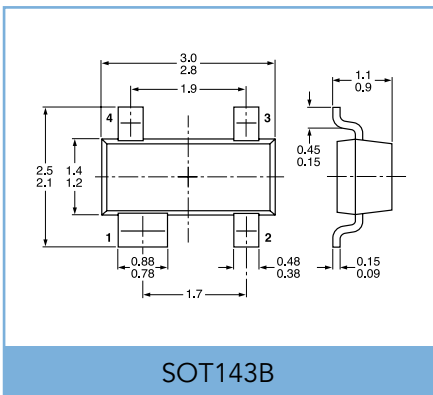


SOT1061

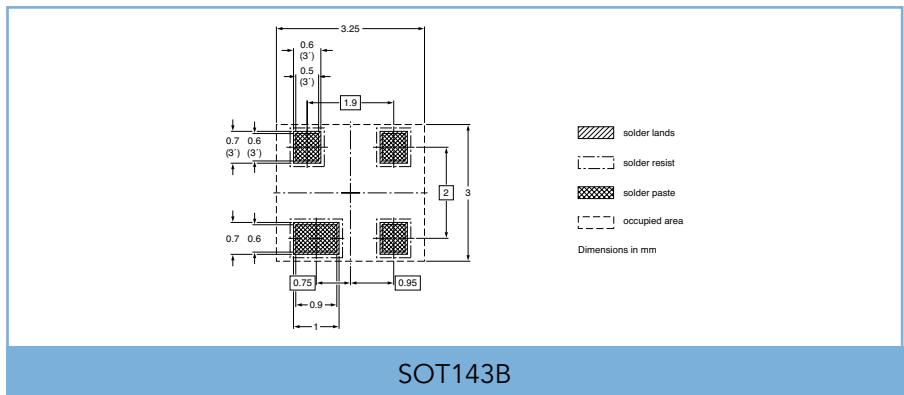


SOT1061

4-/5-Pin SMD Packages



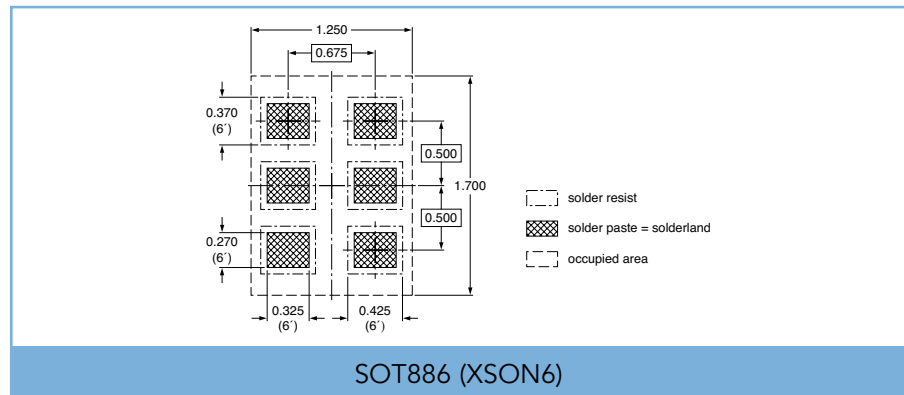
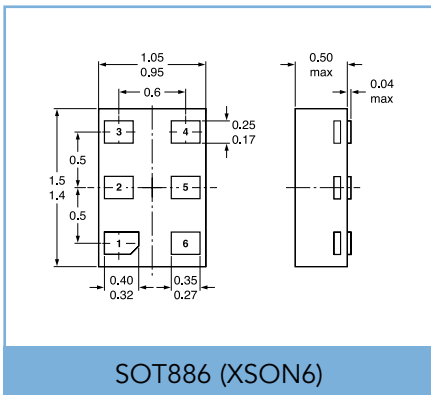
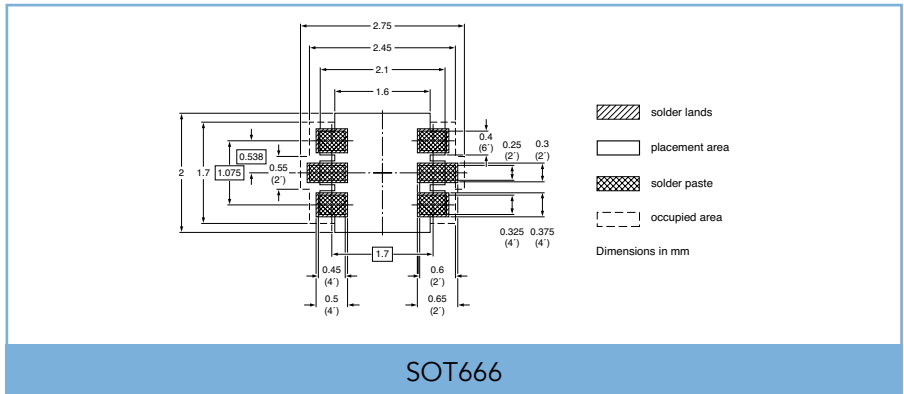
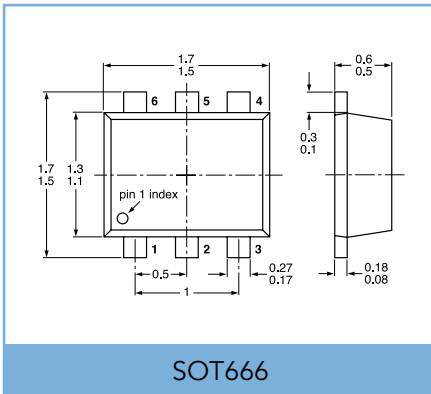
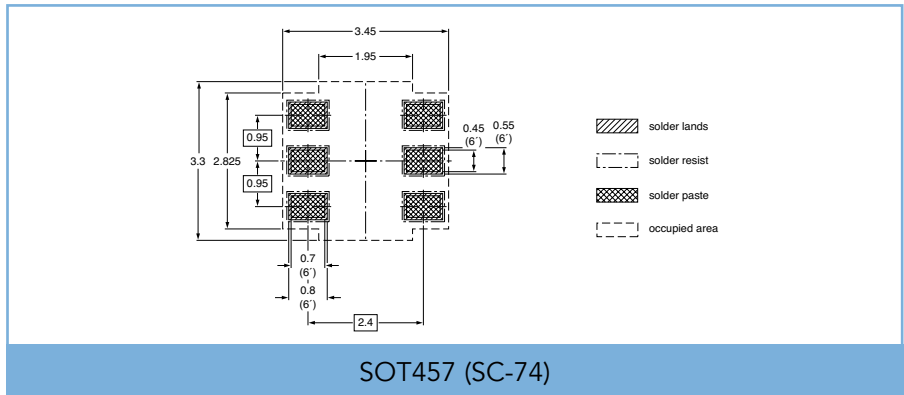
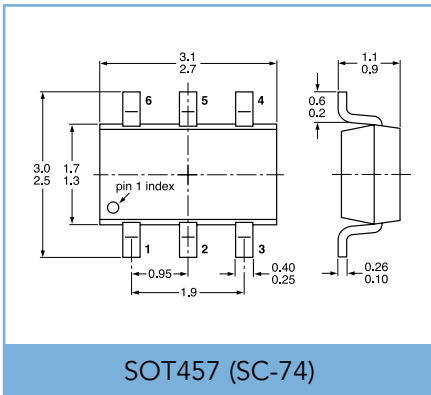
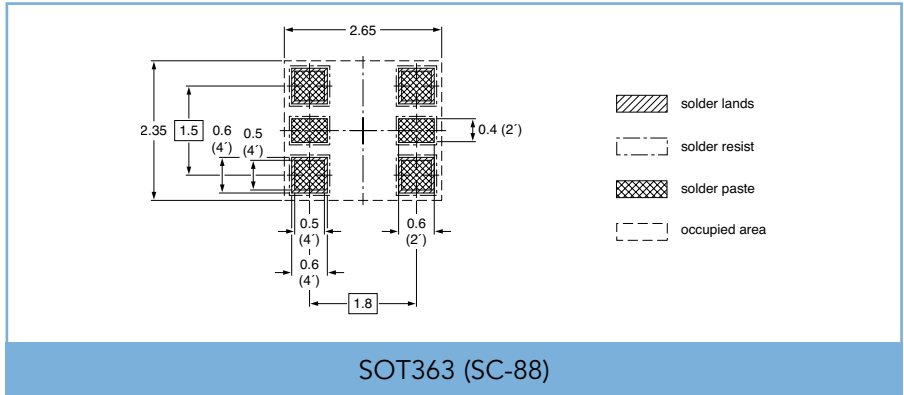
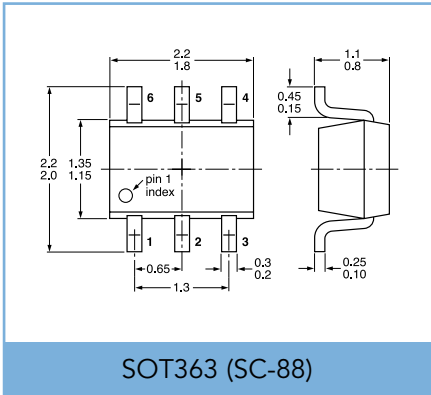
SOT143B



SOT143B

Dimensions in mm

6-Pin SMD Packages



Dimensions in mm

DIMENSIONS (mm are the original dimensions)

UNIT	A	b	b ₁	c	D	d	E	e	e ₁	L	L ₁ ⁽¹⁾ max.
mm	5.2	0.48	0.66	0.45	4.8	1.7	4.2	2.54	1.27	14.5	12.7
	5.0	0.40	0.55	0.38	4.4	1.4	3.6				2.5

Note
1. Terminal dimensions within this zone are uncontrolled to allow for flow of plastic and terminal irregularities.

SOT54

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁	b	b ₁ ⁽²⁾	b ₂ ⁽²⁾	c	D	D ₁	E	e	L	L ₁ ⁽¹⁾	L ₂ ⁽¹⁾ max.	p	q	Q
mm	4.7	1.40	0.9	1.6	1.3	0.7	16.0	6.6	10.3	2.54	15.0	3.30	3.0	3.8	3.0	2.6
	4.1	1.25	0.6	1.0	1.0	0.4	15.2	5.9	9.7		12.8	2.79	3.0	3.5	2.7	2.2

Notes
1. Lead shoulder designs may vary.
2. Dimension includes excess dambar.

SOT78

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁	b	b ₁	b ₂	c	D	D ₁ ref.	E	e	L	L ₁ ref.	p	Q	q	w
mm	4.7	1.40	0.9	1.4	1.72	0.6	16.0	6.5	10.3	2.54	14.0	3.0	3.7	2.6	3.0	2.6
	4.3	1.25	0.6	1.1	1.32	0.4	15.2		9.7		12.8		3.5	2.2	2.7	0.2

SOT78D

DIMENSIONS (mm are the original dimensions)

UNIT	A	b	c	D	E	e	e ₁	L	L ₁ ⁽¹⁾ max.	P	Q	q	w
mm	2.8	0.88	0.58	11.1	7.8	2.29	4.58	16.5	2.54	3.1	1.5	3.9	0.254
	2.3	0.65	0.47	10.5	7.2			15.3		2.5	0.9	3.5	

Note
1. Terminal dimensions within this zone are uncontrolled to allow for body and terminal irregularities.

SOT82

Index

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
1N4148	16	2PD601BSL	52	BAS70-05	8	BAT960	11	BC850C	54
1N4531	16	2PD602AQL	52	BAS70-05W	9	BAV103	18	BC850CW	54
1N47xxA series	14	2PD602ARL	52	BAS70-06	8	BAV170	19	BC856 / A / B	52
1PS66SB17	9	2PD602ASL	52	BAS70-06W	9	BAV199	19	BC856BS	53
1PS66SB82	9	ACT102H	89	BAS70-07	8	BAV199W	19	BC856S	53
1PS70SB20	11	ACT108	89	BAS70-07S	9	BAV20	18	BC856T / AT / BT	52
1PS70SB82	9	ACT108W	89	BAS70-07V	9	BAV21	18	BC856W / AW / BW	52
1PS70SB84	9	BAL74	16	BAS70H	9	BAV23	18	BC857 / A / B / C	52
1PS70SB85	9	BAL99	16	BAS70L	9	BAV23A	18	BC857AM / BM / CM	52
1PS70SB86	9	BAS101	18	BAS70VV	9	BAV23C	18	BC857BS	53
1PS74SB23	10	BAS101S	18	BAS70W	9	BAV23S	18	BC857BV	53
1PS75SB45	9	BAS116	19	BAS70XY	9	BAV70	16	BC857T / AT / BT / CT	52
1PS76SB10	9	BAS116H	19	BAS716	19	BAV70M	17	BC857W / AW / BW / CW	52
1PS76SB17	9	BAS116T	19	BAS85	8	BAV70S	17	BC858B	52
1PS76SB21	9	BAS16	16	BAS86	8	BAV70T	17	BC858W	52
1PS76SB40	9	BAS16H	16	BAT120A	12	BAV70W	17	BC859B	54
1PS76SB70	9	BAS16J	17	BAT120C	12	BAV74	16	BC859BW	54
1PS79SB10	9	BAS16L	17	BAT120S	12	BAV756S	17	BC859C	54
1PS79SB17	9	BAS16LD	17	BAT160A	12	BAV99	16	BC859CW	54
1PS79SB30	9	BAS16T	17	BAT160C	12	BAV99S	17	BC860B	54
1PS79SB31	9	BAS16VV	17	BAT160S	12	BAV99W	17	BC860BW	54
1PS79SB40	9	BAS16VY	17	BAT17	9	BAW101	18	BC860C	54
1PS79SB70	9	BAS16W	17	BAT46WH	9	BAW101S	18	BC860CW	54
1PS88SB48	9	BAS21	18	BAT46WJ	9	BAW156	19	BC868 / -25	54
1PS88SB82	9	BAS21AW	18	BAT54	8	BAW56	16	BC869 / -16 / -25	54
2N7002	73	BAS21H	18	BAT54A	8	BAW56M	17	BCM61B	55
2N7002BK	73	BAS21J	18	BAT54AW	9	BAW56S	17	BCM62B	55
2N7002BKM	73	BAS21SW	18	BAT54C	8	BAW56T	17	BCM847BS	55
2N7002BKBS	75	BAS21VD	18	BAT54CM	9	BAW56W	17	BCM847BV	55
2N7002BKT	73	BAS21W	18	BAT54CV	9	BC807 / -16 / -25 / -40	52	BCM847DS	55
2N7002BKV	75	BAS28	16	BAT54CW	9	BC807DS	53	BCM856BS	55
2N7002BKW	73	BAS29	19	BAT54H	9	BC807W / -16W / -25W / -40W	52	BCM856DS	55
2N7002CK	73	BAS31	19	BAT54J	9	BC817 / -16 / -25 / -40	52	BCM857BS	55
2N7002E	73	BAS316	17	BAT54L	9	BC817DPN	53	BCM857BV	55
2N7002F	73	BAS321	18	BAT54S	8	BC817DS	53	BCM857DS	55
2N7002K	73	BAS32L	16	BAT54SW	9	BC817W / -16W / -25W / -40W	52	BCP51 / -10 / -16	54
2N7002P	73	BAS35	19	BAT54T	9	BC846 / A / B	52	BCP52 / -10 / -16	54
2N7002PS	75	BAS40	8	BAT54VV	9	BC846BPN	53	BCP53 / -10 / -16	54
2N7002PT	73	BAS40-04	8	BAT54W	9	BC846BS	53	BCP54 / -10 / -16	54
2N7002PV	75	BAS40-04W	9	BAT54XY	9	BC846DS	53	BCP55 / -10 / -16	54
2N7002PW	73	BAS40-05	8	BAT720	10	BC846S	53	BCP56 / -10 / -16	54
2PA1576Q / R / S	52	BAS40-05V	9	BAT721	8	BC846T / AT / BT	52	BCP68 / -25	54
2PA1774Q / R / S	52	BAS40-05W	9	BAT721A	8	BC846W / AW / BW	52	BCP69 / -16 / -25	54
2PA1774QM / RM / SM	52	BAS40-06	8	BAT721C	8	BC847 / A / B / C	52	BCV26	56
2PB1219AQ / R / S	52	BAS40-06W	9	BAT721S	8	BC847AM / BM / CM	52	BCV27	56
2PB709ARL	52	BAS40-07	8	BAT74	8	BC847BPN	53	BCV28	56
2PB709ART	52	BAS40-07V	9	BAT74S	9	BC847BS	53	BCV29	56
2PB709ARW / SW	52	BAS40H	9	BAT74V	9	BC847BV	53	BCV46	56
2PB709ASL	52	BAS40L	9	BAT754	8	BC847BVN	53	BCV47	56
2PB710ARL	52	BAS40W	9	BAT754A	8	BC847DS	53	BCV48	56
2PB710ASL	52	BAS40XY	9	BAT754C	8	BC847T / AT / BT / CT	52	BCV49	56
2PC4081Q / R / S	52	BAS416	19	BAT754L	9	BC847W / AW / BW / CW	52	BCV61/A/B/C	55
2PC4617Q / R	52	BAS45A	19	BAT754S	8	BC848B	52	BCV62/A/B/C	55
2PC4617QM / RM	52	BAS45AL	19	BAT760	11	BC848W	52	BCV63 / B	56
2PD1820AR / S	52	BAS516	17	BAT85	8	BC849B	54	BCV64B	56
2PD601ARL	52	BAS521	18	BAT854AW	9	BC849BW	54	BCV65	57
2PD601ART	52	BAS56	19	BAT854CW	9	BC849C	54	BCV71 / 72	52
2PD601ARW / SW	52	BAS70	8	BAT854SW	9	BC849CW	54	BCW29 / 30	52
2PD601ASL	52	BAS70-04	8	BAT854W	9	BC850B	54	BCW31 / 32 / 33	52
2PD601BRL	52	BAS70-04W	9	BAT86	8	BC850BW	54	BCW60B / C / D	52

Index

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
BZV90 series	14	IP4221CZ6-XS	29, 44	IP4770CZ16	35	LD6806CX4/30H	97	NX1117C12Z	95
BZX100A	14	IP4225CZ10	44	IP4771CZ16	35	LD6806CX4/30P	97	NX1117C15Z	95
BZX384 series	14	IP4233CZ6	29, 47	IP4772CZ16	35	LD6806CX4/33H	97	NX1117C18Z	95
BZX585 series	14	IP4234CZ6	29, 43	IP4773CZ14	35	LD6806CX4/33P	97	NX1117C19Z	95
BZX79 series	14	IP4251CZ12-6-TTL	40	IP4774CZ14	35	LD6806CX4/36H	97	NX1117C20Z	95
BZX84 series	14	IP4251CZ16-8-TTL	41	IP4776CZ38	34	LD6806CX4/36P	97	NX1117C25Z	95
BZX84J series	14	IP4251CZ8-4-TTL	39	IP4777CZ38	34	LD6806F/12H	97	NX1117C285Z	95
BZX884 series	14	IP4252CZ12-6-TTL	40	IP4778CZ38	34	LD6806F/12P	97	NX1117C33Z	95
EC103D1	89	IP4252CZ16-8-TTL	41	IP4786CZ32	34	LD6806F/14H	97	NX1117C50Z	95
IP3047CX6	32	IP4252CZ8-4-TTL	39	IP4790CZ38	31, 32, 46	LD6806F/14P	97	NX1117CADJZ	95
IP3048CX5	32	IP4253CZ12-6-TTL	40	IP4791CZ12	34	LD6806F/16H	97	NX2301P	75
IP3053CX10	38	IP4253CZ16-8-TTL	41	IP4852CX25/LF	42	LD6806F/16P	97	NXL0840	89
IP3053CX15	39	IP4253CZ8-4-TTL	39	IP4853CX24/P	42	LD6806F/17H	97	NZH series	14
IP3053CX20	40	IP4254CZ12-6-TTL	40	IP5002CX8/LF	32	LD6806F/17P	97	NZX series	14
IP3053CX5	36	IP4254CZ16-8-TTL	41	LD6805K/12H	96	LD6806F/18H	97	PBHV8115T	66
IP3088CX10	38	IP4254CZ8-4-TTL	39	LD6805K/12P	96	LD6806F/18P	97	PBHV8115Z	66
IP3088CX15	39	IP4256CZ3-M	36	LD6805K/14H	96	LD6806F/22H	97	PBHV8118T	66
IP3088CX20	40	IP4256CZ5-W	37	LD6805K/14P	96	LD6806F/22P	97	PBHV8140Z	66
IP3088CX5	36	IP4256CZ6-F	38	LD6805K/16H	96	LD6806F/23H	97	PBHV8215Z	66
IP3253CZ12-6-TTL	40	IP4264CZ8-10-TTL	42	LD6805K/16P	96	LD6806F/23P	97	PBHV8540T	66
IP3253CZ16-8-TTL	41	IP4264CZ8-20-TTL	42	LD6805K/17H	96	LD6806F/25H	97	PBHV8540Z	66
IP3253CZ8-4-TTL	39	IP4264CZ8-40-TTL	42	LD6805K/17P	96	LD6806F/25P	97	PBHV9040T	66
IP3254CZ12-6-TTL	40	IP4280CZ10	30, 33	LD6805K/18H	96	LD6806F/28H	97	PBHV9040Z	66
IP3254CZ16-8-TTL	41	IP4282CZ6	29, 33, 43, 46	LD6805K/18P	96	LD6806F/28P	97	PBHV9050T	66
IP3254CZ8-4-TTL	39	IP4283CZ10-TBA	30, 33	LD6805K/22H	96	LD6806F/29H	97	PBHV9050Z	66
IP3337CX18/LF	40	IP4283CZ10-TBR	30, 32, 33, 46	LD6805K/22P	96	LD6806F/29P	97	PBHV9115T	66
IP3338CX24/LF	41	IP4283CZ10-TT	30, 32, 33, 46	LD6805K/23H	96	LD6806F/30H	97	PBHV9115X	66
IP3348CX10	34	IP4284CZ10-TBR	32, 33, 45, 46	LD6805K/23P	96	LD6806F/30P	97	PBHV9115Z	66
IP3348CX15	34	IP4284CZ10-TT	30, 32, 33, 45, 46	LD6805K/25H	96	LD6806F/33H	97	PBHV9215Z	66
IP3348CX20	34	IP4285CZ9-TBB	30, 32, 33, 46	LD6805K/25P	96	LD6806F/33P	97	PBHV9540Z	66
IP3348CX5	34	IP4286CZ6-TBF	30, 32, 33, 46	LD6805K/28H	96	LD6806F/36H	97	PBLS1501V	65
IP4027CX20/LF	32	IP4286CZ6-TTY	30, 32, 33, 46	LD6805K/28P	96	LD6806F/36P	97	PBLS1501Y	65
IP4032CX25/LF	41	IP4292CZ10-TBR	31, 32, 34, 45, 46	LD6805K/29H	96	MAC223A6	87	PBLS1502V	65
IP4041CX25/LF	41	IP4302CX2/A	24	LD6805K/29P	96	MAC223A8X	87	PBLS1502Y	65
IP4042CX5/LF	23	IP4303CX4/P	25	LD6805K/30H	96	MAC97A6	86	PBLS1503V	65
IP4043CX5/LF	26	IP4307CX4/LF	36	LD6805K/30P	96	MAC97A8	86	PBLS1503Y	65
IP4044CX8/LF	42	IP4309CX9	31, 34	LD6805K/33H	96	MCR08BT1	89	PBLS1504V	65
IP4047CX6/LF	32	IP4310CX8/P	34	LD6805K/33P	96	MMBT2222A	53	PBLS1504Y	65
IP4048CX5/LF	32	IP4319CX10	29, 43	LD6805K/36H	96	MMBT3904	53	PBLS2001D	65
IP4049CX5/LF	32	IP4337CX18/LF	40	LD6805K/36P	96	MMBT3906	53	PBLS2001S	65
IP4051CX11/LF	42	IP4338CX24/LF	41	LD6806CX4/12H	97	MMBZ10VAL	48	PBLS2002D	65
IP4052CX20/LF	42	IP4342CX5/LF	23	LD6806CX4/12P	97	MMBZ12VAL	48	PBLS2002S	65
IP4053CX15/LF	39	IP4343CX5/LF	26	LD6806CX4/14H	97	MMBZ12VDL	48	PBLS2003D	65
IP4055CX6/LF	32	IP4350CX24/LF	42	LD6806CX4/14P	97	MMBZ15VAL	48	PBLS2003S	65
IP4056CX8/LF	43	IP4352CX24/LF	42	LD6806CX4/16H	97	MMBZ15VDL	48	PBLS2004D	65
IP4057CX10/LF	43	IP4353CX15/LF	39	LD6806CX4/16P	97	MMBZ18VAL	48	PBLS2021D	65
IP4058CX8/LF	43	IP4355CX6/LF	32	LD6806CX4/17H	97	MMBZ18VCL	48	PBLS2022D	65
IP4059CX5/LF	26, 43	IP4356CX4	29, 43	LD6806CX4/17P	97	MMBZ20VAL	48	PBLS2023D	65
IP4060CX16/LF	42	IP4358CX6	31, 43	LD6806CX4/18H	97	MMBZ20VCL	48	PBLS2024D	65
IP4064CX8/LF/P	42	IP4359CX4/LF	29, 43	LD6806CX4/18P	97	MMBZ27VAL	48	PBLS4001D	65
IP4065CX11/LF	43	IP4364CX8/LF/P	42	LD6806CX4/22H	97	MMBZ27VCL	48	PBLS4001V	65
IP4067CX9/LF	42	IP4365CX11	42	LD6806CX4/22P	97	MMBZ33VAL	48	PBLS4001Y	65
IP4078CX6/LF	43	IP4365CX11/P	43	LD6806CX4/23H	97	MMBZ33VCL	48	PBLS4002D	65
IP4085CX4	42	IP4366CX8/P	42	LD6806CX4/23P	97	MMBZ5V6AL	48	PBLS4002Y	65
IP4088CX20/LF	40	IP4368CX9/P	43	LD6806CX4/25H	97	MMBZ6V2AL	48	PBLS4002Y	65
IP4142CX5/LF	26	IP4385CX4	42	LD6806CX4/25P	97	MMBZ6V8AL	48	PBLS4003D	65
IP4153CX15/LF	39	IP4386CX4	42	LD6806CX4/28H	97	MMBZ9V1AL	48	PBLS4003V	65
IP4158CX8/LF	43	IP4387CX4	42	LD6806CX4/28P	97	NUP1301	28	PBLS4003Y	65
IP4220CZ6	29, 44, 47	IP4389CX4	42	LD6806CX4/29H	97	NUP1301U	28	PBLS4004D	65
IP4221CZ6-S	29	IP4769CZ14	35	LD6806CX4/29P	97	NX1117C120Z	95	PBLS4004V	65

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
PDTC123JU	58	PEMB10	59	PEMI1QFN/HK	36	PEMI2QFN/WT	38	PEMI4QFN/RG	39
PDTC123TE	58	PEMB11	59	PEMI1QFN/HM	36	PEMI2STD/CE	37	PEMI4QFN/RK	39
PDTC123TM	58	PEMB13	59	PEMI1QFN/HP	36	PEMI2STD/CG	37	PEMI4QFN/RM	39
PDTC123TT	58	PEMB14	59	PEMI1QFN/HR	36	PEMI2STD/CK	37	PEMI4QFN/RP	39
PDTC123TU	58	PEMB15	59	PEMI1QFN/HT	36	PEMI2STD/CM	36	PEMI4QFN/RR	39
PDTC123YE	58	PEMB16	59	PEMI1QFN/LE	36	PEMI2STD/CP	36	PEMI4QFN/RT	39
PDTC123YM	58	PEMB17	59	PEMI1QFN/LG	36	PEMI2STD/CR	36	PEMI4QFN/WE	39
PDTC123YT	58	PEMB18	59	PEMI1QFN/LK	36	PEMI2STD/CT	36	PEMI4QFN/WG	39
PDTC123YU	58	PEMB19	59	PEMI1QFN/LM	36	PEMI2STD/HE	37	PEMI4QFN/WK	39
PDTC124EE	58	PEMB2	59	PEMI1QFN/LP	36	PEMI2STD/HG	37	PEMI4QFN/WM	39
PDTC124EM	58	PEMB20	59	PEMI1QFN/LR	36	PEMI2STD/HK	37	PEMI4QFN/WP	39
PDTC124ET	58	PEMB24	59	PEMI1QFN/LT	36	PEMI2STD/HM	37	PEMI4QFN/WR	39
PDTC124EU	58	PEMB3	59	PEMI1QFN/RE	36	PEMI2STD/HP	37	PEMI4QFN/WT	39
PDTC124TE	58	PEMB30	59	PEMI1QFN/RG	36	PEMI2STD/HR	37	PEMI6CSP/RT	39
PDTC124TM	58	PEMB4	59	PEMI1QFN/RK	36	PEMI2STD/HT	37	PEMI6CSP/RW	39
PDTC124TT	58	PEMB9	59	PEMI1QFN/RM	36	PEMI2STD/LE	37	PEMI6QFN/CE	39
PDTC124TU	58	PEMD10	59	PEMI1QFN/RP	36	PEMI2STD/LG	37	PEMI6QFN/CG	39
PDTC124XE	58	PEMD12	59	PEMI1QFN/RR	36	PEMI2STD/LK	37	PEMI6QFN/CK	39
PDTC124XM	58	PEMD13	59	PEMI1QFN/RT	36	PEMI2STD/LM	37	PEMI6QFN/CM	39
PDTC124XT	58	PEMD14	59	PEMI1QFN/WE	36	PEMI2STD/LP	37	PEMI6QFN/CP	39
PDTC124XU	58	PEMD15	59	PEMI1QFN/WG	36	PEMI2STD/LR	37	PEMI6QFN/CR	39
PDTC143EE	58	PEMD16	59	PEMI1QFN/WK	36	PEMI2STD/LT	37	PEMI6QFN/CT	39
PDTC143EM	58	PEMD17	59	PEMI1QFN/WM	36	PEMI2STD/RE	37	PEMI6QFN/HE	40
PDTC143ET	58	PEMD18	59	PEMI1QFN/WP	36	PEMI2STD/RG	37	PEMI6QFN/HG	40
PDTC143EU	58	PEMD19	59	PEMI1QFN/WR	36	PEMI2STD/RK	37	PEMI6QFN/HK	40
PDTC143TE	58	PEMD2	59	PEMI1QFN/WT	36	PEMI2STD/RM	37	PEMI6QFN/HM	40
PDTC143TM	58	PEMD20	59	PEMI2QFN/CE	37	PEMI2STD/RP	37	PEMI6QFN/HP	40
PDTC143TT	58	PEMD24	59	PEMI2QFN/CG	37	PEMI2STD/RR	37	PEMI6QFN/HR	40
PDTC143TU	58	PEMD3	59	PEMI2QFN/CK	37	PEMI2STD/RT	37	PEMI6QFN/HT	39
PDTC143XE	58	PEMD30	59	PEMI2QFN/CM	37	PEMI2STD/WE	37	PEMI6QFN/LE	40
PDTC143XM	58	PEMD4	59	PEMI2QFN/CP	37	PEMI2STD/WG	37	PEMI6QFN/LG	40
PDTC143XT	58	PEMD48	59	PEMI2QFN/CR	37	PEMI2STD/WK	37	PEMI6QFN/LK	40
PDTC143XU	58	PEMD6	59	PEMI2QFN/CT	37	PEMI2STD/WM	37	PEMI6QFN/LM	40
PDTC143ZE	58	PEMD9	59	PEMI2QFN/HE	38	PEMI2STD/WP	37	PEMI6QFN/LP	40
PDTC143ZM	58	PEMH1	59	PEMI2QFN/HG	38	PEMI2STD/WR	37	PEMI6QFN/LR	40
PDTC143ZT	58	PEMH10	59	PEMI2QFN/HK	38	PEMI2STD/WT	37	PEMI6QFN/LT	40
PDTC143ZU	58	PEMH11	59	PEMI2QFN/HM	37	PEMI4CSP/RT	38	PEMI6QFN/RE	40
PDTC144EE	58	PEMH13	59	PEMI2QFN/HP	37	PEMI4CSP/RW	38	PEMI6QFN/RG	40
PDTC144EM	58	PEMH14	59	PEMI2QFN/HR	37	PEMI4QFN/CE	38	PEMI6QFN/RK	40
PDTC144ET	58	PEMH15	59	PEMI2QFN/HT	37	PEMI4QFN/CG	38	PEMI6QFN/RM	40
PDTC144EU	58	PEMH16	59	PEMI2QFN/LE	38	PEMI4QFN/CK	38	PEMI6QFN/RP	40
PDTC144TE	58	PEMH17	59	PEMI2QFN/LG	38	PEMI4QFN/CM	38	PEMI6QFN/RR	40
PDTC144TM	58	PEMH18	59	PEMI2QFN/LK	38	PEMI4QFN/CP	38	PEMI6QFN/RT	40
PDTC144TT	58	PEMH19	59	PEMI2QFN/LM	38	PEMI4QFN/CR	38	PEMI6QFN/WE	40
PDTC144TU	58	PEMH2	59	PEMI2QFN/LP	38	PEMI4QFN/CT	38	PEMI6QFN/WG	40
PDTC144VE	58	PEMH20	59	PEMI2QFN/LR	38	PEMI4QFN/HE	39	PEMI6QFN/WK	40
PDTC144VM	58	PEMH24	59	PEMI2QFN/LT	38	PEMI4QFN/HG	38	PEMI6QFN/WM	40
PDTC144VT	58	PEMH30	59	PEMI2QFN/RE	38	PEMI4QFN/HK	38	PEMI6QFN/WP	40
PDTC144VU	58	PEMH4	59	PEMI2QFN/RG	38	PEMI4QFN/HM	38	PEMI6QFN/WR	40
PDTC144WE	58	PEMH7	59	PEMI2QFN/RK	38	PEMI4QFN/HP	38	PEMI6QFN/WT	40
PDTC144WM	58	PEMH9	59	PEMI2QFN/RM	38	PEMI4QFN/HR	38	PEMI8CSP/RT	40
PDTC144WT	58	PEMI1QFN/CE	36	PEMI2QFN/RP	38	PEMI4QFN/HT	38	PEMI8CSP/RW	40
PDTC144WU	58	PEMI1QFN/CG	36	PEMI2QFN/RR	38	PEMI4QFN/LE	39	PEMI8QFN/CE	40
PDTD113ET	59	PEMI1QFN/CK	36	PEMI2QFN/RT	38	PEMI4QFN/LG	39	PEMI8QFN/CG	40
PDTD113ZT	59	PEMI1QFN/CM	36	PEMI2QFN/WE	38	PEMI4QFN/LK	39	PEMI8QFN/CK	40
PDTD123ET	59	PEMI1QFN/CP	36	PEMI2QFN/WG	38	PEMI4QFN/LM	39	PEMI8QFN/CM	40
PDTD123TT	59	PEMI1QFN/CR	36	PEMI2QFN/WK	38	PEMI4QFN/LP	39	PEMI8QFN/CP	40
PDTD123YT	59	PEMI1QFN/CT	36	PEMI2QFN/WM	38	PEMI4QFN/LR	39	PEMI8QFN/CR	40
PDZ-B series	14	PEMI1QFN/HE	36	PEMI2QFN/WP	38	PEMI4QFN/LT	39	PEMI8QFN/CT	40
PEMB1	59	PEMI1QFN/HG	36	PEMI2QFN/WR	38	PEMI4QFN/RE	39	PEMI8QFN/HE	41

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
PMD3001D	57	PMEG3005ET	10	PMEG6010CEH	10	PMP5501V	55	PSMN004-60B	80
PMD9001D	57	PMEG3010BEA	11	PMEG6010CEJ	11	PMP5501Y	55	PSMN005-30K	78
PMD9002D	57	PMEG3010BEP	10	PMEG6010CPA	12	PMR280UN	71	PSMN005-75B	80
PMD9003D	57	PMEG3010BER	10	PMEG6010EP	10	PMR290XN	71	PSMN006-20K	77
PMD9010D	57	PMEG3010BEV	11	PMEG6010ER	10	PMR370XN	71	PSMN008-75B	80
PMD9050D	57	PMEG3010CEH	10	PMEG6020EP	10	PMR400UN	71	PSMN008-75P	80
PMDPB65UP	76	PMEG3010CEJ	11	PMEG6020EPA	11	PMR780SN	73	PSMN009-100B	81
PMEG1020EA	11	PMEG3010EB	11	PMEG6020ER	10	PMS53904	53	PSMN009-100P	81
PMEG1020EH	10	PMEG3010EH	10	PMEG6030EP	10	PMS53906	53	PSMN011-80YS	80
PMEG1020EJ	11	PMEG3010EJ	11	PMF170XP	75	PMST2222	53	PSMN012-100YS	81
PMEG1020EV	11	PMEG3010EP	10	PMF250XN	71	PMST2222A	53	PSMN012-60YS	80
PMEG1030EH	10	PMEG3010ER	10	PMF280UN	71	PMST2369	53	PSMN012-80PS	80
PMEG1030EJ	11	PMEG3010ET	10	PMF290XN	71	PMST2907A	53	PSMN013-100ES	81
PMEG2005AEA	11	PMEG3015EH	10	PMF370XN	71	PMST3904	53	PSMN013-100PS	81
PMEG2005AEL	11	PMEG3015EJ	11	PMF3800SN	73	PMST3906	53	PSMN013-30LL	78
PMEG2005AELD	11	PMEG3015EV	11	PMF400UN	71	PMST4401	53	PSMN013-80YS	80
PMEG2005AEV	11	PMEG3020BEP	10	PMF780SN	73	PMST4403	53	PSMN014-40YS	79
PMEG2005CT	12	PMEG3020BER	10	PMFFPB6532UP	76	PMST5088	52	PSMN014-60LS	80
PMEG2005EB	11	PMEG3020CEP	10	PMFFPB6545UP	76	PMST5089	52	PSMN015-100B	81
PMEG2005EH	10	PMEG3020CPA	12	PMG370XN	71	PMST5550	54	PSMN015-100P	81
PMEG2005EJ	11	PMEG3020DEP	10	PMG85XP	75	PMST5551	54	PSMN015-110P	81
PMEG2005EL	11	PMEG3020EH	10	PMGD280UN	75	PMST6428	52	PSMN015-60PS	80
PMEG2005ELD	11	PMEG3020EJ	11	PMGD290XN	75	PMST6429	52	PSMN016-100PS	81
PMEG2005ET	10	PMEG3020EP	10	PMGD370XN	75	PMSTA05	52	PSMN016-100YS	81
PMEG2010AEB	11	PMEG3020EPA	11	PMGD400UN	75	PMSTA06	52	PSMN017-30LL	78
PMEG2010AEH	10	PMEG3020ER	10	PMGD780SN	75	PMSTA42	54	PSMN017-60YS	80
PMEG2010AEJ	11	PMEG3030BEP	10	PMGD8000LN	75	PMSTA55	52	PSMN017-80PS	80
PMEG2010AET	10	PMEG3030EP	10	PMK30EP	83	PMSTA56	52	PSMN018-80YS	80
PMEG2010BEA	11	PMEG3050BEP	10	PMK35EP	83	PMSTA92	54	PSMN020-100YS	81
PMEG2010BER	10	PMEG3050EP	10	PMK50XP	83	PMV117EN	71	PSMN022-30PL	78
PMEG2010BEV	11	PMEG4002EB	11	PML260SN	82	PMV16UN	71	PSMN023-80LS	80
PMEG2010EA	11	PMEG4002EJ	11	PML340SN	82	PMV18EN	71	PSMN025-100D	81
PMEG2010EH	10	PMEG4002EL	11	PMMT491A	61	PMV20XN	71	PSMN026-80YS	80
PMEG2010EJ	11	PMEG4002ELD	11	PMMT591A	63	PMV213SN	73	PSMN027-100PS	81
PMEG2010EPA	11	PMEG4005AEA	11	PMN15EN	71	PMV27UP	75	PSMN028-100YS	81
PMEG2010ER	10	PMEG4005AEV	11	PMN21UP	75	PMV28UN	71	PSMN030-150B	82
PMEG2010ET	10	PMEG4005CT	12	PMN23UN	71	PMV30UN	71	PSMN030-150P	82
PMEG2010EV	11	PMEG4005EH	10	PMN27UN	71	PMV30XN	71	PSMN030-60YS	80
PMEG2015EA	11	PMEG4005EJ	11	PMN27UP	75	PMV31EN	71	PSMN034-100PS	81
PMEG2015EH	10	PMEG4005ET	10	PMN28UN	71	PMV31XN	71	PSMN035-100LS	81
PMEG2015EJ	11	PMEG4010BEA	11	PMN34LN	71	PMV40UN	71	PSMN035-150B	82
PMEG2015EV	11	PMEG4010BEV	11	PMN34UN	71	PMV45EN	71	PSMN035-150P	82
PMEG2020AEA	11	PMEG4010CEH	10	PMN35EN	71	PMV48XP	75	PSMN038-100K	81
PMEG2020CPA	12	PMEG4010CEJ	11	PMN38EN	71	PMV56XN	71	PSMN039-100YS	81
PMEG2020EH	10	PMEG4010CPA	12	PMN40LN	71	PMV60EN	71	PSMN045-80YS	80
PMEG2020EJ	11	PMEG4010EH	10	PMN45EN	71	PMV65XP	75	PSMN050-80PS	80
PMEG2020EPA	11	PMEG4010EJ	11	PMN48XP	75	PMZ250UN	71	PSMN057-200B	82
PMEG3002AEB	11	PMEG4010EP	10	PMN49EN	71	PMZ270XN	71	PSMN057-200P	82
PMEG3002AEL	11	PMEG4010ER	10	PMN50XP	75	PMZ350XN	71	PSMN059-150Y	82
PMEG3002AELD	11	PMEG4010ET	10	PMN55LN	71	PMZ390UN	71	PSMN063-150D	82
PMEG3002EJ	11	PMEG4020EP	10	PMP4201G	55	PMZ760SN	73	PSMN069-100YS	81
PMEG3002TV	12	PMEG4020EPA	11	PMP4201V	55	PRTR5V0U1T	28	PSMN070-200B	82
PMEG3005AEA	11	PMEG4020ER	10	PMP4201Y	55	PRTR5V0U2AX	28, 43	PSMN070-200P	82
PMEG3005AEV	11	PMEG4030EP	10	PMP4501G	55	PRTR5V0U2D	28, 44	PSMN085-150K	82
PMEG3005CT	12	PMEG4030ER	10	PMP4501V	55	PRTR5V0U2F	28, 44	PSMN102-200Y	82
PMEG3005EB	11	PMEG4050EP	10	PMP4501Y	55	PRTR5V0U2K	28, 44	PSMN130-200D	82
PMEG3005EH	10	PMEG6002EB	11	PMP5201G	55	PRTR5V0U2X	28, 43	PSMN165-200K	82
PMEG3005EJ	11	PMEG6002EJ	11	PMP5201V	55	PRTR5V0U4D	30, 44	PSMN1R0-30YLC	78
PMEG3005EL	11	PMEG6002TV	12	PMP5201Y	55	PRTR5V0U4Y	30, 44	PSMN1R2-25YL	77
PMEG3005ELD	11	PMEG6010AED	10	PMP5501G	55	PRTR5V0U8S	31	PSMN1R3-30YL	78

www.nxp.com

© 2011 NXP Semiconductors N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: January 2011

Document order number: 9397 750 17022

Printed in the Netherlands

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Filter Circuits](#) category:

Click to view products by [Nexperia](#) manufacturer:

Other Similar products are found below :

[761280-1](#) [SBSGC0500224MXB](#) [SBSPP0250104MXT](#) [SBSPP0250154MXT](#) [SBSPP0500473MXT](#) [SBSPP1000102MXT](#)
[SBSPP1000153MXB](#) [SBSPP1000220MCT](#) [SBSPP1000332MXT](#) [SBSPP1000470MCT](#) [SBSPP1000471MCT](#) [SBSPP1000472MXT](#)
[SNZF220DFT1G](#) [CM1442-06CP](#) [EMI8041MUTAG](#) [SBSPP0500473MXB](#) [SBSPP1000101MCT](#) [SBSPP1000220MCB](#) [SBSPP1000221MCT](#)
[EMIF06-USD05F3](#) [EMIF03-SIM03F3](#) [EMI7112FCTAG](#) [EMI7403FCTBG](#) [EMI2180MTTBG](#) [CM1442-08CP](#) [CSPEMI204FCTAG](#)
[SBSPP1000152MXT](#) [SBSGC5000473MXT](#) [SBSMC0500474MXT](#) [EMI8043MUTAG](#) [MEA2010PE360T001](#) [NFA18SL307V1A45L](#) [1-6609037-5](#)
[CM1690-06DE](#) [EMIF05-SK01F3](#) [EMIF02-USB03F2](#) [BNX022-01L](#) [BNX024H01L](#) [BNX025H01L](#) [BNX026H01L](#)
[NFA21SL806X1A48L](#) [NFL18SP157X1A3D](#) [NFL21SP106X1C3D](#) [NFL21SP207X1C3D](#) [NFL21SP307X1C3D](#) [NFL21SP506X1C3D](#)
[NFL21SP706X1C3D](#) [NFW31SP207X1E4L](#) [BNX022-01B](#) [BNX027H01L](#)