

**IC Socket - Stamped and formed contact version
Chip Carrier Socket - PLCC SMT**

151 Series

For square plastic chip carrier of 1.27 mm / 0.5" pitch

Technical Data

Material

- Contact: Copper Alloy
- Plating: 2um/ 80 u" nickel
(Contact) 3.75um/ 150 u" tin gold plating upon request
- Insulator body: Glass filled polyester UL 94V-0

Electrical



- Current rating: 1 Amp continuous
- Contact resistance: $\leq 30m\Omega$
- Insulation resistance: $\geq 1000M\Omega$
- Dielection withstanding voltage: 500V AC (1 minute)

Mechanical


- Operating Temperature: -65°C to 125°C
- Vibrations: 1 micro second without interruption
- Durability: 25 cycles

Applications and Features

- With 1.27mmpitch PCB layout
- SMT version.
- Accept"JEDEC"leadless chips (PLCC package)
- Available in 20,28,32,44,52,68 and 84 positions
- Available for IR-Reflow or vapor phase soldering.
- Visual window for solder-tails inspection

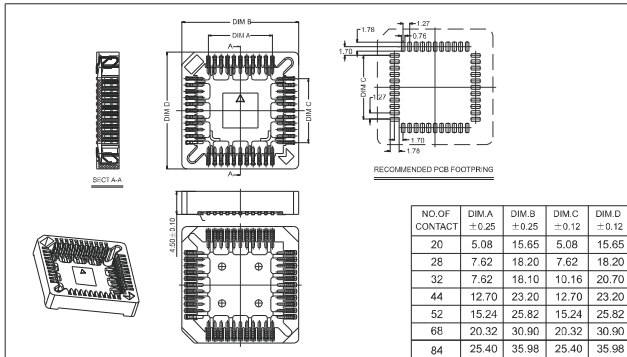

Notes: Please replace "X" with appropriate coding listed in the tables below

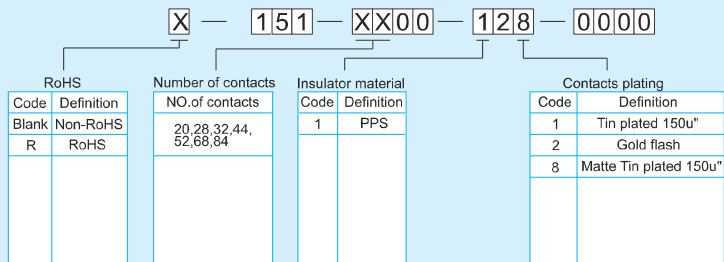

Note: Dimensions are shown in Millimeters .Dimensions are for reference only.

Pin Headers Single Row Straight And Right Angle Type

208 Series

Pitch:2.00mm/.07874"

Technical Data

Material

- Contact: Copper Alloy
- Plating: 1.25um/ 50 u" nickel gold and tin plating see table below (Contact)
- Insulator body: Glass filled polyester UL 94V-0
- Boardlock: Copper Alloy
- Plating: 1.25um/ 50 u" nickel tin plating (Contact)
- Insulator body: Glass filled polyester UL 94V-0

Electrical


- Current rating: 1.0 Amp
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Dielection withstanding voltage: 500VAC RMS

Mechanical


- Operating Temperature: -25°C to 105°C
- Mating cycle: > 250 mating cycle

Applications and Features

- Contacts available in Phosphor bronze (FISK) and Brass (CuZn).
- Straight mount , right angle mount and SMT are available.
- Plug connector with and without eject latch.
- Center coding.
- The connector are available for press-fit, solder and THR process.

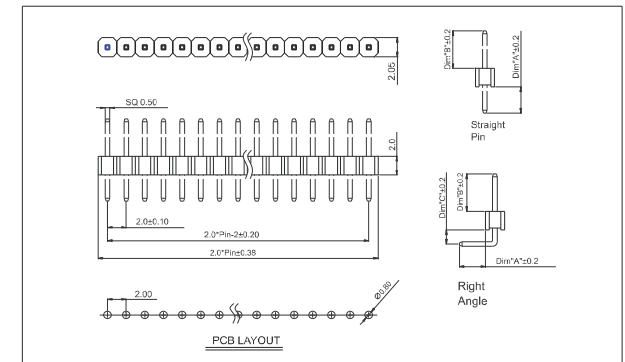

Notes: Please replace "X" with appropriate coding listed in the tables below

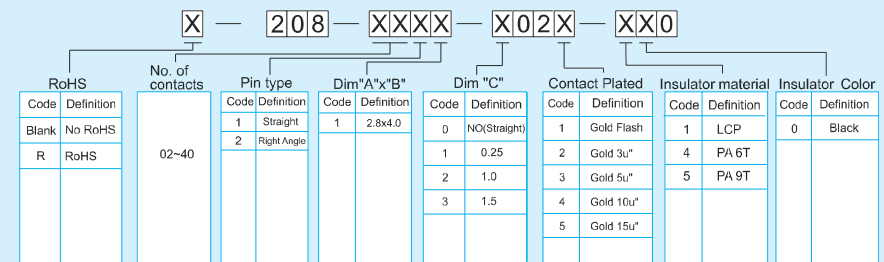

Note: Dimensions are shown in Millimeters .Dimensions are for reference only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Nextronics](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)
[001000](#)