


37P	55.42	63.50	69.32	8.38	12.50
25P	38.96	47.04	53.04	8.38	12.50
15P	25.25	33.32	39.14	8.38	12.50
9P	16.92	24.99	30.81	8.38	12.50
POS. NO.	A	B	C	D	E
	DIMENSION				

SPECIFICATIONS:
 Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:30m ohm MAX
 Insulation resistance:5000M ohm MIN
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C ~ +85°C

MATERIAL AND FINISH
 Insulator:PBT+30%G.F(UL94V-0)
 Contact:Copper Alloy Nickel Undercoated Selective Gold Plated
 Finish:Metal Iron With Tin Plated

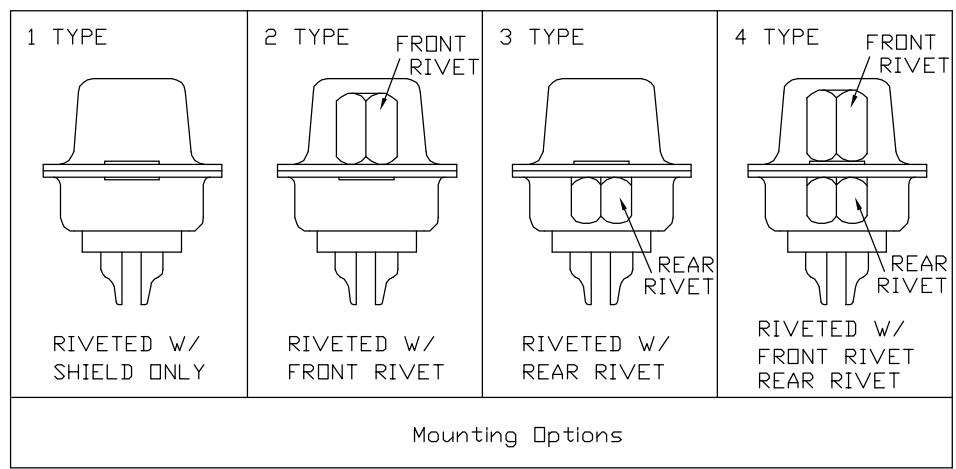

PART NO.
 Z-SUBDB * M * 0 * * * * *
 NO OF CONTACTS ————
 A=9PIN
 B=15PIN
 C=25PIN
 E=37PIN
 TYPE ————
 M=MALE
 MOUNTING OPTIONS ————
 1=RIVETED W/SHIELD ONLY
 2=RIVETED W/FRONT RIVET
 3=RIVETED W/REAR RIVET
 4=RIVETED W/FRONT RIVET REAR RIVET
 CONTACT MATERIAL ————
 2=BRASS
 7=PHOSPHOR BRONZE
 LOGO
 0=NO LOGO
 1=NEXTRON LOGO
 INSULATOR COLOR
 0=BLACK
 6=BLUE
 9=WHITE
 INSULATOR MATERIAL
 0=PBT
 2=NYLON
 PLATED
 A=GOLD 1u"/LIGHT TIN
 B=GOLD 3u"/LIGHT TIN
 C=GOLD 5u"/LIGHT TIN
 E=GOLD 15u"/LIGHT TIN

REV.	ECN. NO.	DESCRIPTION	DATE	DRAWN	APPD
A2		修正标注 Δ=2	6/24/11		
A1		修正料号	9/17/09	李雪萍	杨海文
A		新版发行	8/18/09	李雪萍	杨海文

DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	NAME: D-SUB焊接式PCB公端	 NEXTRONICS ENGINEERING CORP.
GENERAL TOLERANCES: (UNLESS SPECIFIED)	PART NO: Z-SUBDB*M*0*****	
4 PLACE ± * ±.	APPD:	DWG. NO: 010-0000-600
3 PLACE ± * ±.	CHKD:	SCALE: 1 / 1
2 PLACE ± 0.30 ±.	DRAWN: 畢杏子 06/24.11	SHEET: 1 / 1
1 PLACE ± 0.10 ±.		REV.: A2
ANGULAR: X°± 1'		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [Nextronics](#) manufacturer:

Other Similar products are found below :

[56F711-015](#) [LV242999-142T12](#) [015-0339-000](#) [015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-0372-008](#) [015-8544-011](#) [015-8755-001](#)
[017041-0005](#) [020419-0104](#) [012-0467-000](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [609-9P](#) [M24308/2-23Z](#) [M24308/2-36Z](#) [M24308315F](#)
[CT0P14S-5SXS](#) [CT0P22-14PS](#) [CT1E20-19SS](#) [CT2-10SL-3SC](#) [CT2-14S-2PCA34](#) [CT2-16S-17PS](#) [CT2-18-10PS-FMLB-D](#) [CT2-18-11PCAU](#)
[CT2-18-1PSAUA34](#) [CT2-22-19SC](#) [CT2-22-19SS-A206](#) [CT2-24-2PS](#) [CT2-28-12SC](#) [CT2-28-12SSA232](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#)
[CT6-14S-2SC](#) [CT6-16-12SC](#) [CT6-18-10PSA206](#) [CT6-18-10PSA232](#) [CT6-18-10SSF127A206](#) [CT6-22-10PS](#) [CT6-28-22SS](#) [CT6E14S-2S0](#)
[CT6E14S-2SC-A206](#) [CT6E14S-5SC](#) [CT6E14SA7SC](#) [CT6E20-14SS](#) [CT6E22-10PS](#) [CT6E22-14PC](#) [CT6E22-14PS](#)