

SPECIFICATIONS:
 Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:30m ohm MAX
 Insulation resistance:5000M ohm MIN
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C~+85°C

MATERIAL AND FINISH
 Insulator:PBT+30%G.F(UL94V-0)
 Contact:Copper Alloy Nickel Undercoated Selective Gold Plated
 Finish:Metal Iron With Tin Plated

PART NO.:

Z-SUB DB * M * 2 * * * *

NO. OF CONTACTS
 A=9PIN
 B=15PIN
 C=25PIN
 E=37PIN

LOGO
 0=NO LOGO
 2=NEXTRON LOGO

INSULATOR COLOR
 0=BLACK
 6=BLUE
 9=WHITE

INSULATOR MATERIAL
 0=PBT
 2=NYLON



CONTACT PLATED:(CONTACT AREA)
 1=FULL GOLD 1u"
 7=FULL LIGHT TIN
 A=GOLD 1u"/LIGHT TIN
 B=GOLD 3u"/LIGHT TIN
 C=GOLD 5u"/LIGHT TIN
 E=GOLD 15u"/LIGHT TIN

CONTACT MATERIAL
 2=BRASS

MOUNTING OPTIONS
 1=RIVETED W/ SHIELD ONLY
 2=RIVETED W/ FRONT RIVET
 3=RIVETED W/ REAR RIVET
 4=RIVETED W/ FRONT RIVET REAR RIVET

NUT POST HEIGHT(H)
 0=5.8mm(STD)
 1=4.8mm

37P	55.42	63.50	69.32	8.38	12.50
25P	38.96	47.04	53.04	8.38	12.50
15P	25.25	33.32	39.14	8.38	12.50
9P	16.92	24.99	30.81	8.38	12.50
POS. NO.	A	B	C	D	E
	DIMENSION				

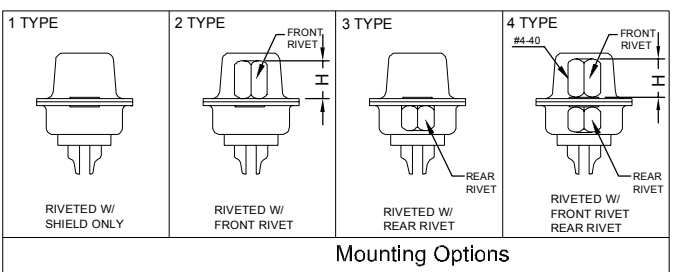

B	ECN-19105	Δ=1	2019/10/29
A4	ADD LOGO AREA		2017/08/07
REV.	DESCRIPTION	DATE	ANGLES
			X°±3°

UNITS: ■ mm □ inch	SIZE A3	NAME: D-SUB 焊接式 PCB 公端	NEXTRONICS ENGINEERING CORP.		
GENERAL TOLERANCE: (UNLESS SPECIFIED)		PART NO: Z-SUBDBXMX2XXXX	TITLE: CUSTOMER DWG		
4 PLACE ± ** ±. **	3 PLACE ± ** ±. **	APPD:	DWG NO: 010-0000-600		
2 PLACE ± 0.20 ±. **	1 PLACE ± 0.30 ±. **	CHKD:	SCALE SHEET REV.		
DESIGN: Lu 陳惠枝 2019/10/29		DRAW:			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [Nextronics](#) manufacturer:

Other Similar products are found below :

[DCM37S732N](#) [DAM15P500](#) [DEV09S364GTLF](#) [DEM09P032N](#) [DDM50P732N](#) [DAM15S332N](#) [173109-2218](#) [173109-2466](#) [173109-2436](#)
[173109-2435](#) [56F706-005-LI](#) [56F711-015](#) [015-0341-000](#) [015-0372-008](#) [015-8544-011](#) [017041-0005](#) [012-0515-000](#) [012-9507-034](#) [012-9507-](#)
[114](#) [012-9534-001](#) [020745-0008](#) [609-25P](#) [M24308/2-23Z](#) [M243082310F](#) [M243082410F](#) [M243082411F](#) [M24308/4-21](#) [CT1A18-11PSA206](#)
[CT1N36-5SC](#) [CT2-16S-17PS](#) [CT2-20-15PCAU](#) [CT2-24-12PS](#) [CT2-24-28PSF127A206](#) [CT2-32-9PC](#) [CT6F9767-14-4-14S-5PC](#)
[CT6FA10SL-4PS](#) [CT7-18-10SC](#) [CT7-18-10SCAU](#) [CT7-18-12SCAU](#) [CT7-18-1PC](#) [CT7-18-1PCAU](#) [CT7-18-21SCAU](#) [M83513/01-FC](#)
[M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [69001-865](#) [6STD09PCM99B70X](#) [6STD09SCT99S40X](#) [6STD15PCT99S40X](#)
[6STD15SCM99B30X](#)