

SPECIFICATIONS:
 Current rating: 3.0A AC/DC
 Voltage rating: 250V AC/DC
 Contact resistance: 30m ohm MAX
 Insulation resistance: 5000M ohm MIN
 Withstanding voltage: 1000V AC for one minute
 Operating temperature range: -40°C ~ +85°C

MATERIAL AND FINISH
 Insulator: PBT+30%G.F(UL94V-0)
 Contact: Copper Alloy Nickel Undercoated Selective Gold Plated
 Finish: Metal Iron With Tin Plated

PART NO.:

Z-SUB DP * F * * 7 * * * *

NO. OF CONTACTS
 A=9PIN
 B=15PIN
 C=25PIN
 E=37PIN

MOUNTING OPTIONS
 1=RIVETED W/SHIELD ONLY
 2=RIVETED W/FRONT RIVET
 3=RIVETED W/REAR RIVET
 4=RIVETED W/NUT RIVET
 5=RIVETED W/HEX SCREW +HEX NUT

LOGO
 0=NO LOGO
 2=NEXTRON LOGO

INSULATOR COLOR
 0=BLACK
 6=BLUE
 9=WHITE


INSULATOR MATERIAL
 0=PBT
 2=NYLON

CONTACT PLATED:(CONTACT AREA)
 1=FULL GOLD 1u"
 2=GOLD 3u"
 3=GOLD 5u"
 4=GOLD 10u"
 5=GOLD 15u"
 6=GOLD 30u"

CONTACT MATERIAL
 7=PHOSPHOR BRONZE

△ NUT POST HEIGHT(H)
 0=5.8mm(STD)
 1=4.8mm

37P	54.84	63.50	69.32	7.90	12.50
25P	38.38	47.04	53.04	7.90	12.50
15P	24.66	33.32	39.14	7.90	12.50
9P	16.33	24.99	30.81	7.90	12.50
POS. NO.	A	B	C	D	E
	DIMENSION				

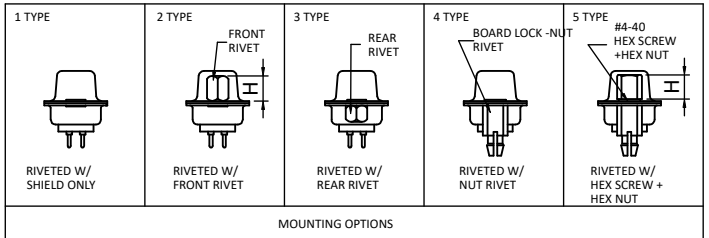

ENGINEERING
 NEXTRONICS CORP ORATION
 ISSUE DATE
 2020/04/17
nexttron
 This file is automatically issued by EPDM and is not valid without the issue date

D	ECR-20049	△=1	2020/04/03
C	ECN-19105	△=1	2019/11/22
B	ECN-150091	UPDATE	2015/7/27
REV.	DESCRIPTION	DATE	ANGLES
			X° ± 3°

UNITS: ■ mm □ inch	SIZE A3	NAME: D-SUB DP TYPE FEMALE PCB SOLDER TYPE	nexttron NEXTRONICS ENGINEERING CORP.	
GENERAL TOLERANCE: (UNLESS SPECIFIED)		PART NO: Z-SUBDPXFFX7XXXX	TITLE: CUSTOMER DWG	
	mm	inch	APPD: Peter 廖小瓊 2020/04/17	DWG NO: 010-0000-636
4 PLACE	± **	± **	CHKD: Linson 曾偉雄 2020/04/17	SCALE SHEET REV. 1/1 1/1 D
3 PLACE	± **	± **	DRAW:	
2 PLACE	± 0.20	± **	DESIGN: Lu 陳惠枝 2020/04/17	
1 PLACE	± 0.30	± **		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [Nextronics](#) manufacturer:

Other Similar products are found below :

[56F711-015](#) [LV242999-142T12](#) [015-0339-000](#) [015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-0372-008](#) [015-8544-011](#) [017041-0005](#)
[020419-0104](#) [012-0467-000](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [609-9P](#) [M24308/2-23Z](#) [M24308/2-36Z](#) [CT0-24-10SC](#) [CT06E20-22SS](#)
[CT0P14S-5SXS](#) [CT0P22-14PS](#) [CT0U22-14PSA206F127](#) [CT1E20-19SS](#) [CT1E20-22SCAU-G9](#) [CT1LA20-22SS](#) [CT2-10SL-3SC](#) [CT2-10SL-4PH](#) [CT2-14S-2PCA34](#) [CT2-16S-17PS](#) [CT2-18-10PS-FMLB-D](#) [CT2-18-11PCAU](#) [CT2-18-1PSAUA34](#) [CT2-22-19SC](#) [CT2-22-19SS-A206](#)
[CT2-22-22PSA34](#) [CT2-24-2PS](#) [CT2-28-12SC](#) [CT2-28-12SSA232](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6-16-12SC](#) [CT6-18-10PSA206](#) [CT6-18-10PSA232](#) [CT6-18-10SSF127A206](#) [CT6-20-15SSA232](#) [CT6-22-10PS](#) [CT6-28-22SS](#) [CT6E14S-2S0](#) [CT6E14S-2SC-A206](#)