

SPECIFICATIONS:
 Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:30m ohm MAX
 Insulation resistance:5000M ohm MIN
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C~+85°C

MATERIAL AND FINISH
 Insulator:PBT+30%G.F(UL94V-0)
 Contact:Copper Alloy, Nickel Undercoated Selective Gold Plated
 Shell:Metal Iron, With Tin Plated

PART NO.

Z-SUBDR * F * * * * * *

NO. OF CONTACTS


A=9PIN
 B=15PIN
 C=25PIN
 E=37PIN

TYPE
 F=FEMALE


MOUNTING OPTIONS

6=SCREWED HEX SCREW ON BOARD LOCK
 7=RIVETED W/ BOARD LOCK/WASHER
 8=RIVETED W/BOARD LOCK/WASHER/HEX SCREW
 9=RIVETED W/ BOARD LOCK/WASHER/ ATTACHED HEX SCREW
 C=SCREWED HEX SCREW DIRECT RIVETING NUT LOCK

LOGO
 0=NO LOGO
 2=NEXTRON LOGO
 INSULATOR COLOR
 0=BLACK
 6=BLUE
 9=WHITE
 INSULATOR MATERIAL
 0=PBT
 2=NYLON
 PLATED
 A=GOLD 1u"/LIGHT TIN
 B=GOLD 3u"/LIGHT TIN
 C=GOLD 5u"/LIGHT TIN
 E=GOLD 15u"/LIGHT TIN
 F=GOLD 30u"/LIGHT TIN
 CONTACT MATERIAL
 7=PHOSPHOR BRONZE
 NUT POST HEIGHT(H*L) Δ
 0=5.8*12.8(STD)
 1=4.8*11.8

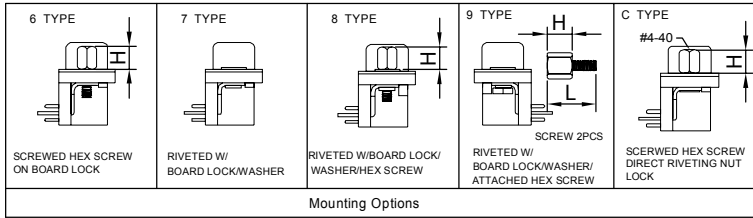

UNITS: ■ mm □ inch	SIZE	NAME: D-SUB DR TYPE FEMALE PCB SOLDER TYPE		 NEXTRONICS ENGINEERING CORP.						
	A3	PART NO: Z-SUBDRXFX7XXXX			TITLE: CUSTOMER DWG					
GENERAL TOLERANCE: (UNLESS SPECIFIED)		APPD:	DWG NO: 010-0000-687							
4 PLACE	± **	CHKD:	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1/1</td> <td>1/1</td> <td>B</td> </tr> </table>		SCALE	SHEET	REV.	1/1	1/1	B
SCALE	SHEET	REV.								
1/1	1/1	B								
3 PLACE	± **	DRAW:								
2 PLACE	± 0.20	DESIGN: Lu陳惠枝	2019/11/21							
1 PLACE	± 0.30									
ANGLES	X° ± 3°									



B	MARK MODIFY ECN-19105 Δ =1	2019/11/21
A	NEW RELEASED	2017/05/31
REV.	DESCRIPTION	DATE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [Nextronics](#) manufacturer:

Other Similar products are found below :

[56F706-005-LI](#) [56F711-015](#) [LV242999-142T12](#) [015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-8544-011](#) [015-8755-001](#) [017041-0005](#)
[020419-0104](#) [020745-0008](#) [609-25P](#) [609-9P](#) [M24308/2-23Z](#) [CT0-24-10SC](#) [CT06E20-22SS](#) [CT0E20-8PS](#) [CT0E22-14SC](#) [CT0F16S-1PS](#)
[CT0F16S-1SC](#) [CT0FA22-1PS](#) [CT0FA22-1SS](#) [CT0M20-7PCAU](#) [CT0P14S-5SXS](#) [CT0P22-14PS](#) [CT0TA16-11SXCA232](#) [CT0U22-](#)
[14PSA206F127](#) [CT1F22-14PC-G9](#) [CT1FC22-2PC](#) [CT1N22-22SS](#) [CT2-10SL-3SC](#) [CT2-14S-2PCA34](#) [CT2-18-10PS-FMLB-D](#) [CT2-18-](#)
[11PCAU](#) [CT2-22-19SC](#) [CT2-22-19SS-A206](#) [CT2-24-28PSF127A206](#) [CT2-28-12SC](#) [CT2-28-12SCA232](#) [CT2-28-12SSA232](#) [CT6-10SL-3SC](#)
[CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6-16-12SC](#) [CT6-18-10PSA206](#) [CT6-18-10PSA232](#) [CT6-18-10SSF127A206](#) [CT6-20-15SSA232](#) [CT6-](#)
[9767-18-8-18-4SS](#) [CT6A16S-5PC](#)