


SPECIFICATION CONTROL DRAWING

55PC1231

TITLE <p style="text-align: center;">THREE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT</p>	Date <p style="text-align: center;">1-15-93</p>	Revision <p style="text-align: center;">B</p>
---	--	--

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

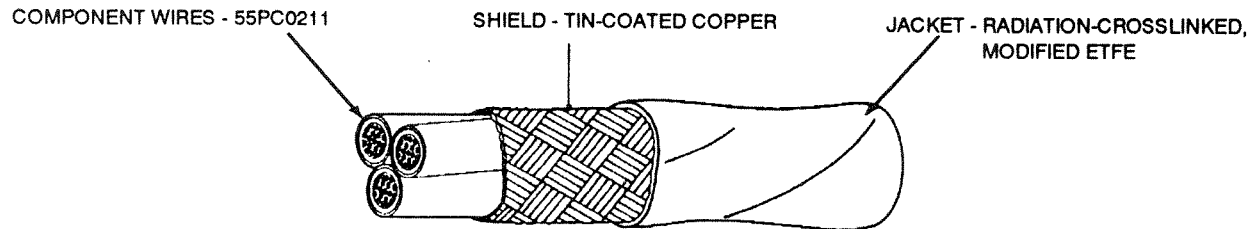

CONSTRUCTION DETAILS									
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1231-26-*	26	38	.0055	.0070	.102	.107	.112	9.89	10.39
55PC1231-24-*	24	38	.0060	.0075	.113	.118	.123	12.42	12.93
55PC1231-22-*	22	38	.0060	.0075	.126	.131	.136	16.05	16.62
55PC1231-20-*	20	38	.0060	.0075	.144	.149	.154	21.74	22.41
55PC1231-18-*	18	38	.0060	.0080	.166	.171	.176	29.93	30.81
55PC1231-16-*	16	38	.0060	.0080	.182	.187	.192	36.40	37.38
55PC1231-14-*	14	38	.0060	.0080	.214	.219	.224	52.21	53.41
55PC1231-12-*	12	38	.0060	.0080	.254	.260	.266	75.71	77.19
55PC1231-10-*	10	36	.0070	.0090	.311	.320	.329	118.63	121.46

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
VOLTAGE RATING: 600 volts (rms)
DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour
JACKET COLOR: White preferred
JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lb/in² (minimum)
JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)
VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 22, red, blue and yellow component wires; white jacket: 55PC1231-22-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 (415) 361 3333 TWX 910 373 1728

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [89842-002-1000](#) [6000FE-877-1000](#) [6120UL-002-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#) [6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#) [82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469 060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#)