

Miniature Aluminum Electrolytic Capacitors

NRE-JL Series

ULTRA LOW IMPEDANCE, RADIAL LEADS, POLARIZED, ALUMINUM ELECTROLYTIC

FEATURES


- VERY LOW IMPEDANCE & HIGH RIPPLE CURRENT
- LONG LIFE AT 105°C (4000 ~ 10,000 hrs.)
- HIGH STABILITY AT LOW TEMPERATURE
- IDEALLY FOR SWITCHING POWER SUPPLIES & CONVERTORS



CHARACTERISTICS

Rated Voltage Range	6.3 ~ 100Vdc									
Capacitance Range	1.0 ~ 15,000 μ F									
Operating Temperature Range	-40°C ~ +105°C									
Capacitance Tolerance	\pm 20% (M)									
Maximum Leakage Current After 2 Minutes at 20°C	0.01CV or 3 μ A whichever is greater									
Max. Tan δ at 120Hz/20°C	W.V. (Vdc)	6.3	10	16	25	35	50	63	100	
	S.V. (Vdc)	8	13	20	32	44	63	79	125	
	C \leq 1,000 μ F	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	
	C = 2,200 μ F	0.24	0.21	0.18	0.16	0.14	0.12	-	-	
	C = 3,300 μ F	0.26	0.23	0.20	0.18	0.16	-	-	-	
	C = 4,700 μ F	0.28	0.25	0.22	0.20	-	-	-	-	
	C = 6,800 μ F	0.32	0.29	0.26	-	-	-	-	-	
	C = 8,200 μ F	-	-	-	0.28	-	-	-	-	
Low Temperature Stability Impedance Ratio @ 120Hz	Z-25°C/Z+20°C	4	3	2	2	2	2	2	2	
	Z-40°C/Z+20°C	8	6	4	3	3	3	3	3	
Load Life Hours Load Life Test at Rated W.V. & 105°C	Case Diameter	Life Hours								
		6.3V to 10V				16V to 100V				
	ϕ 5mm	4,000				5,000				
	ϕ 6.3mm & ϕ 8mm	6,000				7,000				
	ϕ 10mm ~ ϕ 16mm	8,000				10,000				
	Capacitance Change	Within \pm 25% (6.3V \pm 30%) of initial measured value								
Tan δ	Less than 200% of specified value									
Leakage Current	Less than specified value									
Shelf Life Test 105°C 1,000 Hours No Load	Capacitance Change	Within \pm 25% of initial measured value								
	Tan δ	Less than 200% of specified value								
	Leakage Current	Less than specified value								

PART NUMBER SYSTEM

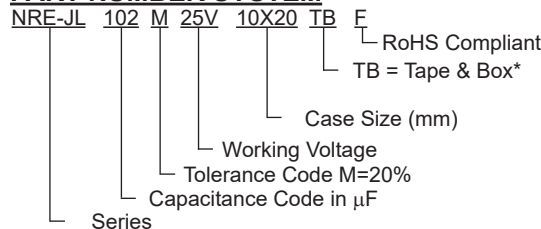

*see tape specification for details

PRECAUTIONS

Please review the notes on correct use, safety and precautions found at <https://www.niccomp.com/resource/files/aluminum/AlumApplInfoCautions.pdf>
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



STANDARD PRODUCT, SPECIFICATIONS AND CASE SIZES D ϕ x L (mm)

Part Number	Cap. (μ F)	W.V. (Vdc)	Dissipation Factor +20°C/120Hz	Ripple Current Rating (mA)rms +105°C/100KHz	Max. Z (Ω) 100KHz		Load Life Hours @+105°C
					+20°C	-10°C	
NRE-JL101M6.3V5X11F	100	6.3	0.22	150	0.90	3.6	4,000
NRE-JL221M6.3V5X11F	220		0.22	250	0.40	1.2	4,000
NRE-JL331M6.3V6.3X11F	330		0.22	340	0.22	0.87	6,000
NRE-JL471M6.3V6.3X11F	470		0.22	400	0.22	0.87	6,000
NRE-JL102M6.3V8X11.5F	1000		0.22	640	0.13	0.52	6,000
NRE-JL222M6.3V10X16F	2200		0.24	1300	0.062	0.25	8,000
NRE-JL332M6.3V10X20F	3300		0.26	1400	0.046	0.18	8,000
NRE-JL472M6.3V12.5X25F	4700		0.28	2230	0.032	0.11	8,000
NRE-JL682M6.3V12.5X25F	6800		0.32	2230	0.032	0.11	8,000
NRE-JL103M6.3V16X25F	10000		0.40	2930	0.021	0.060	8,000
NRE-JL153M6.3V16X35.5F	15000	0.50	3610	0.015	0.044	8,000	
NRE-JL101M10V5X11F	100	10	0.19	150	0.9	3.6	4,000
NRE-JL221M10V5X11F	220		0.19	250	0.4	1.2	4,000
NRE-JL331M10V6.3X11F	330		0.19	400	0.22	0.87	6,000
NRE-JL471M10V6.3X11F	470		0.19	400	0.22	0.87	6,000
NRE-JL102M10V10X12.5F	1000		0.19	865	0.080	0.32	8,000
NRE-JL222M10V10X20F	2200		0.21	1400	0.046	0.18	8,000
NRE-JL332M10V12.5X20F	3300		0.23	1900	0.041	0.14	8,000
NRE-JL472M10V12.5X25F	4700		0.25	2230	0.032	0.11	8,000
NRE-JL682M10V16X25F	6800		0.29	2930	0.021	0.060	8,000
NRE-JL103M10V16X31.5F	10000		0.37	3450	0.019	0.056	8,000
NRE-JL470M16V5X11F	47	16	0.16	250	0.40	1.2	5,000
NRE-JL101M16V5X11F	100		0.16	250	0.40	1.2	5,000
NRE-JL221M16V6.3X11F	220		0.16	400	0.22	0.87	7,000
NRE-JL331M16V6.3X11F	330		0.16	400	0.22	0.87	7,000
NRE-JL471M16V8X11.5F	470		0.16	640	0.13	0.52	7,000
NRE-JL102M16V10X16F	1000		0.16	1210	0.062	0.25	10,000
NRE-JL222M16V12.5X20F	2200		0.18	1900	0.041	0.14	10,000
NRE-JL332M16V12.5X25F	3300		0.20	2230	0.032	0.11	10,000
NRE-JL472M16V16X25F	4700		0.22	2930	0.021	0.060	10,000
NRE-JL682M16V16X31.5F	6800		0.26	3450	0.019	0.056	10,000
NRE-JL330M25V5X11F	33	25	0.14	250	0.40	1.2	5,000
NRE-JL470M25V5X11F	47		0.14	250	0.40	1.2	5,000
NRE-JL101M25V5X11F	100		0.14	250	0.40	1.2	5,000
NRE-JL221M25V6.3X11F	220		0.14	400	0.22	0.87	7,000
NRE-JL331M25V8X11.5F	330		0.14	640	0.13	0.52	7,000
NRE-JL471M25V10X12.5F	470		0.14	865	0.080	0.32	10,000
NRE-JL102M25V10X20F	1000		0.14	1400	0.046	0.18	10,000
NRE-JL222M25V12.5X25F	2200		0.16	2230	0.032	0.11	10,000
NRE-JL332M25V16X25F	3300		0.18	2930	0.021	0.060	10,000
NRE-JL472M25V16X31.5F	4700		0.20	3450	0.019	0.056	10,000
NRE-JL822M25V18X35.5F	8200	0.28	4280	0.014	0.480	10,000	
NRE-JL330M35V5X11F	33	35	0.12	250	0.40	1.2	5,000
NRE-JL470M35V5X11F	47		0.12	250	0.40	1.2	5,000
NRE-JL101M35V6.3X11F	100		0.12	400	0.22	0.87	7,000
NRE-JL221M35V8X11.5F	220		0.12	640	0.13	0.52	7,000
NRE-JL331M35V10X12.5F	330		0.12	865	0.080	0.32	10,000
NRE-JL471M35V10X16F	470		0.12	1210	0.062	0.25	10,000
NRE-JL102M35V12.5X20F	1000		0.12	1900	0.041	0.14	10,000
NRE-JL222M35V16X25F	2200		0.14	2930	0.021	0.060	10,000
NRE-JL332M35V16X31.5F	3300		0.16	3450	0.019	0.056	10,000
NRE-JL1R0M50V5X11F	1.0		50	0.10	30	4.0	8.0
NRE-JL2R2M50V5X11F	2.2	0.10		43	2.5	6.0	5,000
NRE-JL3R3M50V5X11F	3.3	0.10		53	2.2	5.6	5,000
NRE-JL4R7M50V5X11F	4.7	0.10		88	1.9	5.0	5,000
NRE-JL100M50V5X11F	10	0.10		100	1.5	4.0	5,000
NRE-JL220M50V5X11F	22	0.10		180	0.70	2.8	5,000
NRE-JL330M50V5X11F	33	0.10		250	0.70	2.8	5,000
NRE-JL470M50V6.3X11F	47	0.10		295	0.30	1.2	7,000
NRE-JL101M50V8X11.5F	100	0.10		555	0.17	0.68	7,000



STANDARD PRODUCT, SPECIFICATIONS AND CASE SIZES D φ x L (mm)

Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor +20°C/120Hz	Ripple Current Rating (mA rms) +105°C/100KHz	Max. Z (Ω) 100KHz		Load Life Hours @+105°C
					+20°C	-10°C	
NRE-JL221M50V10X16F	220	50	0.10	1050	0.084	0.34	10,000
NRE-JL331M50V10X20F	330		0.10	1220	0.06	0.24	10,000
NRE-JL471M50V12.5X20F	470		0.10	1660	0.045	0.15	10,000
NRE-JL102M50V16X25F	1000		0.10	2730	0.032	0.096	10,000
NRE-JL222M50V16X35.5F	2200		0.12	3150	0.019	0.057	10,000
NRE-JL100M63V5X11F	10	63	0.09	173	0.88	3.5	5,000
NRE-JL220M63V5X11F	22		0.09	173	0.88	3.5	5,000
NRE-JL330M63V6.3X11F	33		0.09	278	0.35	1.4	7,000
NRE-JL470M63V6.3X11F	47		0.09	278	0.35	1.4	7,000
NRE-JL101M63V10X12.5F	100		0.09	725	0.15	0.60	10,000
NRE-JL221M63V10X20F	220		0.09	1200	0.078	0.31	10,000
NRE-JL331M63V12.5X20F	330		0.09	1570	0.060	0.19	10,000
NRE-JL471M63V12.5X25F	470		0.09	1990	0.043	0.14	10,000
NRE-JL102M63V16X25F	1000		0.09	2730	0.032	0.096	10,000
NRE-JL1R0M100V5X11F	1.0		100	0.08	20	4.5	15.0
NRE-JL2R2M100V5X11F	2.2	0.08		30	3.0	13.0	5,000
NRE-JL3R3M100V5X11F	3.3	0.08		40	2.7	11.0	5,000
NRE-JL4R7M100V5X11F	4.7	0.08		65	2.5	10.0	5,000
NRE-JL100M100V6.3X11F	10	0.08		267	0.57	2.3	7,000
NRE-JL220M100V6.3X11F	22	0.08		267	0.57	2.3	7,000
NRE-JL330M100V8X11.5F	33	0.08		462	0.36	1.4	7,000
NRE-JL470M100V8X16F	47	0.08		585	0.25	1.0	7,000
NRE-JL101M100V10X20F	100	0.08		1040	0.12	0.52	10,000
NRE-JL221M100V12.5X25F	220	0.08		1620	0.060	0.23	10,000
NRE-JL331M100V16X25F	330	0.08		2210	0.044	0.16	10,000

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR


Frequency (Hz) 6.3V ~ 50V	120	1K	10K	≤100K
1.0 ~ 10	0.42	0.60	0.80	1.00
22 ~ 33	0.55	0.75	0.90	1.00
47 ~ 330	0.70	0.85	0.95	1.00
470 ~ 1,000	0.75	0.90	0.98	1.00
2,200 ~ 1,5000	0.80	0.95	1.00	1.00
Frequency (Hz) 63V ~ 100V	120	1K	10K	≤100K
All Cap Values	0.42	0.60	0.80	1.00

DIAMETER AND LEADSPACE (mm)

Case Dia. (Dφ)	5	6.3	8	10	12.5	16	18
Lead Dia. (dφ)	0.5	0.5	0.6	0.6	0.6	0.8	0.8
Lead Spacing (F)	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Dim. α	0.5	0.5	0.5	0.5	0.5	0.5	0.5

$\beta = L \leq 16\text{mm} = 1.5\text{mm}, L \geq 20\text{mm} = 2.0\text{mm}$

DIMENSIONS (mm)

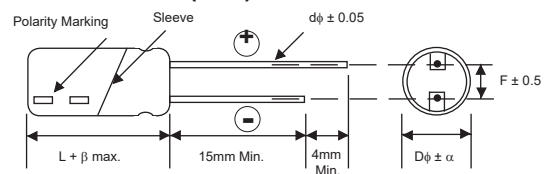

Drawing is representative of parts as supplied in bulk or straight lead format, please see taping specification for details on taped format packaging.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nic manufacturer](#):

Other Similar products are found below :

[NMC0603NPO0R6B50TRPF](#) [NMC0603NPO270J100TRPF](#) [NMC1206X5R226K6.3TRPLP2KF](#) [NRE-S100M25V4X7F](#) [NRE-
HS102M25V12.5X16F](#) [NRCA12F1001TRQYF](#) [NRC-S06F2212TRF](#) [NCD180J1KVNPOJTRF](#) [NRC-S06F1692TRF](#)
[NCD102M1KVZ5U.250STRF](#) [NTC-T105K20TRAF](#) [NMC-P1206X7R104K100TRPF](#) [NMC-H1206NPO471K1KVTRPLPF](#) [NML04J9N1TRF](#)
[NRSNA4I4J150TR40KF](#) [NCC0805F261HTRF](#) [NRWA470M35V6.3X11TBF](#) [NACE221M16V6.3X8TR13F](#) [NRSS332M50V18X35.5F](#)
[NDTM106K25F1TRF](#) [NACZ221M50V10X10.5TR13F](#) [NCM15X7R103K50F](#) [NCD103M1KVZ5UF](#) [NRSS682M25V18X35.5F](#)
[NEXC224Z5.5V10.5X8.5TRF](#) [NRLRW221M450V30X35SF](#) [NDTM225K50F2TRF](#) [NRSZ471M50V12.5X20F](#) [NTCL106K35TRDF](#)
[NRWA331M25V10X12.5F](#) [NRSY472M25V16X31.5F](#) [NEXS105Z5.5V28.5X14F](#) [NRLR181M400V25X30SF](#) [NRSZ102M25V12.5X20F](#)
[NUVA33T385TRF](#) [NUVA33V405TRF](#) [NRLMW331M250V30X25F](#) [NRLF103M25V35X20F](#) [NDTM106K35F](#) [NRLMW102M200V35X35F](#)
[NPIS43LS220MTRF](#) [NDTM476K35F2F](#) [NTC-T475K50TRDF](#) [NCD222M1KVZ5UKF](#) [NRLR472M63V25X40SF](#) [NTP157M10TRD\(40\)F](#)
[NPIM74C3R3MTRF](#) [NPI104C100MTRF](#) [NRLM102M100V25X25F](#) [NRLM223M50V 35X50F](#)