


- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
- HIGH TEMPERATURE RANGE (+125°C)
- LONG LIFE (4,000 HOURS)
- LOW ESR, HIGH RIPPLE CURRENT & LOW LEAKAGE
- 5x6.1 ~ 10x10.5mm CASE SIZES
- REFLOW SOLDERING RATED TO +260°C (ALL SIZES)
- **MEETS THE REQUIREMENTS OF AEC-Q200***

*Contact NIC for supporting test data

**High Temperature, Long Life
& Available with Wide
Anti-Vibration Terminations**



CHARACTERISTICS

Rated Voltage Range	25 ~ 63Vdc					
Rated Capacitance Range	10 ~ 330µF					
Operating Temp. Range	-55 ~ +125°C					
Capacitance Tolerance	±20% (M)					
Max. Leakage Current After 2 Minutes @ 20°C	Less than 0.01CV or 3µA whichever is greater					
Working and Surge Voltage Ratings	W.V. (Vdc)	25	35	50	63	
	S.V. (Vdc)	32	44	63	79	
Tan δ @ 120Hz/20°C		0.14	0.12	0.10	0.08	
Load Life Test @ +125°C and Rated Voltage	Test Duration	All Case Sizes: 4,000 Hours				
	Capacitance Change	Within ±30% of initial measured value				
	Tan δ	Less than 200% of specified max. value				
	ESR	Less than 200% of specified max. value				
	Leakage Current	Less than specified max. value				
	Low Temperature ESR after endurance test ESR @ 100KHz/-40°C	φ5x6.1	φ6.3x6.1	φ6.3x8	φ8x10.5	φ10x10.5
	2.0Ω	1.4Ω	0.8Ω	0.4Ω	0.3Ω	

STANDARD PRODUCTS AND CASE SIZES Dφ x L (mm)

PART NUMBER	Case Size (D X L) mm	Cap. (µF)	Working Voltage	Max. Tan δ 120Hz/20°C	Max. ESR (mΩ) @ 100KHz/20°C	Max. Ripple Current (mA rms) @ 100KHz/125°C	Load Life Hours (+125°C)
NSPE-Z330M25V5X6.1NLBYF	5X6.1	33	25	0.14	80	550	4,000
NSPE-Z560M25V6.3X6.1NLBYF	6.3X6.1	56		0.14	50	900	4,000
NSPE-Z101M25V6.3X8NLBYF	6.3x8	100		0.14	30	1400	4,000
NSPE-Z221M25V8X10.5NLBYF	8x10.5	220		0.14	27	1600	4,000
NSPE-Z331M25V10X10.5NLBYF	10x10.5	330		0.14	20	2000	4,000
NSPE-Z220M35V5X6.1NLBYF	5X6.1	22	35	0.12	100	550	4,000
NSPE-Z470M35V6.3X6.1NLBYF	6.3X6.1	47		0.12	60	900	4,000
NSPE-Z680M35V6.3X8NLBYF	6.3x8	68		0.12	35	1400	4,000
NSPE-Z151M35V8X10.5NLBYF	8x10.5	150		0.12	27	1600	4,000
NSPE-Z271M35V10X10.5NLBYF	10x10.5	270		0.12	20	2000	4,000
NSPE-Z100M50V5X6.1NLBYF	5X6.1	10	50	0.10	120	500	4,000
NSPE-Z220M50V6.3X6.1NLBYF	6.3X6.1	22		0.10	80	750	4,000
NSPE-Z330M50V6.3X8NLBYF	6.3X8	33		0.10	40	1100	4,000
NSPE-Z680M50V8X10.5NLBYF	8X10.5	68		0.10	30	1250	4,000
NSPE-Z101M50V10X10.5NLBYF	10X10.5	100		0.10	28	1600	4,000
NSPE-Z100M63V6.3X6.1NLBYF	6.3X6.1	10	63	0.08	120	700	4,000
NSPE-Z220M63V6.3X8NLBYF	6.3X8	22		0.08	80	900	4,000
NSPE-Z330M63V8X10.5NLBYF	8X10.5	33		0.08	40	1100	4,000
NSPE-Z560M63V10X10.5NLBYF	10X10.5	56		0.08	30	1400	4,000


For Automotive Applications See Part Numbering System

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR

Frequency	120Hz	1KHz	10KHz	≥100KHz
Correction Factor	0.10	0.30	0.60	1.00





PART NUMBER SYSTEM

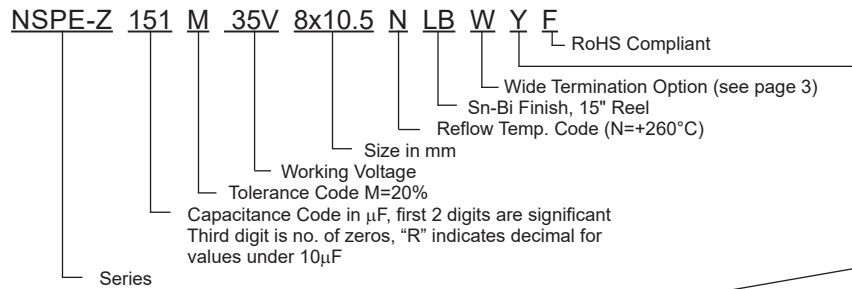


Suitable for automotive equipment, sourced to special production and inspection at IATF-16949 certified production site

DIMENSIONS (mm)

Case Size	D ϕ ± 0.5	L max.	A, B ± 0.2	W	I ± 0.3	P ± 0.2
5x6.1	5	6.1	5.3	0.55 ~ 0.75	2.2	1.5
6.3x6.1	6.3	6.1	6.6	0.55 ~ 0.75	2.6	1.8
6.3x8	6.3	8.0	6.6	0.55 ~ 0.75	2.6	1.8
8x10.5	8.0	10.5	8.3	0.7 ~ 1.1	3.4	3.1
10x10.5	10	10.5	10.3	0.7 ~ 1.1	3.5	4.6



Part Marking

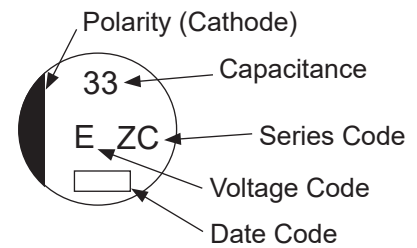


VOLTAGE RATING CODES

Code	Voltage Rating
E	25V
V	35V
H	50V
J	63V

LAND PATTERN DIM. (mm)

Case Dia.	a	b	c
5	1.5	2.8	1.6
6.3	1.8	3.2	1.6
8	3.1	4.0	2.0
10	4.6	4.1	2.0

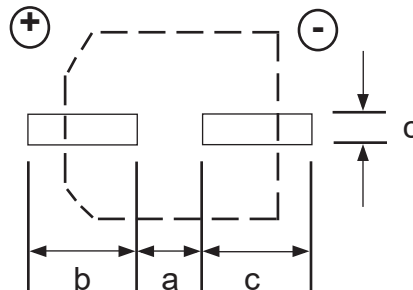

PRECAUTIONS

Please review the notes on correct use, safety and precautions found at <https://www.niccomp.com/resource/files/aluminum/AlumApplInfoCautions.pdf>
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



WIDE TERMINATION DIM. (mm)




Case Size	D ϕ \pm 0.5	L max.	A, B	C max.	P	W	R	T
6.3x6.1	6.3	6.4	6.6 \pm 0.2	7.8	(2.2)	0.65 \pm 0.1	(1.3 \pm 0.2)	3.0 \pm 0.2
6.3x8	6.3	8.3	6.6 \pm 0.2	7.8	(2.2)	0.65 \pm 0.1	(1.3 \pm 0.2)	3.0 \pm 0.2
8 x 10.5WT	8.0	10.8	8.3 \pm 0.2	10.0	(3.1)	1.2 \pm 0.2	0.7 \pm 0.2	1.3 \pm 0.2
10 x 10.5WT	10.0	10.8	10.3 \pm 0.2	12.0	(4.6)	1.2 \pm 0.2	0.7 \pm 0.2	1.3 \pm 0.2

(Reference dimensions)


WIDE TERMINATION LAND PATTERN DIM. (mm)

Case Size	a	b	c
6.3x6.1	1.2	3.6	3.2
6.3x8	1.2	3.6	3.2
8x10.5	2.7	4.0	4.7
10x10.5	3.9	4.4	4.7

6.3mm DIAMETER WT STYLE TERMINATION

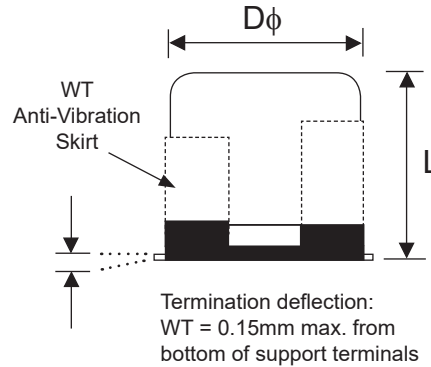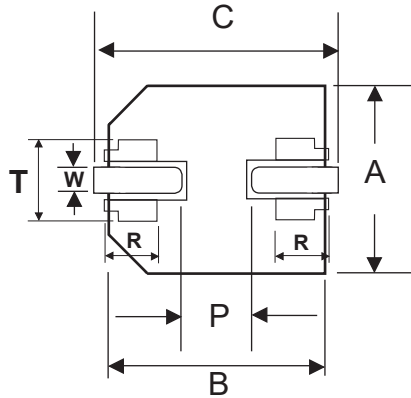


8 & 10mm DIAMETER WT STYLE TERMINATION

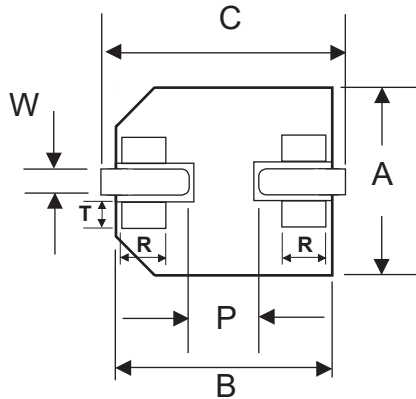

W (Wide Terminations) Anti-Vibration Test	
Test Method	Direction: X, Y, Z axis Frequency & Duration: 5 to 2000Hz reciprocation for 20 minutes, 2 hours each direction Peak to Peak Amplitude: 5mm Peak Acceleration: 30G Sweep Type: Log
Δ Capacitance	Within \pm 10% of initial value
Tangent of Loss	\leq Specified value
Leakage Current	\leq Specified value

RECOMMENDED REFLOW SOLDERING PROFILE*

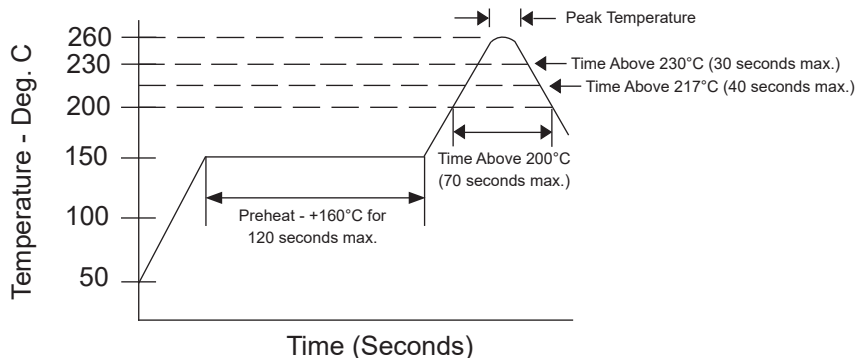

PEAK TEMPERATURE AND DURATION


Diameter	Peak Temperature	Time	Time above 230°C	Time above 217°C	# of Reflow Passes
φ5 ~ 6.3mm	+260°C	≥+250°C 5 sec.	30 sec. max.	40 sec. max.	2
	+255°C	≥+250°C 10 sec.			2
φ8 ~ 10mm	+260°C	≥+250°C 5 sec.	30 sec. max.	40 sec. max.	1
	+245°C	≥+240°C 10 sec.			2

*Two reflow passes are permissible with a cool down to room temperature required between the first and second pass. Acceptable soldering methods are IR or IR & heated air.

TAPING SPECIFICATIONS (mm)


- Both Leader and Trailer tape: Minimum 40mm (1.57") empty carrier tape pockets.
- Leader tape: Approximately 20cm of cover tape at leader.
- Connection: Maximum 3 connections (slices) per reel.

Case Size	A	B	C	D	P	T	t
5x6.1	±0.5	±0.5	±0.3	±0.1	±0.1	±0.2	max.
6.3x6.1	7.0	7.0	12.0	5.5	12.0	6.4	0.4
6.3x8	7.0	7.0	16.0	7.5	12.0	8.5	0.4
8x10.5	8.7	8.7	24.0	11.5	16.0	11.0	0.4
10x10.5	10.7	10.7	24.0	11.5	16.0	11.0	0.4

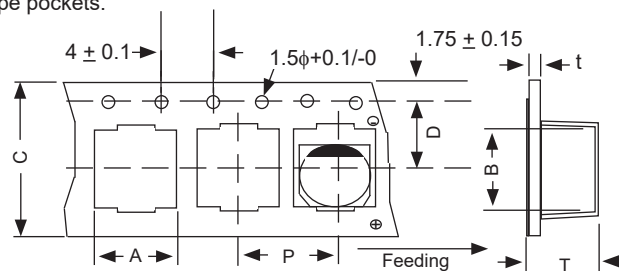

REEL DIMENSIONS (mm)

Case Size	W ±1.0	Qty per Reel
		15" (380mm)
5x6.1	14	1,000
6.3x6.1	18	1,000
6.3x8	18	900
8x10.5	26	500
10x10.5	26	500

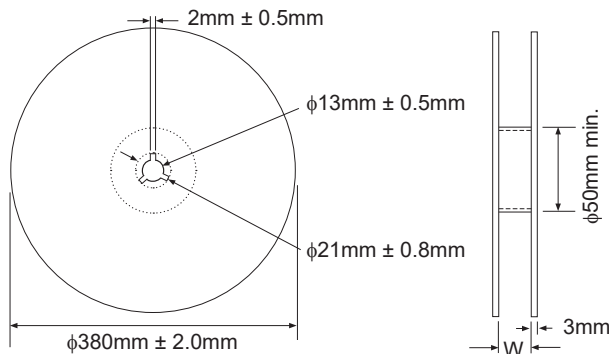

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nic manufacturer](#):

Other Similar products are found below :

[NMC0603NPO0R6B50TRPF](#) [NMC0603NPO270J100TRPF](#) [NMC1206X5R226K6.3TRPLP2KF](#) [NRE-S100M25V4X7F](#) [NRE-
HS102M25V12.5X16F](#) [NRCA12F1001TRQYF](#) [NRC-S06F2212TRF](#) [NCD180J1KVNPOJTRF](#) [NRC-S06F1692TRF](#)
[NCD102M1KVZ5U.250STRF](#) [NTC-T105K20TRAF](#) [NMC-P1206X7R104K100TRPF](#) [NMC-H1206NPO471K1KVTRPLPF](#) [NML04J9N1TRF](#)
[NRSNA4I4J150TR40KF](#) [NCC0805F261HTRF](#) [NRWA470M35V6.3X11TBF](#) [NACE221M16V6.3X8TR13F](#) [NRSS332M50V18X35.5F](#)
[NDTM106K25F1TRF](#) [NACZ221M50V10X10.5TR13F](#) [NCM15X7R103K50F](#) [NCD103M1KVZ5UF](#) [NRSS682M25V18X35.5F](#)
[NEXC224Z5.5V10.5X8.5TRF](#) [NRLRW221M450V30X35SF](#) [NDTM225K50F2TRF](#) [NEXT105Z5.5V21.5X13F](#) [NRSZ471M50V12.5X20F](#)
[NTCL106K35TRDF](#) [NRWA331M25V10X12.5F](#) [NRSY472M25V16X31.5F](#) [NEXS105Z5.5V28.5X14F](#) [NRLR181M400V25X30SF](#)
[NRSZ102M25V12.5X20F](#) [NUVA33T385TRF](#) [NUVA33V405TRF](#) [NRLMW331M250V30X25F](#) [NRLF103M25V35X20F](#) [NDTM106K35F](#)
[NRLMW102M200V35X35F](#) [NPIS43LS220MTRF](#) [NDTM476K35F2F](#) [NTC-T475K50TRDF](#) [NCD222M1KVZ5UKF](#)
[NRLR472M63V25X40SF](#) [NTP157M10TRD\(40\)F](#) [NPIM74C3R3MTRF](#) [NPI104C100MTRF](#) [NRLM102M100V25X25F](#)