

ELECTRIC DOUBLE LAYER CAPACITORS "EVerCAP®"

nichicon

JJD

Screw Terminal Type, High Energy Density Type



- High energy density.
- Suitable for electric power storage.
- Compliant to the RoHS directive (2011/65/EU),(EU)2015/863).




■ Specifications

Item	Performance Characteristics		
Category Temperature Range	– 25 to +60°C		
Rated Voltage Range	2.5V		
Rated Capacitance Range	1000 to 2500F See Note		
Capacitance Tolerance	$\pm 20\%$, 20°C		
Stability at Temperature	Capacitance (-25°C) / Capacitance ($+20^\circ\text{C}$) $\times 100 \geq 70\%$ DCR (-25°C) / DCR($+20^\circ\text{C}$) ≤ 7		
DCR*	Refer to the table below (20°C). *DC internal resistance		
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 60°C .	Capacitance change	Within $\pm 30\%$ of the initial capacitance value
		DCR	300% or less than the initial specified value
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after storing the capacitors under no load for 2000 hours at 60°C .	Capacitance change	Within $\pm 30\%$ of the initial capacitance value
		DCR	300% or less than the initial specified value
Humidity Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 500 hours at 40°C 90%RH.	Capacitance change	Within $\pm 30\%$ of the initial capacitance value
		DCR	300% or less than the initial specified value
Marking	Printed with white color letter on black sleeve.		

■ Drawing

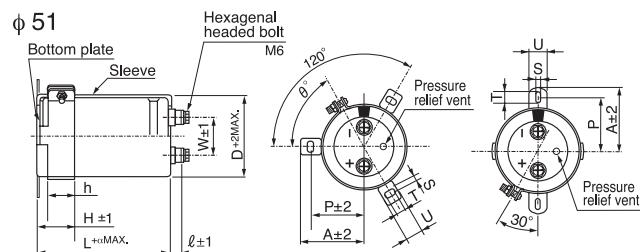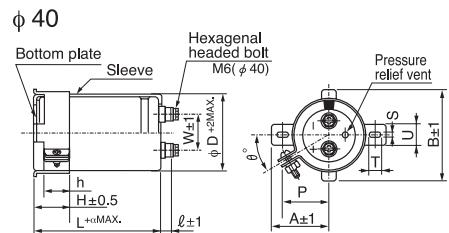

Type numbering system (Example : 2.5V 1000F)

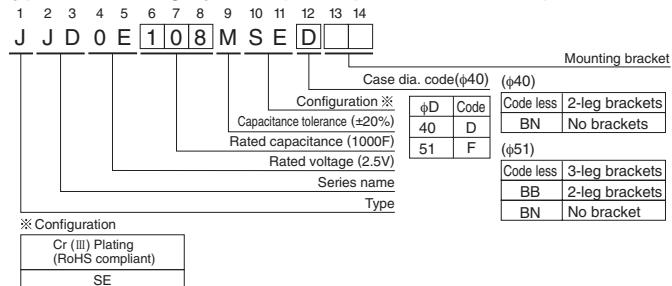

Note :

The capacitance calculated from discharge time (ΔT) with constant current (i) after 30 minute charge with rated voltage (2.5V).
The discharge current (i) is $0.01 \times$ rated capacitance (F).
The discharge time (ΔT) measured between 2V and 1V with constant current.
The capacitance calculated below.
 $\text{Capacitance (F)} = i \times \Delta T$

- Dimensions of terminal pitch(W) and length(ℓ) and Normal dia. of bolt (mm)

φ D	W	ℓ	α	Nominal of bolt
40	18.8	9	3	M6
51	26.0	10	3	M6

■ Dimensions

Rated Voltage (Code)	Cap. (F)	Cap. code	DCR* Typical (mΩ)	Case size		Ref. Weight (g)
				φ (mm)	L (mm)	
2.5V (0E)	1000	108	8.0	40	105	210
	1300	138	6.0		135	250
	2300	238	4.0	51	135	450
	2500	258	3.5		142	500

* The listed DCR value is typical and therefore not a guaranteed value.

- Dimensions of mounting bracket (mm)

Symbol	3-Legs		2-Legs	
	φD	P	40	51
P	32.5	32	27	33.2
A	38.5	32	40	
B	—	48	—	
T	7.5	7.0	6.0	
S	5.0	3.5	4.5	
U	12	10	14	
θ°	60	45	30	
H	20	17	25	
h	15	12	15	

Note) The brackets will be supplied in the separate box.

CAT.8100J

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Supercapacitors / Ultracapacitors category:

Click to view products by Nichicon manufacturer:

Other Similar products are found below :

[C-TEC1225 P](#) [SCCY73B407SLBLE](#) [CDCL3000C0-002R85STB](#) [MDCM0058C0-0016R0TBZ](#) [FE0H473ZF](#) [MAL223551012E3](#)
[MAL223551014E3](#) [MAL223551015E3](#) [MAL223551016E3](#) [MAL223551006E3](#) [MAL223551007E3](#) [MAL223551001E3](#) [MAL223551008E3](#)
[MAL219612474E3](#) [MAL219632473E3](#) [DRE10/2.5](#) [DRL106S0TI25RRDAP](#) [DRL226S0TK25RR](#) [106DCN2R7M](#) [SCCT30B156SRB](#)
[SCMR14C474MSBA0](#) [SCMR22C155MSBA0](#) [GW209F](#) [TV1020-3R0605-R](#) [SCCX50B207VSB](#) [PAS0815LS2R5105](#) [HVZ0E475NF](#)
[SCMR18F105PSBA0](#) [FT0H565ZF](#) [FE0H224ZF](#) [SCCT30E156SRB](#) [MAL222090006E3](#) [SCCY68B407SSBLE](#) [CPH3225A-2K](#)
[SCMT22C505PRBA0](#) [207DCN2R7M](#) [DB5U307W35050HA](#) [DB5U407W35060HA](#) [DGH505Q5R5](#) [DGH305Q2R7](#) [DGH505Q2R7](#)
[DGH705Q2R7](#) [DGH506Q2R7](#) [DGH335Q2R7](#) [DGH256Q2R7](#) [DGH255Q5R5](#) [DGH207Q2R7](#) [DGH155Q5R5](#) [DGH107Q2R7](#) [107DCN2R7Q](#)