


ALUMINUM ELECTROLYTIC CAPACITORS

UBY


High Temperature Range,
For +125°C or 135°C Use



Expanded

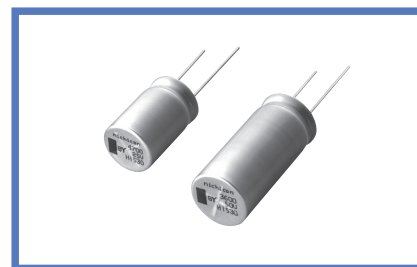

- Higher capacitance and higher ripple current than UBT and UBW.
- Ideal for automobile control circuits such as electric power steering and direct injection engine drive.
- Compliant to the RoHS directive(2011/65/EU).







Specifications

Item	Performance Characteristics																										
Category Temperature Range	-40 to +135°C																										
Rated Voltage Range	25 to 100V																										
Rated Capacitance Range	160 to 12000μF																										
Capacitance Tolerance	±20% at 120Hz, 20°C																										
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV (μA)																										
Tangent of loss angle (tan δ)	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> <td rowspan="2">120Hz, 20°C</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> </tr> </table>	Rated voltage (V)	25	35	50	63	80	100	120Hz, 20°C	tan δ (MAX.)	0.14	0.12	0.10	0.10	0.08	0.08											
	Rated voltage (V)	25	35	50	63	80	100	120Hz, 20°C																			
tan δ (MAX.)	0.14	0.12	0.10	0.10	0.08	0.08																					
For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.																											
Stability at Low Temperature	<table border="1"> <tr> <td colspan="2">Rated voltage (V)</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> <td>120Hz</td> </tr> <tr> <td rowspan="2">Impedance ratio ZT / Z20 (MAX.)</td> <td>Z-25°C / Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> </tr> </table>	Rated voltage (V)		25	35	50	63	80	100	120Hz	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	2	2	2	2	2	2	2	Z-40°C / Z+20°C	4	4	4	4	4	4	4
	Rated voltage (V)		25	35	50	63	80	100	120Hz																		
Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	2	2	2	2	2	2	2																			
	Z-40°C / Z+20°C	4	4	4	4	4	4	4																			
Endurance	<table border="1"> <tr> <td>Rated voltage (V)</td> <td colspan="3">25 to 50V</td> <td colspan="4">63 to 100V</td> </tr> <tr> <td>—</td> <td colspan="4">The specifications listed below shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 125°C or 135°C, the peak voltage shall not exceed the rated voltage.</td> <td colspan="4">The specifications listed below shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 125°C or 2000 hours at 135°C, the peak voltage shall not exceed the rated voltage.</td> </tr> </table>	Rated voltage (V)	25 to 50V			63 to 100V				—	The specifications listed below shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 125°C or 135°C, the peak voltage shall not exceed the rated voltage.				The specifications listed below shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 125°C or 2000 hours at 135°C, the peak voltage shall not exceed the rated voltage.												
	Rated voltage (V)	25 to 50V			63 to 100V																						
	—	The specifications listed below shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 125°C or 135°C, the peak voltage shall not exceed the rated voltage.				The specifications listed below shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 125°C or 2000 hours at 135°C, the peak voltage shall not exceed the rated voltage.																					
Capacitance change	Within ±30% of the initial capacitance value																										
tan δ	300% or less than the initial specified value																										
Leakage current	Less than or equal to the initial specified value																										
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																										
Marking	Black print on the case top.																										

The UBY series places emphasis on high ripple current, as a result the lifetime calculation is different than other series. Please contact Nichicon for details.

Radial Lead Type

Type numbering system (Example : 25V 12000μF)

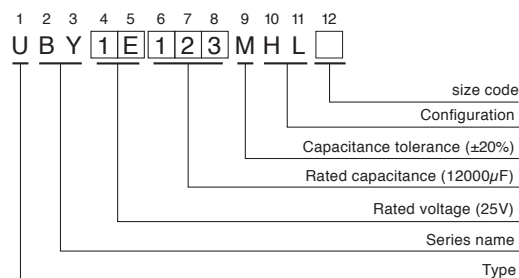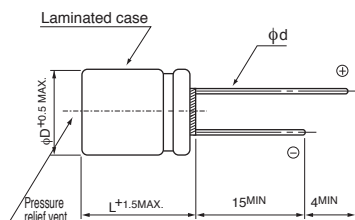

(mm)

φD	12.5	16	18
P	5.0	7.5	7.5
φd	0.6※	0.8	0.8

※ In case L > 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

• Dimension table in next page.

Design, Specifications are subject to change without notice.

ALUMINUM ELECTROLYTIC CAPACITORS

UBY

■ Dimensions

V (Code)		25(1E)					35(1V)				
Cap.(μ F)	Item Code	Case size ϕ D \times L (mm)	ESR (Ω) MAX.		Rated ripple (mArms)		Case size ϕ D \times L (mm)	ESR (Ω) MAX.		Rated ripple (mArms)	
			20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz		20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz
1300	132						12.5 \times 20	0.042	0.48	2760	1690
1800	182						12.5 \times 25	0.033	0.30	3480	2010
2000	202	12.5 \times 20	0.042	0.48	2760	1690					
2200	222						12.5 \times 31.5	0.028	0.24	4490	2900
							▲16 \times 20	0.031	0.27	3040	1860
2700	272						12.5 \times 35.5	0.025	0.21	5140	3190
							▲18 \times 20	0.030	0.22	3250	1870
3000	302	12.5 \times 25	0.033	0.30	3480	2010	16 \times 25	0.026	0.22	4260	2870
3300	332	16 \times 20	0.031	0.27	3040	1860	12.5 \times 40	0.024	0.19	5810	3470
3600	362	12.5 \times 31.5	0.028	0.24	4490	2900					
3900	392						16 \times 31.5	0.023	0.18	5480	3400
							▲18 \times 25	0.025	0.19	4500	2900
4300	432	18 \times 20	0.030	0.22	3250	1870					
4700	472	16 \times 25	0.026	0.22	4260	2870	16 \times 35.5	0.020	0.14	6070	3630
5100	512	12.5 \times 40	0.024	0.19	5810	3470	18 \times 31.5	0.022	0.16	5600	3470
5600	562						16 \times 40	0.019	0.12	6810	3930
6200	622	16 \times 31.5	0.023	0.18	5480	3400	18 \times 35.5	0.019	0.12	6280	3750
		▲18 \times 25	0.025	0.19	4500	2900					
7500	752	16 \times 35.5	0.020	0.14	6070	3630	18 \times 40	0.018	0.10	7070	4080
8200	822	18 \times 31.5	0.022	0.16	5600	3470					
9100	912	16 \times 40	0.019	0.12	6810	3930					
10000	103	18 \times 35.5	0.019	0.12	6280	3750					
12000	123	18 \times 40	0.018	0.10	7070	4080					

V (Code)		50 (1H)					63 (1J)				
Cap.(μ F)	Item Code	Case size ϕ D \times L (mm)	ESR (Ω) MAX.		Rated ripple (mArms)		Case size ϕ D \times L (mm)	ESR (Ω) MAX.		Rated ripple (mArms)	
			20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz		20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz
390	391						12.5 \times 20	0.074	0.56	1640	1420
560	561						12.5 \times 25	0.054	0.39	2520	2050
620	621	12.5 \times 20	0.056	0.88	2400	1470					
750	751						12.5 \times 31.5	0.042	0.30	3110	2630
							▲16 \times 20	0.053	0.34	2140	1910
820	821	12.5 \times 25	0.044	0.67	3350	2260					
950	951						12.5 \times 35.5	0.038	0.25	3760	2970
							▲18 \times 20	0.048	0.26	2350	2100
1000	102	16 \times 20	0.039	0.55	2960	1870	16 \times 25	0.038	0.23	2940	2680
1100	112	12.5 \times 31.5	0.037	0.52	4220	2520	12.5 \times 40	0.031	0.22	4610	3260
1300	132	12.5 \times 35.5	0.033	0.44	4810	2780	16 \times 31.5	0.034	0.20	3860	3050
		▲16 \times 25	0.033	0.44	4040	2500	▲18 \times 25	0.035	0.19	3080	2810
		※18 \times 20	0.038	0.44	3130	2110					
1600	162	12.5 \times 40	0.032	0.36	5240	3020					
1700	172						16 \times 35.5	0.027	0.15	4590	3420
1800	182	16 \times 31.5	0.029	0.36	5130	2960	18 \times 31.5	0.028	0.15	4080	3220
		▲18 \times 25	0.032	0.32	4230	2530					
2000	202						16 \times 40	0.025	0.14	5190	3670
2200	222	16 \times 35.5	0.025	0.27	5480	3160	18 \times 35.5	0.023	0.12	5220	3690
2400	242	18 \times 31.5	0.028	0.25	5240	3020					
2500	252						18 \times 40	0.021	0.11	5660	3820
2700	272	16 \times 40	0.024	0.22	5930	3420					
3000	302	18 \times 35.5	0.024	0.20	5870	3390					
3600	362	18 \times 40	0.023	0.16	6420	3700					

▲ : In this case, 6 will be put at 12th digit of type numbering system.

※ : In this case, 3 will be put at 12th digit of type numbering system.

Design, Specifications are subject to change without notice.

ALUMINUM ELECTROLYTIC CAPACITORS

UBY

■ Dimensions

Cap.(μ F)	V (Code)	Item	80 (1K)				100 (2A)					
			Case size ϕ D \times L (mm)	ESR (Ω) MAX.		Rated ripple (mA rms)		Case size ϕ D \times L (mm)	ESR (Ω) MAX.		Rated ripple (mA rms)	
				20°C/100kHz	-40°C/100kHz	125°C/100kHz	135°C/100kHz		20°C/100kHz	-40°C/100kHz	125°C/100kHz	135°C/100kHz
160	161						12.5 \times 20	0.074	0.56	1640	1420	
220	221						12.5 \times 25	0.054	0.39	2520	2050	
270	271	12.5 \times 20	0.074	0.56	1640	1420	16 \times 20	0.053	0.34	2140	1910	
300	301						12.5 \times 31.5	0.042	0.30	3110	2630	
360	361						12.5 \times 35.5	0.038	0.25	3760	2970	
							▲18 \times 20	0.048	0.26	2350	2100	
390	391	12.5 \times 25	0.054	0.39	2520	2050	16 \times 25	0.038	0.23	2940	2680	
430	431						12.5 \times 40	0.031	0.22	4610	3260	
470	471	16 \times 20	0.053	0.34	2140	1910	16 \times 31.5	0.034	0.20	3860	3050	
510	511	12.5 \times 31.5	0.042	0.30	3110	2630	18 \times 25	0.035	0.19	3080	2810	
560	561						16 \times 35.5	0.027	0.15	4590	3420	
620	621	12.5 \times 35.5	0.038	0.25	3760	2970						
		▲18 \times 20	0.048	0.26	2350	2100						
680	681	16 \times 25	0.038	0.23	2940	2680	18 \times 31.5	0.028	0.15	4080	3220	
750	751	12.5 \times 40	0.031	0.22	4610	3260	16 \times 40	0.025	0.14	5190	3670	
820	821	16 \times 31.5	0.034	0.20	3860	3050	18 \times 35.5	0.023	0.12	5220	3690	
		▲18 \times 25	0.035	0.19	3080	2810						
950	951						18 \times 40	0.021	0.11	5660	3820	
1000	102	16 \times 35.5	0.027	0.15	4590	3420						
1100	112	18 \times 31.5	0.028	0.15	4080	3220						
1300	132	16 \times 40	0.025	0.14	5190	3670						
		▲18 \times 35.5	0.023	0.12	5220	3690						
1600	162	18 \times 40	0.021	0.11	5660	3820						

▲: In this case, 6 will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Cap. (μ F)	Frequency	120Hz	1kHz	10kHz	100kHz or more
160		0.40	0.75	0.90	1.00
220 to 620		0.50	0.85	0.94	1.00
680 to 2000		0.60	0.87	0.95	1.00
2200 to 4300		0.75	0.90	0.95	1.00
4700 to 12000		0.85	0.95	0.98	1.00

Design, Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Nichicon](#) manufacturer:

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#) [EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#)
[EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#) [ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#)
[EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [MEA562M2G--D130](#) [35YXA330MEFC10X12.5](#) [ELXZ630ELL221MJ25S](#)
[ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#) [LKMD1401H221MF](#) [B41888G6108M000](#)
[EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [510D476M035CC3DE3](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)