

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon



Chip Type, Low Impedance
series




- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).



■ Specifications

Item	Performance Characteristics																																																	
Category Temperature Range	-55 to +105°C																																																	
Rated Voltage Range	6.3 to 100V																																																	
Rated Capacitance Range	1 to 3300F																																																	
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C																																																	
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01 CV or 3 (μ A), whichever is greater.																																																	
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> </tr> </tbody> </table>										Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tan δ (MAX.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07																				
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																																									
tan δ (MAX.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07																																									
	For capacitance of more than 1000 μ F, add 0.02 for every increase of 1000 μ F.																																																	
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Z-25°C / Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z-55°C / Z+20°C</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>										Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	Z-25°C / Z+20°C	2	2	2	2	2	2	2	2	2	Z-40°C / Z+20°C	3	3	3	3	3	3	3	3	3	Z-55°C / Z+20°C	4	4	3	3	3	3	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																																									
Z-25°C / Z+20°C	2	2	2	2	2	2	2	2	2																																									
Z-40°C / Z+20°C	3	3	3	3	3	3	3	3	3																																									
Z-55°C / Z+20°C	4	4	3	3	3	3	3	3	3																																									
Endurance	<table border="1"> <tr> <td>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for L < 10 mm: 50V or less, and for L \leq 10mm: 63V or more) at 105°C.</td> <td>Capacitance Change</td> <td>Within $\pm 30\%$ of the initial capacitance value</td> </tr> <tr> <td></td> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td></td> <td></td> <td>300% or less than the initial specified value for 63V or more</td> </tr> <tr> <td></td> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>										The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for L < 10 mm: 50V or less, and for L \leq 10mm: 63V or more) at 105°C.	Capacitance Change	Within $\pm 30\%$ of the initial capacitance value		tan δ	200% or less than the initial specified value			300% or less than the initial specified value for 63V or more		Leakage current	Less than or equal to the initial specified value																												
The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for L < 10 mm: 50V or less, and for L \leq 10mm: 63V or more) at 105°C.	Capacitance Change	Within $\pm 30\%$ of the initial capacitance value																																																
	tan δ	200% or less than the initial specified value																																																
		300% or less than the initial specified value for 63V or more																																																
	Leakage current	Less than or equal to the initial specified value																																																
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																																																	
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.																																																	
Marking	Black print on the case top.																																																	

■ Chip Type

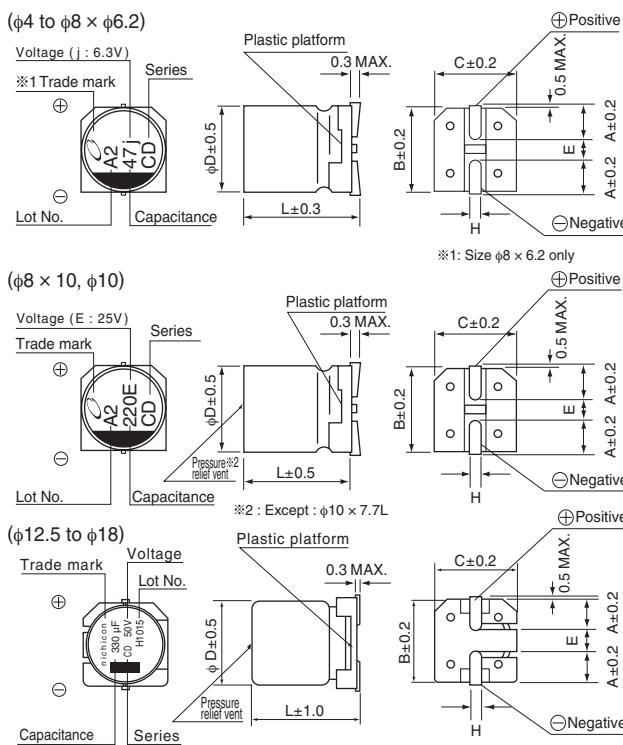


※Ø8 x 10L, Ø10 x 10L, Ø12.5 x 13.5L, Ø16 x 16.5L, Ø18 x 16.5L :

The vibration structure-resistant product is also available upon request, please ask for details.

● Dimension table in next page.

Type numbering system (Example : 16V 100 μ F)

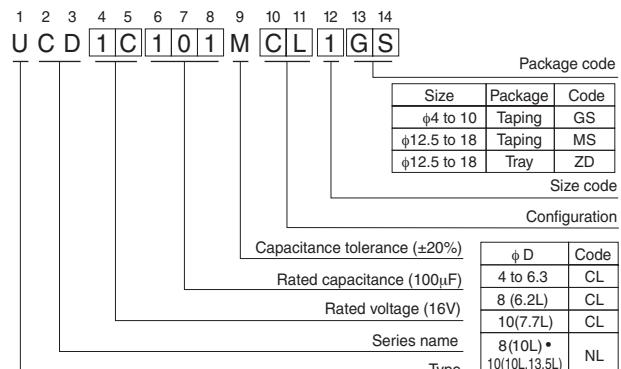

$\frac{1}{2}D \times L$	4 x 5.8	5 x 5.8	6.3 x 5.8	6.3 x 7.7	8 x 6.2	8 x 10	10 x 7.7	10 x 10	(mm)
A	1.8	2.1	2.4	2.4	3.3	2.9	3.2	3.2	
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5	4.5	
L	5.8	5.8	5.8	7.7	6.2	10	7.7	10	
H	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1					

$\frac{1}{2}D \times L$	10 x 13.5	12.5 x 13.5	16 x 16.5	18 x 16.5
A	3.2	4.8	5.4	6.4
B	10.3	13.6	17.1	19.1
C	10.3	13.6	17.1	19.1
E	4.5	4.0	6.3	6.3
L	13.5	13.5	16.5	16.5
H	0.8 to 1.1	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4

Voltage

V	6.3	10	16	25	35	50	63	80	100
Code	j	A	C	E	V	H	J	K	2A

CAT.8100D

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

CD series

Dimensions

Cap. (μF)	V	6.3			10			16			25			35			50		
		Code	0J		1A		1C		1E		1V		1H		1H		1H		
1	010																4 × 5.8	2.70	60
2.2	2R2																4 × 5.8	2.70	60
3.3	3R3																4 × 5.8	2.70	60
4.7	4R7																4 × 5.8	1.35	90
10	100							4 × 5.8	1.35	90	4 × 5.8	1.35	90	● 4 × 5.8	1.35	90	● 5 × 5.8	1.50	90
														5 × 5.8	0.70	160	6.3 × 5.8	0.86	170
15	150							4 × 5.8	1.35	90	5 × 5.8	0.70	160						
22	220	4 × 5.8	1.35	90	4 × 5.8	1.35	90	● 4 × 5.8	1.35	90	5 × 5.8	0.70	160	5 × 5.8	0.70	160	6.3 × 5.8	0.86	170
								5 × 5.8	0.70	160									
27	270	4 × 5.8	1.35	90	5 × 5.8	0.70	160	5 × 5.8	0.70	160	6.3 × 5.8	0.36	240						
33	330	5 × 5.8	0.70	160	● 4 × 5.8	1.35	90	6.3 × 5.8	0.36	240	● 5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 7.7	0.66	195
					5 × 5.8	0.70	160				6.3 × 5.8	0.36	240				● 8 × 6.2	0.63	200
47	470	● 4 × 5.8	1.35	90	6.3 × 5.8	0.36	240	● 5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.66	195
								6.3 × 5.8	0.36	240							● 8 × 6.2	0.63	200
56	560	5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240						
68	680	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290			
100	101	● 5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	● 6.3 × 7.7	0.32	290	8 × 10	0.32	350
					6.3 × 5.8	0.36	240				● 8 × 6.2	0.26	300	8 × 10	0.16	600	● 10 × 7.7	0.36	330
150	151	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	8 × 10	0.16	600	8 × 10	0.16	600	10 × 10	0.16	700
											● 10 × 7.7	0.18	600	● 10 × 7.7	0.18	600			
220	221	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	6.3 × 7.7	0.32	290	8 × 10	0.16	600	8 × 10	0.16	600	10 × 10	0.16	700
					● 8 × 6.2	0.26	300	● 8 × 6.2	0.26	300	● 10 × 7.7	0.18	600	● 10 × 7.7	0.18	600			
330	331	6.3 × 7.7	0.32	290	8 × 10	0.16	600	8 × 10	0.16	600	8 × 10	0.16	600	10 × 10	0.08	850	● 10 × 13.5	0.14	800
					● 8 × 6.2	0.26	300	● 10 × 7.7	0.18	600	● 10 × 7.7	0.18	600				12.5 × 13.5	0.12	900
390	391																12.5 × 13.5	0.12	900
470	471	8 × 10	0.16	600	8 × 10	0.16	600	8 × 10	0.16	600	8 × 10	0.08	850	● 10 × 13.5	0.08	950	16 × 16.5	0.073	1610
					● 10 × 7.7	0.18	600	● 10 × 7.7	0.18	600	● 10 × 7.7	0.18	600				12.5 × 13.5	0.08	1100
680	681	8 × 10	0.16	600	10 × 10	0.08	850	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100	16 × 16.5	0.073	1610
1000	102	8 × 10	0.16	600	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100	16 × 16.5	0.035	1800			
1500	152	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100									
2200	222	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100				16 × 16.5	0.035	1800						
3300	332	12.5 × 13.5	0.08	1100													Case size ΦD × L (mm)	Impedance	Rated ripple

Cap. (μF)	V	63			80			100		
		Code	1J		1K		2A	1J		1K
3.3	3R3				5 × 5.8	5.00	25			
4.7	4R7	5 × 5.8	3.00	50	6.3 × 5.8	3.00	40			
10	100	6.3 × 5.8	1.50	80	6.3 × 7.7	2.40	60			
					● 8 × 6.2	2.40	60			
22	220	6.3 × 7.7	1.20	120	8 × 10	1.30	130	8 × 10	1.30	130
					● 8 × 6.2	1.20	120			
33	330	8 × 10	0.65	250	8 × 10	1.30	130	10 × 10	0.70	200
47	470	8 × 10	0.65	250	10 × 10	0.70	200	12.5 × 13.5	0.32	500
68	680	10 × 10	0.35	400	12.5 × 13.5	0.32	500	12.5 × 13.5	0.32	500
100	101	10 × 10	0.35	400	12.5 × 13.5	0.32	500	16 × 16.5	0.17	793
150	151	12.5 × 13.5	0.16	800	12.5 × 13.5	0.32	500	16 × 16.5	0.17	793
220	221	12.5 × 13.5	0.16	800				18 × 16.5	0.15	917
330	331				16 × 16.5	0.17	793	18 × 16.5	0.15	917
470	471	16 × 16.5	0.082	1410	18 × 16.5	0.15	917	Case size ΦD × L (mm)	Impedance	Rated ripple
680	681	18 × 16.5	0.08	1690						

Max. Impedance (Ω) at 20°C 100kHz, Rated ripple current (mAmps) at 105°C 100kHz

●: In this case, [6] will be put at 12th digit of type numbering system.

• Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - SMD category:

Click to view products by Nichicon manufacturer:

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H4R7MNL1GS](#) [ULV2H1R8MNL1GS](#) [22927](#) [NRWA331M63V12.5X20TBF](#) [HUB1800-S](#) [UCX1V471MNQ1MS](#)
[RJ4-400V100MI5#-T4](#) [UCX1V681MNQ1MS](#) [RYK-50V101MG5TT-FL](#) [UCX1V681MNS1MS](#) [UCX1V221MCS1GS](#) [UCX1V101MCS1GS](#)
[107AXZ016MQ5](#) [EXV107M025A9HAA](#) [UCD1V100MCQ1GS](#) [UCX1H471MNQ1MS](#) [107SML016M](#) [EDK226M035A9DAA](#)
[EDT476M050S9MAA](#) [EEV-HA0J152P](#) [EEV-HA1A471UP](#) [EEV-HA1C220WR](#) [EEV-HA1C471P](#) [EEV-HA1E331UP](#) [EEV-HA1H3R3R](#)
[EEV-HA1H470UP](#) [EEV-HA1HR47R](#) [EEV-HA1V470UP](#) [EEV-HB0G221P](#) [EEV-HB0J330R](#) [EEV-HB1E220P](#) [UCX1H821MNQ1MS](#)
[UCX1H561MNS1MS](#) [UCX1H471MNS1MS](#) [UCX1H102MNQ1MS](#) [UCX1E332MNS1MS](#) [HZA277M035G24T-F](#) [TYEH1V337H10MTR](#)
[EDT107M035S9MAA](#) [BMVK100ADA330MF60G](#) [BMVK160ADA4R7MD60G](#) [NACK222M10V12.5X14TR13F](#) [NRLF332M25V22X20F](#)
[NRSZ102M16V10X22TBF](#) [EEV-HA1H330UP](#) [MAL215097513E3](#) [UCZ1V681MNQ1MS](#) [EEE-FT1C122UP](#) [EEE-FT1C821UP](#)