
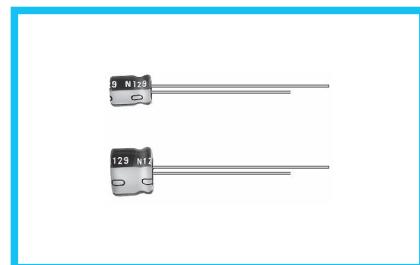


**UMT**


5mmL, Wide Temperature Range

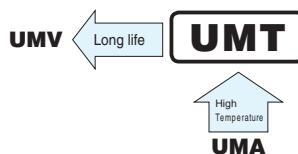


- Wide temperature range of  $-55$  to  $+105^{\circ}\text{C}$ , with 5mm height.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

**■ Specifications**


Item	Performance Characteristics																															
Category Temperature Range	-55 to $+105^{\circ}\text{C}$																															
Voltage Range	4 to 50V																															
Rated Capacitance Range	1 to 100 $\mu\text{F}$																															
Rated Capacitance Tolerance	$\pm 20\%$ at 120Hz, $20^{\circ}\text{C}$																															
Leakage Current	After 2 minutes' application of rated voltage at $20^{\circ}\text{C}$ , leakage current is not more than 0.01CV or 3 ( $\mu\text{A}$ ), whichever is greater.																															
Tangent of loss angle (tan $\delta$ )	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tan <math>\delta</math> (MAX.)</td> <td>0.37</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.13 (0.14)</td> <td>0.12 (0.14)</td> </tr> </tbody> </table>								Rated voltage (V)	4	6.3	10	16	25	35	50	tan $\delta$ (MAX.)	0.37	0.28	0.24	0.20	0.16	0.13 (0.14)	0.12 (0.14)								
Rated voltage (V)	4	6.3	10	16	25	35	50																									
tan $\delta$ (MAX.)	0.37	0.28	0.24	0.20	0.16	0.13 (0.14)	0.12 (0.14)																									
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio (MAX.)</td> <td>Z-<math>25^{\circ}\text{C}</math> / Z+<math>20^{\circ}\text{C}</math></td> <td>6</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td></td> <td>Z-<math>40^{\circ}\text{C}</math> / Z+<math>20^{\circ}\text{C}</math></td> <td>12</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table>								Rated voltage (V)	4	6.3	10	16	25	35	50	Impedance ratio (MAX.)	Z- $25^{\circ}\text{C}$ / Z+ $20^{\circ}\text{C}$	6	3	3	2	2	2		Z- $40^{\circ}\text{C}$ / Z+ $20^{\circ}\text{C}$	12	8	5	4	3	3
Rated voltage (V)	4	6.3	10	16	25	35	50																									
Impedance ratio (MAX.)	Z- $25^{\circ}\text{C}$ / Z+ $20^{\circ}\text{C}$	6	3	3	2	2	2																									
	Z- $40^{\circ}\text{C}$ / Z+ $20^{\circ}\text{C}$	12	8	5	4	3	3																									
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to <math>20^{\circ}\text{C}</math> after the rated voltage is applied for 1000 hours at <math>105^{\circ}\text{C}</math>.</p> <table border="1"> <thead> <tr> <th>Capacitance change</th> <th>Within <math>\pm 25\%</math> of the initial capacitance value (<math>\phi 3\text{mm}</math> unit, and <math>\leq 16\text{V}</math>) Within <math>\pm 20\%</math> of the initial capacitance value (<math>\geq 25\text{V}</math>)</th> </tr> </thead> <tbody> <tr> <td>tan <math>\delta</math></td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>								Capacitance change	Within $\pm 25\%$ of the initial capacitance value ( $\phi 3\text{mm}$ unit, and $\leq 16\text{V}$ ) Within $\pm 20\%$ of the initial capacitance value ( $\geq 25\text{V}$ )	tan $\delta$	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																		
Capacitance change	Within $\pm 25\%$ of the initial capacitance value ( $\phi 3\text{mm}$ unit, and $\leq 16\text{V}$ ) Within $\pm 20\%$ of the initial capacitance value ( $\geq 25\text{V}$ )																															
tan $\delta$	200% or less than the initial specified value																															
Leakage current	Less than or equal to the initial specified value																															
Shelf Life	After storing the capacitors under no load at $105^{\circ}\text{C}$ for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at $20^{\circ}\text{C}$ , they shall meet the specified values for the endurance characteristics listed above.																															
Marking	Printed with white color letter on black sleeve.																															

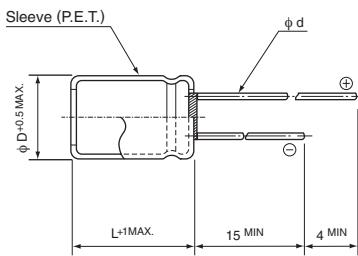**■ Radial Lead Type**

• Please refer to page 18 about the end seal configuration.



(mm)				
φ D	3	4	5	
P	1.0	1.5	2.0	2.5
φ d	0.40	0.45	0.45	0.45

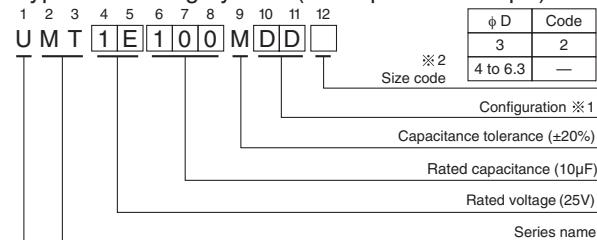**Type numbering system (Example : 25V 10 $\mu\text{F}$ )****※1 Configuration**

φ D	Pb-free leadwire Pb-free PET sleeve
3	CD
4 to 6.3	DD

※2 For  $\phi 3\text{mm}$  unit, place size code of [2] to 12th digit.

**Frequency coefficient of rated ripple current**

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

● Dimension table in next page.

## UMT

## ■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance ( $\mu$ F)	Case Size $\phi$ D×L(mm)	$\tan \delta$	Leakage Current ( $\mu$ A) (at 20°C after 2 minutes)	Rated Ripple (mArms) (105°C/120Hz)	Part Number
4 (0G)	22	4×5	0.37	3	22	UMT0G220MDD
	33	5×5	0.37	3	30	UMT0G330MDD
	47	5×5	0.37	3	36	UMT0G470MDD
	100	6.3×5	0.37	4	60	UMT0G101MDD
6.3 (0J)	22	4×5	0.28	3	22	UMT0J220MDD
	33	5×5	0.28	3	30	UMT0J330MDD
	47	5×5	0.28	3	36	UMT0J470MDD
	100	6.3×5	0.28	6.3	60	UMT0J101MDD
10 (1A)	22	5×5	0.24	3	27	UMT1A220MDD
	33	5×5	0.24	3.3	35	UMT1A330MDD
	47	6.3×5	0.24	4.7	46	UMT1A470MDD
16 (1C)	10	4×5	0.20	3	18	UMT1C100MDD
	10	3×5	0.20	3	14	UMT1C100MCD2
	22	5×5	0.20	3.52	30	UMT1C220MDD
	33	6.3×5	0.20	5.28	40	UMT1C330MDD
	47	6.3×5	0.20	7.52	50	UMT1C470MDD
25 (1E)	4.7	4×5	0.16	3	13	UMT1E4R7MDD
	4.7	3×5	0.16	3	10	UMT1E4R7MCD2
	10	5×5	0.16	3	23	UMT1E100MDD
	22	6.3×5	0.16	5.5	38	UMT1E220MDD
	33	6.3×5	0.16	8.25	48	UMT1E330MDD
35 (1V)	2.2	3×5	0.14	3	7.5	UMT1V2R2MCD2
	3.3	4×5	0.13	3	11	UMT1V3R3MDD
	3.3	3×5	0.14	3	9	UMT1V3R3MCD2
	4.7	4×5	0.13	3	15	UMT1V4R7MDD
	10	5×5	0.13	3.5	25	UMT1V100MDD
	22	6.3×5	0.13	7.7	48	UMT1V220MDD
50 (1H)	1	4×5	0.12	3	6.2	UMT1H010MDD
	1	3×5	0.14	3	5.9	UMT1H010MCD2
	2.2	4×5	0.12	3	11	UMT1H2R2MDD
	2.2	3×5	0.14	3	9	UMT1H2R2MCD2
	3.3	4×5	0.12	3	14	UMT1H3R3MDD
	4.7	5×5	0.12	3	19	UMT1H4R7MDD
	10	6.3×5	0.12	5	30	UMT1H100MDD

For cut leads, formed leads or taped parts, please add the appropriate code after the size code (12th digit).  
 If there is no size code in the part number, please add size code "1" and then add the appropriate code.

Please refer to page 18, 19 about the formed or taped product spec.  
 Please refer to page 4 for the minimum order quantity.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:***

***Click to view products by Nichicon manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#)  
[B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#)  
[EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#)  
[ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [36DA273F050BB2A](#)  
[KME25VB100M-6.3X11](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#)  
[MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#)  
[EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [RGA221M1HBK-1016G](#) [NXH 35V1800 16x20](#)  
[EWH2DM471M40OT](#) [LKFB41E470MF](#) [LKMJ3551H332MF](#) [LKMJ2002E151MF](#) [LKMJ2502G820MF](#) [LKML3502A331MF](#)  
[LKMB0901J180MF](#) [LKMB0901J2R2MF](#)