


ALUMINUM ELECTROLYTIC CAPACITORS

PA Miniature Sized, Low Impedance,
High Reliability For Switching Power Supplies
series




- Lower impedance than PW series.
- Smaller case size and high ripple current.
- Compliant to the RoHS directive (2011/65/EU).



Specifications

| Item | Performance Characteristics | | | | | | |
|---|---|--|------|------|------|------|------------|
| Category Temperature Range | -55 to +105°C | | | | | | |
| Rated Voltage Range | 6.3 to 35V | | | | | | |
| Rated Capacitance Range | 180 to 10000µF | | | | | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | | | | | |
| Leakage Current | After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (µA), whichever is greater. | | | | | | |
| Tangent of loss angle (tan δ) | Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 120Hz 20°C |
| | tan δ (MAX.) | 0.22 | 0.19 | 0.16 | 0.14 | 0.12 | |
| For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. | | | | | | | |
| Stability at Low Temperature | Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 120Hz |
| | Impedance ratio ZT / Z20 (MAX.) | Z-55°C / Z+20°C | 3 | 3 | 3 | 3 | |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 5000 hours (3000 hours for φD=8, 4000 hours for φD=10) at 105°C, the peak voltage shall not exceed the rated voltage. | | | | | | |
| | Capacitance change | Within ±20% of the initial capacitance value (6.3V, 10V : ±30%) | | | | | |
| | tan δ | 200% or less than the initial specified value (6.3V, 10V : 300%) | | | | | |
| Shelf Life | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. | | | | | | |
| | Leakage current | Less than or equal to the initial specified value | | | | | |
| Marking | Printed with white color letter on dark brown sleeve. | | | | | | |

Radial Lead Type

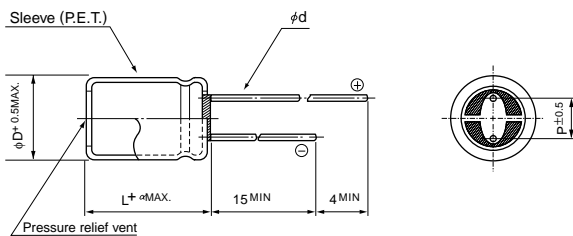


| | | |
|---|----------|-----|
| α | (L < 20) | 1.5 |
| | (L ≥ 20) | 2.0 |

| | (mm) | | | | |
|----|------|-----|------|-----|-----|
| φD | 8 | 10 | 12.5 | 16 | 18 |
| P | 3.5 | 5.0 | 5.0 | 7.5 | 7.5 |
| φd | 0.6 | 0.6 | *0.6 | 0.8 | 0.8 |

※: In case L > 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

Type numbering system (Example : 10V 470µF)

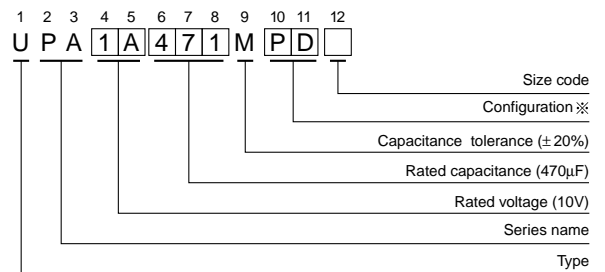

※ Configuration

| φD | Pb-free leadwire Pb-free PET sleeve |
|------------|--|
| 8-10 | PD |
| 12.5 to 18 | HD |

Frequency coefficient of rated ripple current

| Cap. (µF) | Frequency | | | | |
|---------------|-----------|-------|-------|------|---------------|
| | 50Hz | 120Hz | 300Hz | 1kHz | 10kHz or more |
| 180 to 330 | 0.55 | 0.65 | 0.75 | 0.85 | 1.00 |
| 390 to 1000 | 0.70 | 0.75 | 0.80 | 0.90 | 1.00 |
| 1200 to 10000 | 0.80 | 0.85 | 0.90 | 0.95 | 1.00 |

• Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

Standard Ratings

| V (Code) Item Cap. (μF) Code | | 6.3 (0J) | | | | 10 (1A) | | | | 16 (1C) | | | |
|---------------------------------------|-----|--------------------------------|-------------------------|-------------------------|--|----------------------------------|-------------------------|-------------------------|--|-----------------------------|--------------------|-------------------|--|
| | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) 105°C / 100kHz | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) 105°C / 100kHz | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) 105°C / 100kHz |
| | | | 20°C / 100kHz | -10°C / 100kHz | | | 20°C / 100kHz | -10°C / 100kHz | | | 20°C / 100kHz | -10°C / 100kHz | |
| 330 | 331 | | | | | | | | | 8 × 11.5 | 0.090 | 0.180 | 630 |
| 390 | 391 | | | | | | | | | 8 × 11.5 | 0.090 | 0.180 | 630 |
| 470 | 471 | | | | 8 × 11.5 | 0.090 | 0.180 | 630 | | 10 × 12.5 | 0.063 | 0.126 | 900 |
| 560 | 561 | 8 × 11.5 | 0.090 | 0.180 | 630 | 8 × 11.5 | 0.090 | 0.180 | 630 | | | | |
| 680 | 681 | 8 × 11.5 | 0.090 | 0.180 | 630 | | | | | 8 × 15 ▲10 × 12.5 | 0.062 0.063 | 0.124 0.126 | 860 900 |
| 820 | 821 | | | | | 8 × 15 ▲10 × 12.5 | 0.062 0.063 | 0.124 0.126 | 860 900 | 8 × 20 ▲10 × 16 | 0.044 0.049 | 0.088 0.098 | 1220 1240 |
| 1000 | 102 | 8 × 15 ▲10 × 12.5 | 0.062 0.063 | 0.124 0.126 | 860 900 | 8 × 20 ▲10 × 12.5 ●10 × 16 | 0.044 0.063 0.049 | 0.088 0.126 0.098 | 1220 900 1240 | 10 × 16 ●10 × 20 | 0.049 0.035 | 0.098 0.070 | 1240 1490 |
| 1200 | 122 | 10 × 12.5 ●10 × 16 | 0.063 0.049 | 0.126 0.098 | 900 1240 | 8 × 20 ▲10 × 16 | 0.044 0.049 | 0.088 0.098 | 1220 1240 | 10 × 20 | 0.035 | 0.070 | 1490 |
| 1500 | 152 | 8 × 20 ▲10 × 16 ●10 × 20 | 0.044 0.049 0.035 | 0.088 0.098 0.070 | 1220 1240 1490 | 10 × 20 | 0.035 | 0.070 | 1490 | 10 × 25 | 0.033 | 0.066 | 1680 |
| 1800 | 182 | | | | | 10 × 20 ▲10 × 25 | 0.035 0.033 | 0.070 0.066 | 1490 1680 | | | | |
| 2200 | 222 | 10 × 20 ●10 × 25 | 0.035 0.033 | 0.070 0.066 | 1490 1680 | 10 × 25 ●12.5 × 20 | 0.033 0.029 | 0.066 0.058 | 1680 1890 | 12.5 × 20 ●12.5 × 25 | 0.029 0.022 | 0.058 0.044 | 1890 2280 |
| 2700 | 272 | 10 × 25 | 0.033 | 0.066 | 1680 | 12.5 × 20 | 0.029 | 0.058 | 1890 | 12.5 × 25 | 0.022 | 0.044 | 2280 |
| 3300 | 332 | 12.5 × 20 | 0.029 | 0.058 | 1890 | 12.5 × 25 | 0.022 | 0.044 | 2280 | 12.5 × 31.5 ▲16 × 20 | 0.018 0.026 | 0.036 0.052 | 2720 2330 |
| 3900 | 392 | 12.5 × 25 | 0.022 | 0.044 | 2280 | 12.5 × 25 | 0.022 | 0.044 | 2280 | 12.5 × 35.5 | 0.016 | 0.032 | 2940 |
| 4700 | 472 | 12.5 × 25 | 0.022 | 0.044 | 2280 | 12.5 × 31.5 ▲16 × 20 | 0.018 0.026 | 0.036 0.052 | 2720 2330 | 16 × 25 ▲18 × 20 | 0.019 0.025 | 0.038 0.050 | 2760 2640 |
| 5600 | 562 | 12.5 × 31.5 ▲16 × 20 | 0.018 0.026 | 0.036 0.052 | 2720 2330 | 12.5 × 35.5 | 0.016 | 0.032 | 2940 | 16 × 31.5 ▲18 × 25 | 0.017 0.018 | 0.035 0.036 | 2810 2850 |
| 6800 | 682 | 12.5 × 35.5 | 0.016 | 0.032 | 2940 | 16 × 25 | 0.019 | 0.038 | 2760 | 18 × 25 | 0.018 | 0.036 | 2850 |
| 8200 | 822 | 16 × 25 ▲18 × 20 | 0.019 0.025 | 0.038 0.050 | 2760 2640 | 16 × 31.5 ▲18 × 25 | 0.017 0.018 | 0.034 0.036 | 2810 2850 | | | | |
| 10000 | 103 | 16 × 31.5 ▲18 × 25 | 0.017 0.018 | 0.034 0.036 | 2810 2850 | | | | | | | | |

| V (Code) Item Cap. (μF) Code | | 25 (1E) | | | | 35 (1V) | | | |
|---------------------------------------|-----|-----------------------------|--------------------|-------------------|--|-----------------------------|--------------------|-------------------|--|
| | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) 105°C / 100kHz | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) 105°C / 100kHz |
| | | | 20°C / 100kHz | -10°C / 100kHz | | | 20°C / 100kHz | -10°C / 100kHz | |
| 180 | 181 | | | | 8 × 11.5 | 0.090 | 0.180 | 630 | |
| 270 | 271 | 8 × 11.5 | 0.090 | 0.180 | 630 | 8 × 15 ▲10 × 12.5 | 0.062 0.063 | 0.124 0.126 | 860 900 |
| 330 | 331 | 8 × 11.5 | 0.090 | 0.180 | 630 | | | | |
| 390 | 391 | 8 × 15 | 0.062 | 0.124 | 860 | 8 × 20 ▲10 × 16 | 0.044 0.049 | 0.088 0.098 | 1220 1240 |
| 470 | 471 | 8 × 15 ▲10 × 12.5 | 0.062 0.063 | 0.124 0.126 | 860 900 | | | | |
| 560 | 561 | 8 × 20 ▲10 × 16 | 0.044 0.049 | 0.088 0.098 | 1220 1240 | 10 × 20 | 0.035 | 0.070 | 1490 |
| 680 | 681 | 10 × 16 | 0.049 | 0.098 | 1240 | 10 × 25 | 0.033 | 0.066 | 1680 |
| 820 | 821 | 10 × 20 | 0.035 | 0.070 | 1490 | 12.5 × 20 | 0.029 | 0.058 | 1890 |
| 1000 | 102 | 10 × 25 ●12.5 × 20 | 0.033 0.029 | 0.066 0.058 | 1680 1890 | 12.5 × 20 | 0.029 | 0.058 | 1890 |
| 1200 | 122 | 12.5 × 20 | 0.029 | 0.058 | 1890 | 12.5 × 25 | 0.022 | 0.044 | 2280 |
| 1500 | 152 | | | | 12.5 × 31.5 ▲16 × 20 | 0.018 0.026 | 0.036 0.052 | 2720 2330 | |
| 1800 | 182 | 12.5 × 25 | 0.022 | 0.044 | 2280 | 12.5 × 35.5 ▲16 × 20 | 0.016 0.026 | 0.032 0.052 | 2940 2330 |
| 2200 | 222 | 12.5 × 31.5 ▲16 × 20 | 0.018 0.026 | 0.036 0.052 | 2720 2330 | 16 × 25 ▲18 × 20 | 0.019 0.025 | 0.038 0.050 | 2760 2640 |
| 2700 | 272 | 12.5 × 35.5 | 0.016 | 0.032 | 2940 | 16 × 31.5 ▲18 × 25 | 0.017 0.018 | 0.035 0.036 | 2810 2850 |
| 3300 | 332 | 16 × 25 ▲18 × 20 | 0.019 0.025 | 0.038 0.050 | 2760 2640 | 18 × 31.5 | 0.016 | 0.032 | 2910 |
| 4700 | 472 | 18 × 25 | 0.018 | 0.036 | 2850 | | | | |

▲ : In this case, [6] will be put at 12th digit of type numbering system.

● : In this case, [3] will be put at 12th digit of type numbering system.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Nichicon](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#)
[NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#)
[NEVH3.3M450CC](#) [KME50VB100M-8X11.5](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#)
[UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#)
[EKXG451ELL820MM30S](#) [686CKR050M](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [NEV1000M6.3DE](#)
[NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#) [NEV4700M35HI](#)
[NEV4.7M100BA](#) [NEV47M16BA](#) [NEV47M50CB-BULK](#) [NEVH1.0M350AB](#) [NEVH2.2M160AB](#) [NEVH3.3M350BC](#) [TER330M50GM](#)
[477KXM035MGBWSA](#) [B43827A1106M8](#) [EKMA160EC3101MF07D](#)