
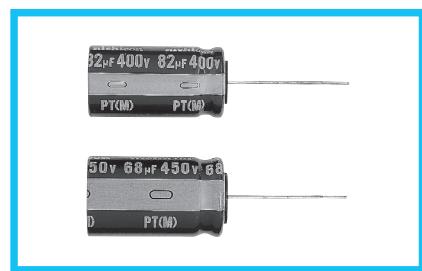


**UPT**


Miniature Sized, High Ripple Current, Long Life

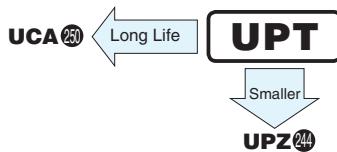


- High ripple current.
- Suited for ballast application.
- Compliant to the RoHS directive (2011/65/EU).

**■ Specifications**

Item	Performance Characteristics										
Category Temperature Range	-25 to +105°C										
Rated Voltage Range	200 to 450V										
Rated Capacitance Range	15 to 820μF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.06CV+10 (μA)										
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C Rated voltage (V) 200 220 250 400 420 450 tan δ (MAX.) 0.12 0.12 0.12 0.15 0.20 0.20										
Stability at Low Temperature	Measurement frequency : 120Hz Rated voltage (V) 200 220 250 400 420 450 Impedance ratio ZT / Z20 (MAX.) Z-25°C / Z+20°C 3 3 3 8 8 8										
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 5000 hours at 105°C, the peak voltage shall not exceed the rated voltage.				Capacitance change	Within ±20% of the initial capacitance value					
					tan δ	200% or less than the initial specified value					
					Leakage current	Less than or equal to the initial specified value					
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.										
Marking	Printed with white color letter on dark brown sleeve.										

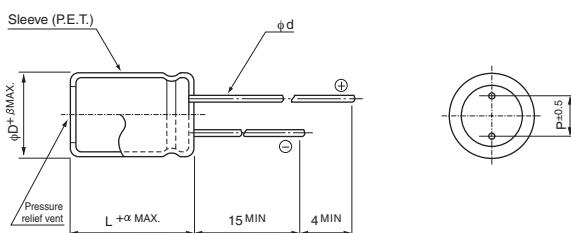**■ Radial Lead Type**

Type numbering system (Example : 250V 220μF)

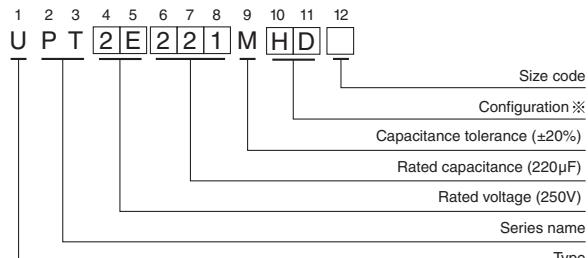

## ※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
10	PD
12.5 to 18	HD
20 to 25	RD

(mm)						
φD	10	12.5	16	18	20	22
P	5.0	5.0	7.5	7.5	10.0	10.0
φd	0.6	0.6*	0.8	0.8	1.0	1.0
β	0.5	0.5	0.5	0.5	0.5	1.0

\* In case L &gt; 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

α	(φD < 20): 1.5 (φD ≥ 20): 2.0
---	----------------------------------

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.

## UPT

## ■ Dimensions

Cap	Code	V	200		220		250		400		420		450		
			2D	2P	2E			2G		W6		2W			
15	150												10 × 31.5	0.15	
18	180									10 × 31.5	0.17	12.5 × 25		0.18	
22	220							10 × 31.5	0.21	12.5 × 25	0.20	12.5 × 31.5		0.22	
27	270							12.5 × 25	0.24	12.5 × 31.5	0.24	12.5 × 31.5		0.25	
33	330							12.5 × 31.5	0.29	12.5 × 31.5	0.27	12.5 × 35.5		0.28	
39	390							12.5 × 31.5	0.32	12.5 × 35.5	0.31	12.5 × 40		0.32	
47	470						10 × 31.5	0.27	12.5 × 35.5	0.37	12.5 × 40	0.36	16 × 31.5		0.38
56	560			10 × 31.5	0.29	12.5 × 25	0.31	12.5 × 40	0.42	16 × 31.5	0.43	16 × 35.5		0.44	
68	680	10 × 31.5	0.35	12.5 × 25	0.34	12.5 × 31.5	0.36	16 × 31.5	0.46	16 × 35.5	0.51	16 × 40		0.49	
										▲18 × 31.5	0.51	▲18 × 31.5		0.48	
82	820	12.5 × 25	0.41	12.5 × 31.5	0.39	12.5 × 31.5	0.40	16 × 31.5	0.50	16 × 40	0.57		18 × 35.5		0.55
100	101	12.5 × 31.5	0.48	12.5 × 31.5	0.43	12.5 × 35.5	0.46	16 × 35.5	0.58	18 × 35.5	0.61	18 × 40		0.65	
								▲18 × 31.5	0.58						
120	121	12.5 × 31.5	0.53	12.5 × 35.5	0.49	12.5 × 40	0.53	16 × 40	0.66	18 × 40	0.66	22 × 40		0.77	
								▲18 × 35.5	0.67						
150	151	12.5 × 35.5	0.62	12.5 × 40	0.58	16 × 31.5	0.62	18 × 40	0.77	22 × 40	0.80	22 × 50		0.92	
										▲25 × 40	0.92				
180	181	12.5 × 40	0.70	16 × 31.5	0.67	16 × 35.5	0.72	22 × 40	0.85	22 × 50	0.95		25 × 50		1.10
						▲18 × 31.5	0.72			▲25 × 40	0.95				
220	221	16 × 31.5	0.76	16 × 35.5	0.77	16 × 40	0.83								
		▲18 × 31.5	0.81	▲18 × 31.5	0.77	▲18 × 35.5	0.83								
270	271	16 × 35.5	0.88	16 × 40	0.88	18 × 40	0.95	22 × 50	1.30	25 × 50	1.20				
		▲18 × 31.5	0.87	▲18 × 35.5	0.88			▲25 × 40	1.30						
330	331	18 × 35.5	1.01	18 × 40	1.01	22 × 40	1.05	25 × 50	1.40						
390	391	18 × 40	1.13	22 × 40	1.15										
470	471	22 × 40	1.20			22 × 50	1.45								
						▲25 × 40	1.45								
560	561				22 × 50	1.50	25 × 50	1.55							
					▲25 × 40	1.50									
680	681	22 × 50	1.50	25 × 50	1.60										
		▲25 × 40	1.50												
820	821	25 × 50	1.60										Case size Φ D × L(mm)	※	

※ : Rated ripple current (Arms) at 105°C 120Hz

▲: In this case, ⑥ will be put at 12th digit of type numbering system.

## • Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.80	1.00	1.25	1.40	1.60

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:***

***Click to view products by Nichicon manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)  
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVV5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)  
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)  
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)  
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)  
[6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)  
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)  
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#)