

# ALUMINUM ELECTROLYTIC CAPACITORS

## UUT 6mmL Chip Type, Wide Temperature Range




- Chip type with load life 2000 hours at +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.




### Specifications

Item	Performance Characteristics								
Category Temperature Range	-55 to +105°C								
Rated Voltage Range	4 to 50V								
Rated Capacitance Range	1 to 100μF								
Capacitance Tolerance	±20% at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA) , whichever is greater.								
Tangent of loss angle (tan δ)	Measurement frequency :120Hz at 20°C								
	Rated voltage (V)	4	6.3	10	16	25	35	50	
	tan δ (MAX.)	0.37	0.28	0.24	0.20	0.16	0.13	0.12	
Stability at Low Temperature	Measurement frequency :120Hz								
	Rated voltage (V)		4	6.3	10	16	25	35	50
	Impedance ratio	Z-25°C / Z+20°C	6	3	3	2	2	2	2
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	5	4	3	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 105°C.		Capacitance change	Within ±25% of the initial capacitance value (16V or less)					
			tan δ	Within ±20% of the initial capacitance value (25V or more)					
			Leakage current	200% or less than the initial specified value					
				Less than or equal to the initial specified value					
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.								
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.		Capacitance change	Within ±10% of the initial capacitance value					
			tan δ	Less than or equal to the initial specified value					
			Leakage current	Less than or equal to the initial specified value					
Marking	Black print on the case top.								

### Chip Type

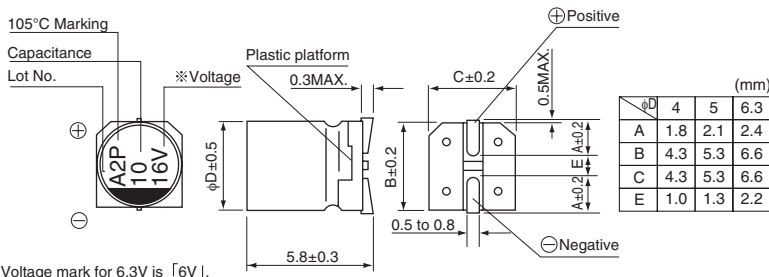

### Type numbering system (Example : 16V 10μF)

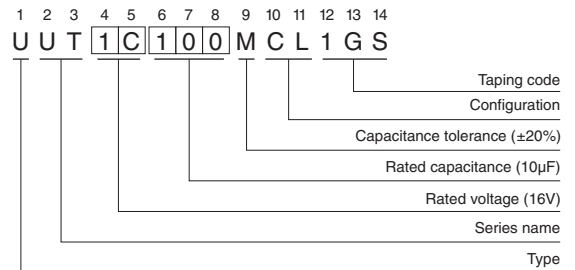

### Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

● Dimension table in next page.

UUT

## ■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 2 minutes)	Rated Ripple (mArms) (105°C/120Hz)	Part Number
4 (0G)	22	4×5.8	0.37	3	22	UUT0G220MCL1GS
	33	5×5.8	0.37	3	30	UUT0G330MCL1GS
	47	5×5.8	0.37	3	36	UUT0G470MCL1GS
	100	6.3×5.8	0.37	4	60	UUT0G101MCL1GS
6.3 (0J)	22	4×5.8	0.28	3	22	UUT0J220MCL1GS
	33	5×5.8	0.28	3	30	UUT0J330MCL1GS
	47	5×5.8	0.28	3	36	UUT0J470MCL1GS
	100	6.3×5.8	0.28	6.3	60	UUT0J101MCL1GS
10 (1A)	22	5×5.8	0.24	3	27	UUT1A220MCL1GS
	33	5×5.8	0.24	3.3	35	UUT1A330MCL1GS
	47	6.3×5.8	0.24	4.7	46	UUT1A470MCL1GS
	100	6.3×5.8	0.24	10	60	UUT1A101MCL1GS
16 (1C)	10	4×5.8	0.20	3	18	UUT1C100MCL1GS
	22	5×5.8	0.20	3.52	30	UUT1C220MCL1GS
	33	6.3×5.8	0.20	5.28	40	UUT1C330MCL1GS
	47	6.3×5.8	0.20	7.52	50	UUT1C470MCL1GS
25 (1E)	4.7	4×5.8	0.16	3	13	UUT1E4R7MCL1GS
	10	5×5.8	0.16	3	23	UUT1E100MCL1GS
	22	6.3×5.8	0.16	5.5	38	UUT1E220MCL1GS
	33	6.3×5.8	0.16	8.25	48	UUT1E330MCL1GS
35 (1V)	4.7	4×5.8	0.13	3	15	UUT1V4R7MCL1GS
	10	5×5.8	0.13	3.5	25	UUT1V100MCL1GS
	22	6.3×5.8	0.13	7.7	42	UUT1V220MCL1GS
50 (1H)	1	4×5.8	0.12	3	6.2	UUT1H010MCL1GS
	2.2	4×5.8	0.12	3	11	UUT1H2R2MCL1GS
	3.3	4×5.8	0.12	3	14	UUT1H3R3MCL1GS
	4.7	5×5.8	0.12	3	19	UUT1H4R7MCL1GS
	10	6.3×5.8	0.12	5	30	UUT1H100MCL1GS

- For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.
- Please select UUX, UUU if high C/V products are required.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):*

*Click to view products by [Nichicon manufacturer](#):*

Other Similar products are found below :

[EEV-FK1E332W](#) [22927](#) [MAL214099813E3](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#) [107AXZ016MQ5](#) [UCX1E102MNQ1MS](#)  
[EMF1EM101E83D00R](#) [EMK1AM221E83D00R](#) [EMK1EM471GB0D00R](#) [EMK1VM101E83D00R](#) [EMVY350ARA221MHA0G](#)  
[UV2G3R3M0810VG](#) [EMK1VM101FB0D00R](#) [RVT2A4R7M0605](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)  
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [HV100M100E077ETR](#)  
[RC0J226M04005VR](#) [RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1V476M6L006VR](#) [MAL214099111E3](#) [EXV107M025A9HAA](#)  
[50SEV1M4X5.5](#) [50SKV1M4X5.5](#) [TYEH1A336E55MTR](#) [UCD1V100MCQ1GS](#) [UCX1H471MNQ1MS](#) [35SEV47M6.3X8](#)  
[35SGV220M10X10.5](#) [35SLV10M5X6.1](#) [VEJ220M1VTR-0606](#) [VES2R2M1HTR-0405](#) [50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#) [107SML016M](#)  
[EDK226M035A9DAA](#) [EEV-HA1A471UP](#) [SC1C476M05005VR](#) [UCX1H471MNS1MS](#) [VZH331M1ETR-0810](#) [VES101M1CTR-0605](#)