

ALUMINUM ELECTROLYTIC CAPACITORS



nichicon



Wide Temperature Range




- One rank smaller case sizes than VZ series.
- Compliant to the RoHS directive (2011/65/EU).

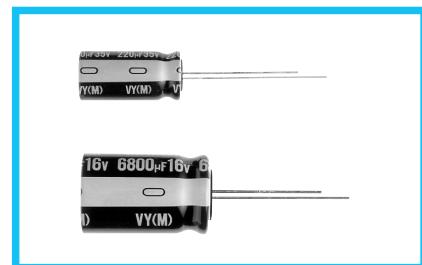


■ Specifications

Item	Performance Characteristics															
Category Temperature Range	-55 to +105°C (6.3 to 100V), -40 to +105°C (160 to 400V), -25 to +105°C (450V)															
Rated Voltage Range	6.3 to 450V															
Rated Capacitance Range	0.1 to 68000μF															
Capacitance Tolerance	±20% at 120Hz, 20°C															
Leakage Current	Rated voltage (V)		6.3 to 100			160 to 450										
			After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.			After 1 minute's application of rated voltage at 20°C, CV ≤ 1000 : I = 0.1CV+40 (μA) or less										
Tangent of loss angle (tan δ)	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.		After 1 minute's application of rated voltage at 20°C, CV > 1000 : I = 0.04CV+100 (μA) or less													
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.		Measurement frequency : 120Hz at 20°C													
Stability at Low Temperature	Rated voltage (V)		6.3	10	16	25	35	50	63	100	160 to 250	350 to 450				
	tan δ (MAX.)		0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25				
Endurance	Measurement frequency : 120Hz															
	Rated voltage (V)		6.3	10	16	25	35 to 50	63 to 100	160 to 200	250 to 350	400	450				
Shelf Life	Impedance ratio		Z-25°C / Z+20°C	5	4	3	2	2	3	4	6	15				
	ZT / Z20 (MAX.)		Z-40°C / Z+20°C	10	8	6	4	3	3	4	8	10				
Marking	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.						Capacitance change		Within ±20% of the initial capacitance value							
							tan δ		200% or less than the initial specified value							
						Leakage current										
						Less than or equal to the initial specified value										

■ Radial Lead Type

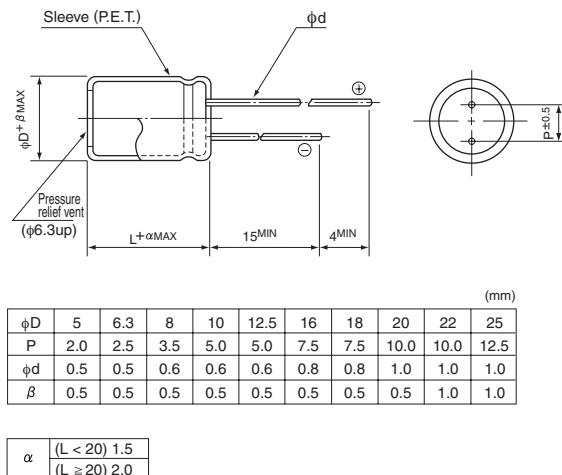

Type numbering system (Example : 10V 330μF)

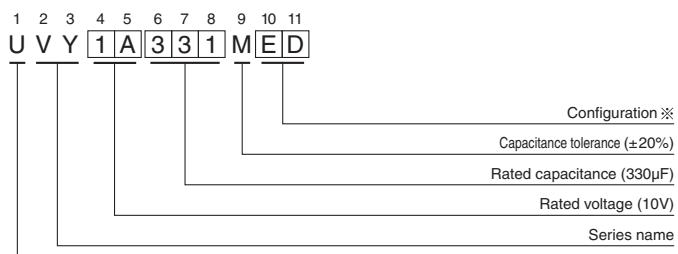

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
5	DD
6.3	ED
8 · 10	PD
12.5 to 18	HD
20 to 25	RD

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

CAT.8100D

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

VY series

Dimensions

Cap.(μ F) \ V	6.3	10	16	25	35	50	63
Code	0J	1A	1C	1E	1V	1H	1J
0.1	0R1					5 × 11	1.3
0.22	R22					5 × 11	2.9
0.33	R33					5 × 11	4.3
0.47	R47					5 × 11	7
1	010					5 × 11	13
2.2	2R2					5 × 11	20
3.3	3R3					5 × 11	25
4.7	4R7					5 × 11	30
10	100					5 × 11	46
22	220					5 × 11	68
33	330					5 × 11	90
47	470				5 × 11	93	6.3 × 11
68	680				6.3 × 11	110	6.3 × 11
100	101			5 × 11	125	6.3 × 11	150
220	221	5 × 11	155	6.3 × 11	190	6.3 × 11	250
330	331	6.3 × 11	210	6.3 × 11	225	8 × 11.5	275
470	471	6.3 × 11	250	8 × 11.5	315	10 × 12.5	380
1000	102	8 × 11.5	390	10 × 12.5	460	10 × 16	610
2200	222	10 × 16	635	10 × 16	705	10 × 20	710
3300	332	10 × 20	840	12.5 × 20	1000	12.5 × 25	1170
4700	472	12.5 × 20	1090	12.5 × 25	1260	16 × 25	1500
6800	682	12.5 × 25	1350	16 × 25	1570	16 × 25	1600
10000	103	16 × 25	1650	16 × 31.5	1820	16 × 35.5	1930
15000	153	16 × 31.5	1820	16 × 35.5	2050	18 × 40	2210
22000	223	18 × 35.5	2280	18 × 40	2420	22 × 40	2710
33000	333	20 × 40	2500	22 × 50	3210	25 × 50	3450
47000	473	22 × 50	2780	25 × 50	3570		
68000	683	25 × 50	3070				

Case size
φ D × L (mm)
Rated
ripple

Cap.(μ F) \ V	100	160	200	250	350	400	450
Code	2A	2C	2D	2E	2V	2G	2W
0.1	0R1	5 × 11	1.5		6.3 × 11	1.5	
0.22	R22	5 × 11	3.4		6.3 × 11	3.3	
0.33	R33	5 × 11	5.0		6.3 × 11	5	
0.47	R47	5 × 11	7.1		6.3 × 11	11	
1	010	5 × 11	15		6.3 × 11	16	
2.2	2R2	5 × 11	21		6.3 × 11	25	
3.3	3R3	5 × 11	29		6.3 × 11	30	
4.7	4R7	5 × 11	32		6.3 × 11	35	
10	100	5 × 11	50	8 × 11.5	41	8 × 11.5	57
22	220	6.3 × 11	93	10 × 12.5	92	10 × 16	105
33	330	8 × 11.5	130	10 × 16	125	10 × 20	140
47	470	8 × 11.5	140	10 × 20	150	12.5 × 20	195
68	680	10 × 12.5	190	12.5 × 20	250	12.5 × 25	250
100	101	10 × 16	240	12.5 × 25	310	16 × 25	320
220	221	12.5 × 20	390	16 × 31.5	410	16 × 35.5	500
330	331	12.5 × 25	540	18 × 35.5	570	18 × 40	675
470	471	16 × 25	715	18 × 40	855	22 × 40	925
1000	102	18 × 35.5	960	25 × 50	1350		
2200	222	22 × 50	1750				
3300	332	25 × 50	2070				

Rated ripple current (mAmps) at 105°C 120Hz

Frequency coefficient of rated ripple current

V	Cap.(μ F)	Frequency	50Hz	120Hz	300Hz	1 kHz	10 kHz or more
6.3 to 100	0.1 to 68		0.75	1.00	1.35	1.57	2.00
	100 to 470		0.80	1.00	1.23	1.34	1.50
	1000 to 68000		0.85	1.00	1.10	1.13	1.15
160 to 450	0.1 to 220		0.80	1.00	1.25	1.40	1.60
	330 to 1000		0.90	1.00	1.10	1.13	1.15

CAT.8100D

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Nichicon manufacturer:

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKGMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKGMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)