

# ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

## UWF

Chip Type, Low Impedance



- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.




### ■ Specifications


Item	Performance Characteristics																						
Category Temperature Range	-55 to +105°C																						
Rated Voltage Range	6.3 to 35V																						
Rated Capacitance Range	1 to 220μF																						
Capacitance Tolerance	±20% at 120Hz, 20°C																						
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.																						
Tangent of loss angle (tan δ)	<table border="1" style="width: 100%; text-align: center;"> <tr> <td>Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </table>					Rated voltage (V)	6.3	10	16	25	35	tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12						
Rated voltage (V)	6.3	10	16	25	35																		
tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12																		
Stability at Low Temperature	<table border="1" style="width: 100%; text-align: center;"> <tr> <td>Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>Impedance ratio Z-25°C / Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (MAX.) Z-55°C / Z+20°C</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>					Rated voltage (V)	6.3	10	16	25	35	Impedance ratio Z-25°C / Z+20°C	2	2	2	2	2	ZT / Z20 (MAX.) Z-55°C / Z+20°C	4	4	3	3	3
Rated voltage (V)	6.3	10	16	25	35																		
Impedance ratio Z-25°C / Z+20°C	2	2	2	2	2																		
ZT / Z20 (MAX.) Z-55°C / Z+20°C	4	4	3	3	3																		
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.</p> <table border="1" style="width: 100%; text-align: center;"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>					Capacitance change	Within ±20% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value												
Capacitance change	Within ±20% of the initial capacitance value																						
tan δ	200% or less than the initial specified value																						
Leakage current	Less than or equal to the initial specified value																						
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																						
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.																						
Marking	Black print on the case top.																						

### ■ Chip Type

(φ4 to φ6.3)

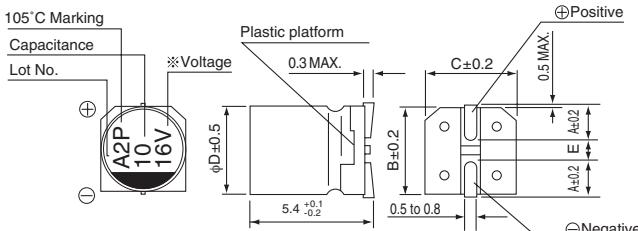


(φ8)

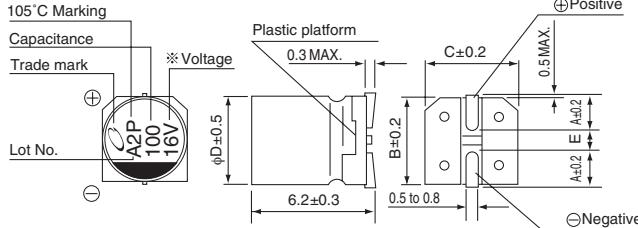

	(mm)			
#D	4	5	6.3	8
A	1.8	2.1	2.4	3.3
B	4.3	5.3	6.6	8.3
C	4.3	5.3	6.6	8.3
E	1.0	1.3	2.2	2.3

### Type numbering system (Example : 16V 10μF)

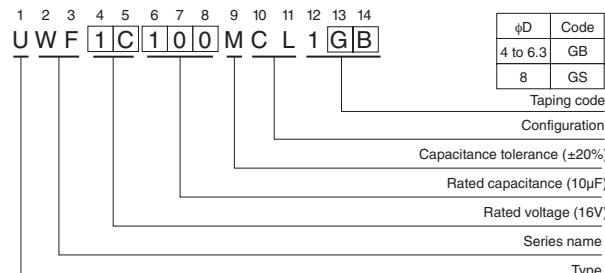

※ Voltage mark for 6.3V is 6V.

### ● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

● Dimension table in next page.

CAT.8100J

## UWF

## ■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance ( $\mu$ F)	Case Size $\phi$ D×L (mm)	$\tan \delta$	Leakage Current ( $\mu$ A) (at 20°C after 2 minutes)	Impedance ( $\Omega$ ) MAX. (20°C/100kHz)	Rated Ripple (mArms) (105°C/100kHz)	Part Number
6.3 (0J)	22	4×5.4	0.22	3	5.0	50	UWF0J220MCL1GB
	33	5×5.4	0.22	3	2.6	80	UWF0J330MCL1GB
	47	5×5.4	0.22	3	2.6	80	UWF0J470MCL1GB
	68	6.3×5.4	0.22	4.284	1.3	115	UWF0J680MCL1GB
	100	6.3×5.4	0.22	6.3	1.3	115	UWF0J101MCL1GB
	150	8×6.2	0.22	9.45	0.8	150	UWF0J151MCL1GS
	220	8×6.2	0.22	13.86	0.8	150	UWF0J221MCL1GS
10 (1A)	22	5×5.4	0.19	3	2.6	80	UWF1A220MCL1GB
	33	5×5.4	0.19	3.3	2.6	80	UWF1A330MCL1GB
	47	6.3×5.4	0.19	4.7	1.3	115	UWF1A470MCL1GB
	68	6.3×5.4	0.19	6.8	1.3	115	UWF1A680MCL1GB
	100	8×6.2	0.19	10	0.8	150	UWF1A101MCL1GS
	150	8×6.2	0.19	15	0.8	150	UWF1A151MCL1GS
16 (1C)	10	4×5.4	0.16	3	5.0	50	UWF1C100MCL1GB
	15	5×5.4	0.16	3	2.6	80	UWF1C150MCL1GB
	22	5×5.4	0.16	3.52	2.6	80	UWF1C220MCL1GB
	33	6.3×5.4	0.16	5.28	1.3	115	UWF1C330MCL1GB
	47	6.3×5.4	0.16	7.52	1.3	115	UWF1C470MCL1GB
	68	8×6.2	0.16	10.88	0.8	150	UWF1C680MCL1GS
	100	8×6.2	0.16	16	0.8	150	UWF1C101MCL1GS
25 (1E)	4.7	4×5.4	0.14	3	5.0	50	UWF1E4R7MCL1GB
	6.8	4×5.4	0.14	3	5.0	50	UWF1E6R8MCL1GB
	10	5×5.4	0.14	3	2.6	80	UWF1E100MCL1GB
	15	6.3×5.4	0.14	3.75	1.3	115	UWF1E150MCL1GB
	22	6.3×5.4	0.14	5.5	1.3	115	UWF1E220MCL1GB
	33	6.3×5.4	0.14	8.25	1.3	115	UWF1E330MCL1GB
	47	8×6.2	0.14	11.75	0.8	150	UWF1E470MCL1GS
	68	8×6.2	0.14	17	0.8	150	UWF1E680MCL1GS
35 (1V)	1	4×5.4	0.12	3	5.0	50	UWF1V010MCL1GB
	1.5	4×5.4	0.12	3	5.0	50	UWF1V1R5MCL1GB
	2.2	4×5.4	0.12	3	5.0	50	UWF1V2R2MCL1GB
	3.3	4×5.4	0.12	3	5.0	50	UWF1V3R3MCL1GB
	4.7	4×5.4	0.12	3	5.0	50	UWF1V4R7MCL1GB
	6.8	5×5.4	0.12	3	2.6	80	UWF1V6R8MCL1GB
	10	5×5.4	0.12	3.5	2.6	80	UWF1V100MCL1GB
	15	6.3×5.4	0.12	5.25	1.3	115	UWF1V150MCL1GB
	22	6.3×5.4	0.12	7.7	1.3	115	UWF1V220MCL1GB
	33	8×6.2	0.12	11.55	0.8	150	UWF1V330MCL1GS
	47	8×6.2	0.12	16.45	0.8	150	UWF1V470MCL1GS

- Taping specifications are given in page 20.
- Recommended land size, soldering by reflow are given in page 16, 17.
- Please select UUJ(p.184) if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:***

***Click to view products by Nichicon manufacturer:***

Other Similar products are found below :

[ULV2H4R7MNL1GS](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [UCX1V471MNQ1MS](#) [10SVP120M](#)  
[DV100M050C055ETR](#) [RVJ-50V101MH10U-R](#) [AEH1012471M016R](#) [MAL213967339E3](#) [GVT1C337M0608CNVC](#) [ATB106M050D058](#)  
[ATB476M050F065](#) [ATB476M035E058](#) [ATB107M016E058](#) [ATB107M035E077](#) [EMVE350ARA101MF80G](#) [EMHL250ARA221MHA0G](#)  
[ATB477M016F102](#) [EMK1EM331FB0D00R](#) [EMF1CM221FB0D00R](#) [EMF1CM331FB0D00R](#) [EMF1CM471FB0D00R](#)  
[EMK1JM101GB0D00R](#) [EMK1AM102GB0D00R](#) [EMK1HM221GB0D00R](#) [DV221M6R3E055ETR](#) [DV221M025E077ETR](#)  
[RV331M025F105ETR](#) [RV1A101M0505](#) [GVZ1H101M0607](#) [CK1E100M0405](#) [GVM1E331M0607](#) [VT10UF100V167RV0127](#)  
[VT100UF16V167RV0124](#) [CS100UF35V167RV0155](#) [CK220UF16V167RV0142](#) [VT10UF16V167RV0128](#) [VT22UF35V167RV0131](#)  
[CS470UF10V167RV0150](#) [CK100UF16V167RV0138](#) [CK220UF10V167RV0141](#) [RV330UF25V167RV0055](#) [CS47UF16V167RV0152](#)  
[VT470UF16V167RV0135](#) [CS100UF10V167RV0144](#) [126RV0017](#) [VT47UF35V167RV0137](#) [CS220UF35V167RV0148](#)