

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon


UWH

Chip Type, High Reliability
High Temperature (260°C) Reflow



- Corresponding with 260°C peak reflow soldering
Recommended reflow condition : 260°C peak 5 sec. 230°C over 60 sec. 2 times ($\phi 8 \times 6.2, \phi 10 \times 10 : 1$ time)
- Chip type high temperature range, for +125°C use.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.

UWH




UUB





■ Specifications

Item	Performance Characteristics				
Category Temperature Range	-40 to +125°C				
Rated Voltage Range	10 to 50V				
Rated Capacitance Range	10 to 330μF				
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C				
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4(μA), whichever is greater. Measurement frequency : 120Hz at 20°C				
Tangent of loss angle (tan δ)	Rated voltage (V)	10	16	25	35
	tan δ (MAX.)	0.32	0.24	0.21	0.18
Stability at Low Temperature	Measurement frequency : 120Hz Rated voltage (V) 10 16 25 35 50 Impedance ratio ZT / Z20 (MAX.) Z-40°C / Z+20°C 12 8 6 4 4				
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 125°C. Capacitance change Within $\pm 30\%$ of the initial capacitance value tan δ 300% or less than the initial specified value Leakage current Less than or equal to the initial specified value				
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.				
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C. Capacitance change Within $\pm 10\%$ of the initial capacitance value tan δ Less than or equal to the initial specified value Leakage current Less than or equal to the initial specified value				
Marking	Black print on the case top.				

■ Chip Type

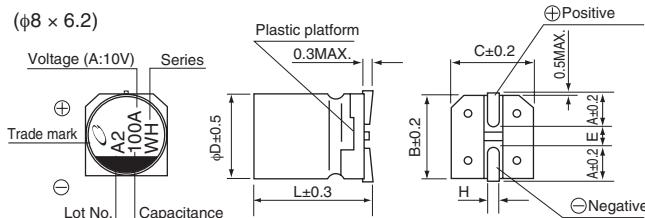

Type numbering system (Example : 10V 100μF)

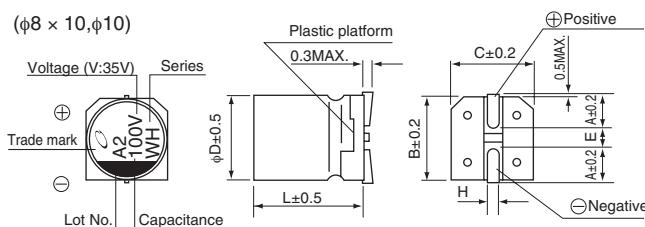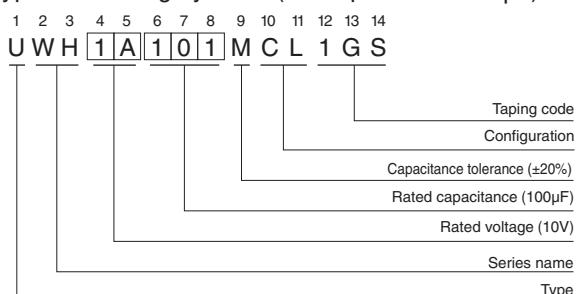

φD x L	8 x 6.2	8 x 10	10 x 10
A	3.3	2.9	3.2
B	8.3	8.3	10.3
C	8.3	8.3	10.3
E	2.3	3.1	4.5
L	6.2	10	10
H	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

Voltage

V	10	16	25	35	50
Code	A	C	E	V	H

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

● Dimension table in next page.

CAT.8100K

UWH

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D×L(mm)	$\tan \delta$	Leakage Current (μ A) (at 20°C after 1 minute)	Rated Ripple (mArms) (125°C/120Hz)	Part Number
10 (1A)	100	8×6.2	0.32	30	58	UWH1A101MCL1GS
	220	8×10	0.32	66	90	UWH1A221MCL1GS
	330	10×10	0.32	99	112	UWH1A331MCL1GS
16 (1C)	100	8×10	0.24	48	66	UWH1C101MCL1GS
	220	10×10	0.24	105.6	102	UWH1C221MCL1GS
25 (1E)	47	8×6.2	0.21	35.25	48	UWH1E470MCL1GS
	100	8×10	0.21	75	74	UWH1E101MCL1GS
	220	10×10	0.21	165	116	UWH1E221MCL1GS
35 (1V)	33	8×6.2	0.18	34.65	44	UWH1V330MCL1GS
	47	8×10	0.18	49.35	52	UWH1V470MCL1GS
	100	10×10	0.18	105	80	UWH1V101MCL1GS
50 (1H)	10	8×6.2	0.18	15	24	UWH1H100MCL1GS
	22	8×6.2	0.18	33	38	UWH1H220MCL1GS
	33	8×10	0.18	49.5	46	UWH1H330MCL1GS
	47	10×10	0.18	70.5	58	UWH1H470MCL1GS

- For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:

Click to view products by Nichicon manufacturer:

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099017E3](#) [MAL215099818E3](#) [AEH1010331M025R](#) [AEA1010102M016R](#) [AEH1012471M016R](#)
[MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CEO](#) [RVT1000UF10V34RV0081](#) [XT100UF50V90RV0067](#)
[RVE100UF16V67RV0046](#) [XT47UF50V90RV0082](#) [XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#)
[RST100UF35V009](#) [RST47UF25V035](#) [RST47UF50V038](#) [RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#)
[FZ100UF50V90RV0066](#) [RST100UF16V003](#) [XT100UF10V90RV0060](#) [XT100UF16V90RV0061](#) [RT100UF35V90RV0102](#)
[XT100UF35V90RV0065](#) [FZ100UF35V90RV0064](#) [XT100UF25V90RV0062](#) [XT220UF10V90RV0073](#) [XT220UF35V90RV0076](#)
[XT470UF6.3V90RV0128](#) [LZ47UF35V90RV0123](#) [XT330UF25V90RV0127](#) [XT47UF35V90RV0081](#)