UZT

4.5mmL Chip Type, Wide Temperature Range

- Chip type with 4.5mm height, operating over wide temperature range of -40 to +105°C.
 Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.






■Specifications

Item	Performance Characteristics											
Category Temperature Range	-40 to +105°C											
Rated Voltage Range	6.3 to 50V											
Rated Capacitance Range	1 to 100μF											
Capacitance Tolerance	±20% at 120Hz, 20°C											
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (µA), whichever is greater.											
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C											
	Rated voltage (V)	6.3	10		16 25		35	5	50			
	tan δ (MAX.)	0.38	0.32		0.20		0.16	0.1	4	0.14		
	Measurement frequency: 120Hz											
O(1)	Rated voltage (V)		6.3		10	16	25	35	50			
Stability at Low Temperature	Impedance ratio	Z-25°C / 2	Z+20°C	6		5	3	3	3	3		
	ZT / Z20 (MAX.)	Z-40°C / Z	Z+20°C	10		10	6	6	4	4		
Endurance	The specifications listed at right shall be met when the capacitors are restored to					Capacitance Within ±25% of the initial capacitance value (16V or less) within ±20% of the initial capacitance value (25V or more)						
	20°C after the rated voltage is applied for			tan δ 300% or less than initial			al specified	d value				
	1000 hours at 105°	C.		[Lea	akage cı	urrent	Less than or	equal to th	e initial spe	cified value	
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.											
Resistance to soldering	The capacitors are kept on a hot plate for 30 seconds, wi						h [Capacitanc	e change	Within ±	:10% of the initial capacit	ance value
	is maintained at 250°C. The capacitors shall mee characteristic requirements listed at right when th removed from the plate and restored to 20°C.						tan δ	90		n or equal to the initial spec		
heat									s than or equal to the initial specified value			
Marking	Black print on the c											


■Chip Type

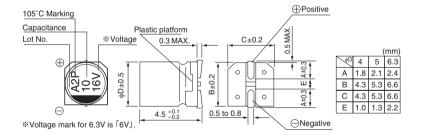

• Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Type numbering system (Example : $16V 10\mu F$)

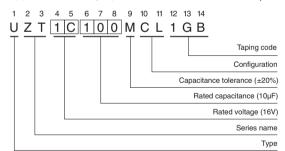



Dimensions

Rated Voltage (V) (code)	Rated Capacitance (µF)	Case Size φD×L(mm)	tan δ	Leakage Current (µA) (at 20°C after 2 minutes	Rated Ripple (mArms) (105°C/120Hz)	Part Number
	22	4×4.5	0.38	3	19	UZT0J220MCL1GB
6.3	33	5×4.5	0.38	3	26	UZT0J330MCL1GB
(0J)	47	5×4.5	0.38	3	32	UZT0J470MCL1GB
	100	6.3×4.5	0.38	6.3	52	UZT0J101MCL1GB
	22	5×4.5	0.32	3	24	UZT1A220MCL1GB
10 (1A)	33	5×4.5	0.32	3.3	30	UZT1A330MCL1GB
(117)	47	6.3×4.5	0.32	4.7	40	UZT1A470MCL1GB
	10	4×4.5	0.20	3	16	UZT1C100MCL1GB
16	22	5×4.5	0.20	3.52	26	UZT1C220MCL1GB
(1C)	33	6.3×4.5	0.20	5.28	35	UZT1C330MCL1GB
	47	6.3×4.5	0.20	7.52	44	UZT1C470MCL1GB
	4.7	4×4.5	0.16	3	11	UZT1E4R7MCL1GB
25	10	5×4.5	0.16	3	20	UZT1E100MCL1GB
(1E)	22	6.3×4.5	0.16	5.5	33	UZT1E220MCL1GB
	33	6.3×4.5	0.16	8.25	42	UZT1E330MCL1GB
	4.7	4×4.5	0.14	3	13	UZT1V4R7MCL1GB
35 (1V)	10	5×4.5	0.14	3.5	22	UZT1V100MCL1GB
	22	6.3×4.5	0.14	7.7	36	UZT1V220MCL1GB
	1	4×4.5	0.14	3	5.4	UZT1H010MCL1GB
	2.2	4×4.5	0.14	3	9.6	UZT1H2R2MCL1GB
50 (1H)	3.3	4×4.5	0.14	3	12	UZT1H3R3MCL1GB
,	4.7	5×4.5	0.14	3	16	UZT1H4R7MCL1GB
	10	6.3×4.5	0.14	5	26	UZT1H100MCL1GB

[•] For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

• Please select UUX, UUJ series if high C/V products are required.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:

Click to view products by Nichicon manufacturer:

Other Similar products are found below:

EWF-FK1E332W 22927 MAL214099813E3 HUB1800-S 34610 RYK-50V101MG5TT-FL 107AXZ016MQ5 UCX1E102MNQ1MS

EMF1EM101E83D00R EMK1AM221E83D00R EMK1EM471GB0D00R EMK1VM101E83D00R EMVY350ARA221MHA0G

UV2G3R3M0810VG EMK1VM101FB0D00R RVT2A4R7M0605 MAL214097402E3 MAL215375471E3 MAL224699909E3

MAL224699813E3 MAL215099014E3 MAL215099017E3 MAL215099117E3 MAL215099818E3 HV100M100E077ETR

RC0J226M04005VR RC0J476M05005VR RC1A227M08010VR RC1V476M6L006VR MAL214099111E3 EXV107M025A9HAA

50SEV1M4X5.5 50SKV1M4X5.5 TYEH1A336E55MTR UCD1V100MCQ1GS UCX1H471MNQ1MS 35SEV47M6.3X8

35SGV220M10X10.5 35SLV10M5X6.1 VEJ220M1VTR-0606 VES2R2M1HTR-0405 50SEV10M6.3X5.5 50SGV1M4X6.1 107SML016M

EDK226M035A9DAA EEV-HA1A471UP SC1C476M05005VR UCX1H471MNS1MS VZH331M1ETR-0810 VES101M1CTR-0605