# **QUICK LOCKS**

### QLX Series



RoHS 10



Please observe instructions to prevent over heat and possible fire.

- For use within an indoor wiring box.
- Do not use below area.
- \* High temperature, High humidity, water splash area.
- \* Strong alkali like under ammonia, organic solvent atmosphere.

Quick Locks for solid copper wires. Make indoor wiring by inserting stripped solid copper wires.

## FEATURES

- Reliable, double contacts for higher reliability.
- Simply strip and insert for instant connection.
- $\blacksquare$  Clear translucent housing enables visual inspection of correct wire installation.
- Waved copper contact for easier insertion of wire.

#### SPECIFICATION


■ Material Spring: Stainless Steel

Connector contact : Oxygen free copper (Tin plated) Housing : Polycarbonate (UL94V2)

#### STANDARDS

- JIS C 2813
- UL
- VDE

#### Instructions

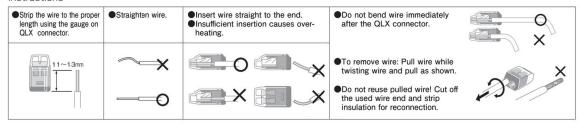

PART NUMBER	POLE	DIMENSIONS (mm)			DATINGO	STD	APPLIED	001.00
		LENGTH	WIDTH	HEIGHT	RATINGS	QTY/BOX	WIRE	COLOR
QLX 2	2	20.5	11.6	9.1	20A 300V	50	- COPPER/ SOLID WIRE - φ1.6mm - ξ - φ2.0mm	RED
QLX 3	3		16.2			50		BLUE
QLX 4	4		20.8			50		YELLOW
QLX 5	5		25.4			50		ORANGE
QLX 6	6		30.0			20		PURPLE
QLX 8	8		39.2			20		GREEN

- Use Pin terminal to connect with stranded wire.
   See page 28 & 34 for TC1.25-18S-ST(CAP VC1.25) TC2-18-ST(CAP VC2).
- 1.5mm² and 2.5mm² are available for VDE standard.



96

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Terminals category:

Click to view products by Nichifu manufacturer:

Other Similar products are found below:

HT-13-10 71M-250-32-NB 01-2065-1-0216 00581P0075 M10-10RX M10BCK 60205-1 604200-1 60598-1-CUT-TAPE 60617-1-C 60873
1 M14-516R/SK M14-6RSX M18-10FLX M18-8FBX M18-8R/LX M18BCK 61314-6-C 61-S 61-SN-A 62-NBM-A 63-S 640179-1

640917-2-CUT-TAPE 6501550002 66107-2-C 696683-1 696834-1 696861-1 696931-1 696999-1 M8-516RK M86700006

MA250DMFMX-A 701-2007 701-2307 701-7761-03 70F-110-32-PB 718-N-A 71M-187-20-NBL 71M-250-32-NBL 72F-187-20-NBL

72M-250-32-NBL 7310 73F-250-32 73F-250-32-NBL 73F-250-32-NL F14-10C F-1M 751-250