

# MSP

## Pushbutton Switches




RoHS Compliant

### Specifications

Contact specs.	Silver plated contacts	
Rating	Max.	3A 125VAC
Initial contact resistance	20mΩ max. (1A 2~4VDC)	
Dielectric strength	1,000VAC 1 minute	
Insulation resistance	100MΩ min.	(500VDC)
Electrical life	5,000 operations	


### Part Numbering

**MSP 1 03 B - Z**

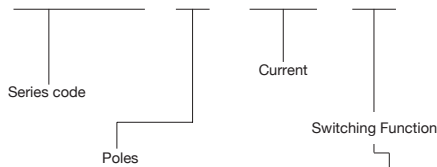


Code	Switching Function
<b>B</b>	ON — (OFF)
<b>C</b>	OFF — (ON)

### Terminal Style

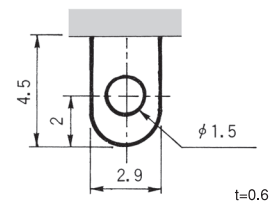

### SPST

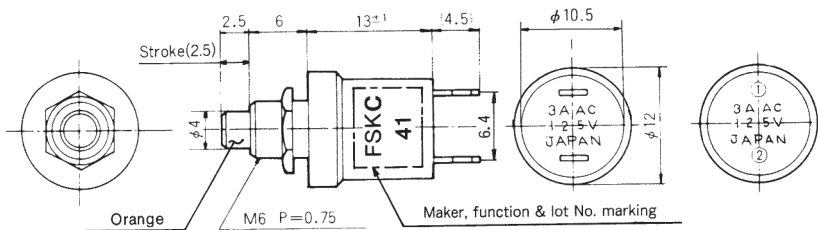

Terminal numbers are not shown on the switch.


Part No.	Switching function	
<b>MSP103B-Z</b>	ON	(OFF)
Connecting terminals	1-2	—
<b>MSP103C-Z</b>	OFF	(ON)
Connecting terminals	—	1-2

### Standard Accessories

(Supplied with switch)


#### Hex Nut

140008010237

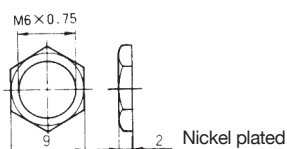

### Panel Cut-Out Dimensions

Panel thickness : 3.5 mm max.



### Soldering Specifications

- (1) Manual Soldering  
Device : Soldering iron
- (2) 380°C, 3 seconds, Max.

(ON)&(OFF) : Momentary.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [Nidec Copal](#) manufacturer:*

Other Similar products are found below :

[8940K2012](#) [LW1L-M1C10V-A](#) [LW1L-M1C70-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M22-D-R-GB0/K11](#) [M7E-HRN2](#)  
[67021K512](#) [67081K512X](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [MML21EA2ADK](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#)  
[MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#) [861K11911T01A07](#) [861K13810T00A14](#) [861K13911](#)  
[8646AB6X718UL](#) [8646ABUL](#) [9001KXRK](#) [907AYY100](#) [PMHD155A1](#) [9533CD4+U574+U4922](#) [95-414.000](#) [99-450.837](#) [99-453.837](#)  
[PV3H2B0NN-341](#) [1203MRA](#) [A22NZBGANGA](#) [A22NZBNANGA](#) [A22NZMPATRA](#) [A2PMA1X03EC56](#) [A3A-5123-02](#) [A3A-7140](#) [A3A-7310](#) [A3A-7340](#) [A3U-TMW-A2C-5M](#) [A595](#) [12037A2ULCSA](#) [ABD122N-B](#) [1211390004](#)