# **Crystal Units**



# **NX1612SA**

## For OA / AV / Short-range Wireless

#### **■** Features

A small and thin surface-mount type crystal unit.

- Ideal for Wearable device and Short-range Wireless module.
- Ultra compact and thin (Typ. 1.6 × 1.2 × 0.3 mm)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.








## **■** Specifications

ltem Model	NX1612SA
Nominal Frequency	24 to 80 MHz
Overtone Order	Fundamental
Frequency Tolerance (25 ±3 °C)	±10 × 10 <sup>-6</sup>
Frequency versus Temperature Characteristics (with reference to +25 °C)	±15 × 10 <sup>-6</sup>
Operating Temperature Range	−30 to +85 °C
Storage Temperature Range	−40 to +85 °C
Equivalent Series Resistance	Refer to *1
Level of Drive	10 μW (Max. 200 μW)
Load Capacitance	8 pF
Specifications Number	STD-CIS-1

#### **■** Dimensions

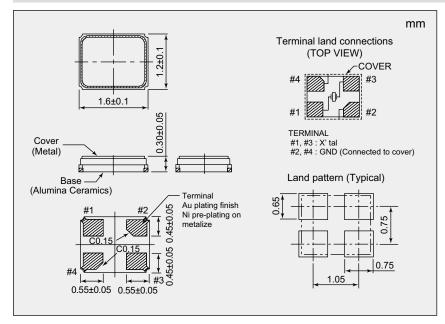

### \*1 Equivalent Series Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]
24 to 32	150
32 to 38	100
38 to 80	80

Please specify the model name, frequency, and specification number when you order products. For further questions regarding specifications, please feel free to contact us.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by Nihon Dempa Kogyo manufacturer:

Other Similar products are found below:

CX3225GB25000M0PPSZ1 718-13.2-1 MC405 32.0000K-R3:PURE SN 7A-40.000MAAE-T FL2000085 99-BU 9B-15.360MBBK-B 9C-7.680MBBK-T H10S-12.000-18-EXT-TR ABC2-6.000MHZ-D4Z-T ABLS-20.000MHZ-D2-T ABS071-32.768KHZ-6-T R38-32.768-12.5-5PPM-NPB BTD1062E05A-513 21U15A-21.4MHZ RTX-781DF1-S-20.950 LFXTAL066198Cutt 9C-14.31818MBBK-T A-11.000MHZ-27 ABL-27.000MHZ-B4Y-T ABM11-132-24.000MHZ-T3 ABM3B1-25.000MHZ-D2Y-T SPT2A-.032768B SPT2A.032768G SSPT7F-9PF20-R FX325BS-38.88EEM1201 LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7A-24.576MBBK-T 7B-30.000MBBK-T 7A-14.31818MBBK-T 6504-202-1501 6526-202-1501 ABLS-12.000MHZ-B2Y-T ABLS-10.000MHZ-D3W-T 7A-10.000MBBK-T SG636PCE-20.000MC 3404 E1SAA18-25.000M TR CM315D32768EZFT C1E-24.000-7-2020-R C1E-19.200-12-1530-X-R C1E-16.000-12-1530-X-R FL5000014 EUCA18-3.1872M FX0800015 425F35E027M0000