


NX3225SA For OA / AV Mobile Communications/ Short-range Wireless

■ Features

Ideal for such as bluetooth, Wifi, smartphone and tablet pc.

- •Compact and thin. (3.2 × 2.5 × 0.55 mm typ.)
- •Excellent environmental characteristics, including heat and shock resistance.
- •Lead-free. Meets the requirements for re-flow profiling using lead-free solder.






■ Specifications

Item Model	NX3225SA		
Nominal Frequency	12 to 64 MHz	16 to 54 MHz	40 to 150 MHz
Overtone Order	Fundamental	Fundamental	3rd overtone
Frequency Tolerance (25 ±3 °C)	±15 × 10 ⁻⁶	±10 × 10 ⁻⁶	±20 × 10 ⁻⁶
Frequency versus Temperature Characteristics (with reference to +25 °C)	±25 × 10 ⁻⁶	±10 × 10 ⁻⁶	±25 × 10 ⁻⁶
Operating Temperature Range	−40 to +85 °C	−20 to +75 °C	-40 to +85 °C
Storage Temperature Range	−40 to +85 °C		
Equivalent Series Resistance	Refer to *1	Refer to *2	Refer to *3
Level of Drive	10 μW (Max. 200 μW)		
Load Capacitance	8 pF	10 pF	Series resonance
Specifications Number	STD-CSR-6	STD-CSQ-1	STD-CSR-7

■ Dimensions

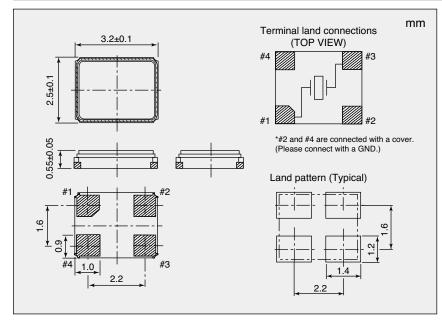

*1	Εq	uivalent	Series	Resistance
----	----	----------	--------	------------

Overtone Order	Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]
Fundamental	12 to 13	100
	13 to 20	80
	20 to 64	50

*2 Equivalent Series Resistance

Overtone Order	treduency	
Fundamental	16 to 20	80
	20 to 54	50

*3 Equivalent Series Resistance

Overtone Order	treduency	
3rd overtone	40 to 100	140
	100 to 150	100

Please specify the model name, frequency, and specification number when you order products. For further questions regarding specifications, please feel free to contact us.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by Nihon Dempa Kogyo manufacturer:

Other Similar products are found below:

CX3225GB25000M0PPSZ1 718-13.2-1 MC405 32.0000K-R3:PURE SN 7A-40.000MAAE-T FL2000085 99-BU 9B-15.360MBBK-B 9C-7.680MBBK-T H10S-12.000-18-EXT-TR ABC2-6.000MHZ-D4Z-T ABLS-20.000MHZ-D2-T ABS071-32.768KHZ-6-T R38-32.768-12.5-5PPM-NPB BTD1062E05A-513 21U15A-21.4MHZ RTX-781DF1-S-20.950 LFXTAL066198Cutt 9C-14.31818MBBK-T A-11.000MHZ-27 ABL-27.000MHZ-B4Y-T ABM11-132-24.000MHZ-T3 ABM3B1-25.000MHZ-D2Y-T SPT2A-.032768B SPT2A.032768G SSPT7F-9PF20-R FX325BS-38.88EEM1201 LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7A-24.576MBBK-T 7B-30.000MBBK-T 7A-14.31818MBBK-T 6504-202-1501 6526-202-1501 ABLS-12.000MHZ-B2Y-T ABLS-10.000MHZ-D3W-T 7A-10.000MBBK-T SG636PCE-20.000MC 3404 E1SAA18-25.000M TR CM315D32768EZFT C1E-24.000-7-2020-R C1E-19.200-12-1530-X-R C1E-16.000-12-1530-X-R FL5000014 EUCA18-3.1872M FX0800015 425F35E027M0000