


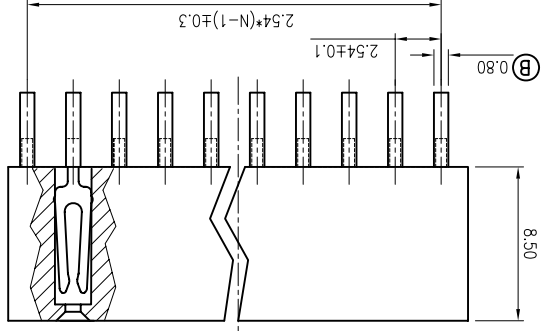
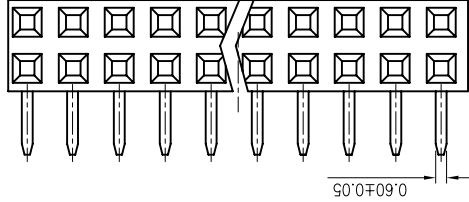
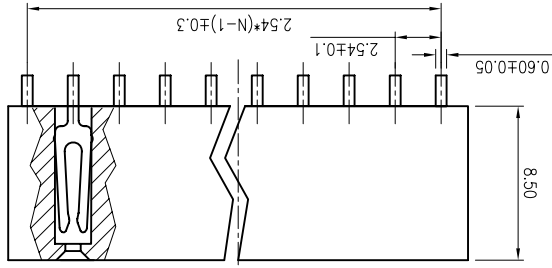


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/25/05'		LJC 09/25/05'
B	长端子非针尾宽度0.6更改为0.8	LL 11/29/06'		

NOTES:

- ELECTRICAL CHARACTERISTICS:
 1.1 CONTACT RESISTANCE: 30mΩ Max. INITIAL.
 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 1.3 INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 2.1 TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:
 DS1024- X X X

CONTACT PLATING
 F1: FULL GOLD FLASH
 0: SELECTIVE GOLD FLASH
 MOUNTING TYPE
 R: R/A TYPE
 NO.OF CONTACTS
 1*1-1*40
 2*2-2*40

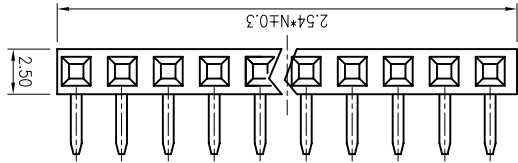

GENERAL TOLERANCE		ANGLE TOLERANCE	
X. ±0.60	X. ±0.38	X. ±0.5	X. ±0.25
X. ±0.25	.XX	.XX ±0.2	.XX
DRAWING TYPE		CUSTOMER	
SCALE		1:1	
DRAWING NO.		C-DS1024-XXXX	

PROJECTION TITLE

UNITS mm

SHEET SIZE A4

SERIES DS1024 SERIES

晨翔电子有限公司 CONNLY ELECTRONIC CO., LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Connfly](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [48050-002LF](#) [DF62W-EP2022PC](#) [2203348](#)
[DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#)
[0009482033](#) [0009507031](#) [0009524054](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-](#)
[06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1](#)
[\(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [632209-000](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#)
[65039-019ELF](#) [65692-001LF](#)