


KYA Series

- Downsized from KY series
- Newly innovative electrolyte is employed to minimize impedance
- Endurance with ripple current : 4,000 to 10,000 hours at 105°C
- Non solvent resistant type
- RoHS2 Compliant





SPECIFICATIONS

Items	Characteristics	
Category	-40 to +105°C	
Temperature Range		
Rated Voltage Range	6.3 to 100V _{dc}	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)	
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	6.3V 10V 16V 25V 35V 50V 63V 100V
	tan δ (Max.)	0.22 0.19 0.16 0.14 0.12 0.10 0.09 0.08
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V 10V 16V 25V 35V 50V 63V 100V
	Z(-25°C)/Z(+20°C)	4 3 2 2 2 2 2 2
	Z(-40°C)/Z(+20°C)	8 6 4 3 3 3 3 3 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 105°C.	
	Time	6.3 to 10V _{dc} φ5 & 6.3 : 4,000hours φ8 & 10 : 6,000hours φ12.5 to 16 : 8,000hours 16 to 100V _{dc} φ5 & 6.3 : 5,000hours φ8 & 10 : 7,000hours φ12.5 to 16 : 10,000hours
	Capacitance change	≤ ±25% of the initial value
	D.F. (tan δ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.	
	Capacitance change	≤ ±25% of the initial value
	D.F. (tan δ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value


DIMENSIONS [mm]

- Terminal Code : E

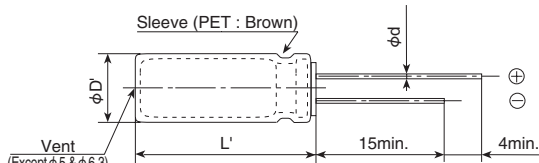

φD	5	6.3	8	10	12.5	16
φd	0.5	0.5	0.6	0.6	0.6	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5
φD'	φD+0.5max.					
L'	L+1.5max.					

PART NUMBERING SYSTEM

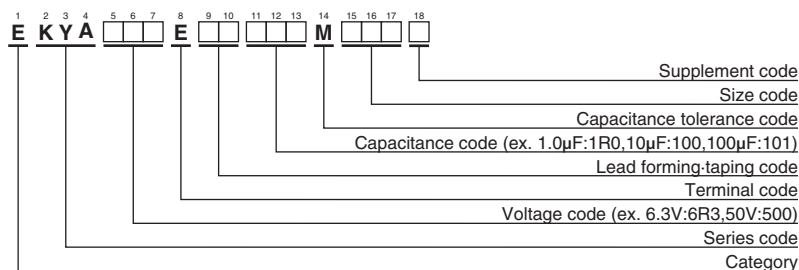

Please refer to "Product code guide (radial lead type)"

◆STANDARD RATINGS

VV (V _{dc})	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA rms/105°C, 100kHz)	Part No.	VV (V _{dc})	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA rms/105°C, 100kHz)	Part No.
			20°C	-10°C						20°C	-10°C		
6.3	100	5×11	0.90	3.6	150	EKYA6R3E□□101ME11D	25	3,300	16×25	0.021	0.060	2,930	EKYA250E□□332ML25S
	180	5×11	0.40	1.6	250	EKYA6R3E□□181ME11D		3,900	16×25	0.021	0.060	2,930	EKYA250E□□392ML25S
	220	5×11	0.40	1.6	250	EKYA6R3E□□221ME11D		4,700	16×31.5	0.017	0.050	3,450	EKYA250E□□472MLN3S
	330	6.3×11	0.22	0.87	400	EKYA6R3E□□331MF11D		5,600	16×35.5	0.015	0.044	3,610	EKYA250E□□562MLP1S
	470	6.3×11	0.22	0.87	400	EKYA6R3E□□471MF11D		33	5×11	0.40	1.6	250	EKYA350E□□330ME11D
	820	8×11.5	0.13	0.52	640	EKYA6R3E□□821MHB5D		47	5×11	0.40	1.6	250	EKYA350E□□470ME11D
	1,200	10×12.5	0.080	0.32	865	EKYA6R3E□□122MJCS5		100	6.3×11	0.22	0.87	400	EKYA350E□□101MF11D
	1,200	8×15	0.087	0.35	840	EKYA6R3E□□122MJ25S		220	8×11.5	0.13	0.52	640	EKYA350E□□1221MHB5D
	1,500	8×20	0.069	0.27	1,050	EKYA6R3E□□152MH20D		270	8×15	0.087	0.35	840	EKYA350E□□271MH15D
	1,800	10×16	0.060	0.24	1,300	EKYA6R3E□□182MJ16S		330	10×12.5	0.080	0.32	865	EKYA350E□□331MJCS5
	2,700	10×20	0.046	0.18	1,400	EKYA6R3E□□272MJ20S		390	8×20	0.069	0.27	1,050	EKYA350E□□391MH20D
	3,300	10×25	0.042	0.17	1,650	EKYA6R3E□□332MJ25S		470	10×16	0.060	0.24	1,300	EKYA350E□□471MJ16S
	3,900	12.5×20	0.035	0.12	1,900	EKYA6R3E□□392MK20S		680	10×20	0.046	0.18	1,400	EKYA350E□□681MJ20S
	4,700	12.5×25	0.027	0.089	2,230	EKYA6R3E□□472MK25S		820	10×25	0.042	0.17	1,650	EKYA350E□□821MJ25S
	5,600	12.5×25	0.027	0.089	2,230	EKYA6R3E□□562MK25S		1,000	12.5×20	0.035	0.12	1,900	EKYA350E□□102MK20S
10	100	5×11	0.90	3.6	150	EKYA100E□□101ME11D	1,500	12.5×25	0.027	0.089	2,230	EKYA350E□□152MK25S	
	120	5×11	0.40	1.6	250	EKYA100E□□121ME11D	2,200	16×25	0.021	0.060	2,930	EKYA350E□□222ML25S	
	330	6.3×11	0.22	0.87	400	EKYA100E□□331MF11D	2,700	16×25	0.021	0.060	2,930	EKYA350E□□272ML25S	
	560	8×11.5	0.13	0.52	640	EKYA100E□□561MHB5D	3,300	16×31.5	0.017	0.050	3,450	EKYA350E□□332MLN3S	
	820	8×15	0.087	0.35	840	EKYA100E□□821MH15D	3,900	16×35.5	0.015	0.044	3,610	EKYA350E□□392MLP1S	
	820	10×12.5	0.080	0.32	865	EKYA100E□□821MJCS5	1.0	5×11	4.0	16	30	EKYA500E□□1R0ME11D	
	1,000	10×12.5	0.080	0.32	865	EKYA100E□□102MJCS5	2.2	5×11	2.5	10	43	EKYA500E□□2R2ME11D	
	1,200	8×20	0.069	0.27	1,050	EKYA100E□□122MH20D	3.3	5×11	2.2	8.8	53	EKYA500E□□3R3ME11D	
	1,200	10×16	0.060	0.24	1,300	EKYA100E□□122MJ16S	4.7	5×11	1.9	7.6	88	EKYA500E□□4R7ME11D	
	1,800	10×20	0.046	0.18	1,400	EKYA100E□□182MJ20S	10	5×11	1.5	6.0	100	EKYA500E□□100ME11D	
	2,200	10×25	0.042	0.17	1,650	EKYA100E□□222MJ25S	22	5×11	0.70	2.8	180	EKYA500E□□220ME11D	
	3,300	12.5×20	0.035	0.12	1,900	EKYA100E□□332MK20S	27	5×11	0.70	2.8	250	EKYA500E□□270ME11D	
	3,900	12.5×25	0.027	0.089	2,230	EKYA100E□□392MK25S	47	6.3×11	0.30	1.2	295	EKYA500E□□470MF11D	
	6,800	16×25	0.021	0.060	2,930	EKYA100E□□682ML25S	56	6.3×11	0.30	1.2	295	EKYA500E□□560MF11D	
	10,000	16×31.5	0.017	0.050	3,450	EKYA100E□□103MLN3S	100	8×11.5	0.17	0.68	555	EKYA500E□□101MHB5D	
12,000	16×35.5	0.015	0.044	3,610	EKYA100E□□123MLP1S	150	8×15	0.12	0.48	730	EKYA500E□□151MH15D		
16	47	5×11	0.40	1.6	250	EKYA160E□□470ME11D	180	10×12.5	0.12	0.48	760	EKYA500E□□181MJCS5	
	100	5×11	0.40	1.6	250	EKYA160E□□101ME11D	180	8×20	0.091	0.36	910	EKYA500E□□181MH20D	
	220	6.3×11	0.22	0.87	400	EKYA160E□□221MF11D	220	10×16	0.084	0.34	1,050	EKYA500E□□221MJ16S	
	270	6.3×11	0.22	0.87	400	EKYA160E□□271MF11D	330	10×20	0.060	0.24	1,220	EKYA500E□□331MJ20S	
	470	8×11.5	0.13	0.52	640	EKYA160E□□471MHB5D	470	10×25	0.055	0.22	1,440	EKYA500E□□471MJ25S	
	680	8×15	0.087	0.35	840	EKYA160E□□681MH15D	470	12.5×20	0.045	0.15	1,660	EKYA500E□□471MK20S	
	680	10×12.5	0.080	0.32	865	EKYA160E□□681MJCS5	560	12.5×20	0.045	0.15	1,660	EKYA500E□□561MK20S	
	820	8×20	0.069	0.27	1,050	EKYA160E□□821MH20D	820	12.5×20	0.034	0.11	1,950	EKYA500E□□821MK25S	
	1,000	10×16	0.060	0.24	1,300	EKYA160E□□102MJ16S	1,000	16×25	0.025	0.075	2,555	EKYA500E□□102ML25S	
	1,500	10×20	0.046	0.18	1,400	EKYA160E□□152MJ20S	1,200	16×25	0.025	0.075	2,555	EKYA500E□□122ML25S	
	1,800	10×25	0.042	0.17	1,650	EKYA160E□□182MJ25S	1,800	16×31.5	0.022	0.066	3,010	EKYA500E□□182MLN3S	
	2,200	12.5×20	0.035	0.12	1,900	EKYA160E□□222MK20S	2,200	16×35.5	0.019	0.057	3,150	EKYA500E□□222MLP1S	
	3,300	12.5×25	0.027	0.089	2,230	EKYA160E□□332MK25S	10	5×11	0.88	3.5	173	EKYA630E□□100ME11D	
	4,700	16×25	0.021	0.060	2,930	EKYA160E□□472ML25S	15	5×11	0.88	3.5	173	EKYA630E□□150ME11D	
	5,600	16×25	0.021	0.060	2,930	EKYA160E□□562ML25S	33	6.3×11	0.35	1.4	278	EKYA630E□□330MF11D	
25	33	5×11	0.40	1.6	250	EKYA250E□□330ME11D	56	8×11.5	0.22	0.88	500	EKYA630E□□560MHB5D	
	47	5×11	0.40	1.6	250	EKYA250E□□470ME11D	82	8×15	0.16	0.64	665	EKYA630E□□820MH15D	
	68	5×11	0.40	1.6	250	EKYA250E□□680ME11D	100	10×12.5	0.11	0.44	725	EKYA630E□□101MJCS5	
	150	6.3×11	0.22	0.87	400	EKYA250E□□151MF11D	120	8×20	0.12	0.48	820	EKYA630E□□121MH20D	
	330	8×11.5	0.13	0.52	640	EKYA250E□□331MHB5D	120	10×16	0.076	0.31	950	EKYA630E□□121MJ16S	
	390	8×15	0.087	0.35	840	EKYA250E□□391MH15D	220	10×20	0.056	0.23	1,200	EKYA630E□□221MJ20S	
	470	10×12.5	0.080	0.32	865	EKYA250E□□471MJCS5	330	10×25	0.046	0.19	1,350	EKYA630E□□331MJ25S	
	560	8×20	0.069	0.27	1,050	EKYA250E□□561MH20D	330	12.5×20	0.041	0.13	1,570	EKYA630E□□331MK20S	
	680	10×16	0.060	0.24	1,300	EKYA250E□□681MJ16S	390	12.5×20	0.041	0.13	1,570	EKYA630E□□391MK20S	
	1,000	10×20	0.046	0.18	1,400	EKYA250E□□102MJ20S	470	12.5×25	0.031	0.093	1,990	EKYA630E□□471MK25S	
	1,200	10×25	0.042	0.17	1,650	EKYA250E□□122MJ25S	560	12.5×25	0.031	0.093	1,990	EKYA630E□□561MK25S	
	1,500	12.5×20	0.035	0.12	1,900	EKYA250E□□152MK20S	1,000	16×25	0.025	0.075	2,730	EKYA630E□□102ML25S	
	2,200	12.5×25	0.027	0.089	2,230	EKYA250E□□222MK25S	1,200	16×31.5	0.021	0.063	2,850	EKYA630E□□122MLN3S	
							1,500	16×35.5	0.019	0.057	2,900	EKYA630E□□152MLP1S	
	100							1.0	5×11	4.5	15	20	EKYA101E□□1R0ME11D
							2.2	5×11	3.0	13	30	EKYA101E□□2R2ME11D	
							3.3	5×11	2.7	11	40	EKYA101E□□3R3ME11D	
							4.7	5×11	2.5	10	65	EKYA101E□□4R7ME11D	
							6.8	5×11	1.4	5.6	125	EKYA101E□□6R8ME11D	

□□ : Enter the appropriate lead forming or taping code.

KYASeries

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA _{rms} / 105°C, 100kHz)	Part No.
			20°C	-10°C		
100	10	6.3×11	0.57	2.3	205	EKYA101E□□100MF11D
	15	6.3×11	0.57	2.3	205	EKYA101E□□150MF11D
	27	8×11.5	0.36	1.4	355	EKYA101E□□270MHB5D
	39	8×15	0.25	1.0	450	EKYA101E□□390MH15D
	47	10×12.5	0.17	0.66	480	EKYA101E□□470MJC5S
	56	8×20	0.19	0.76	565	EKYA101E□□560MH20D
	68	10×16	0.11	0.47	600	EKYA101E□□680MJ16S
	100	10×20	0.084	0.34	800	EKYA101E□□101MJ20S
	150	10×25	0.069	0.28	900	EKYA101E□□151MJ25S
	180	12.5×20	0.062	0.18	1,100	EKYA101E□□181MK20S
	220	12.5×25	0.047	0.14	1,250	EKYA101E□□221MK25S
	330	16×25	0.038	0.12	1,700	EKYA101E□□331ML25S
	470	16×31.5	0.032	0.095	1,850	EKYA101E□□471MLN3S
	560	16×35.5	0.029	0.086	2,000	EKYA101E□□561MLP1S

□□ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

⊙Frequency Multipliers

Capacitance(μF)	Frequency(Hz)			
	120	1k	10k	100k
1.0 to 180	0.40	0.75	0.90	1.00
220 to 560	0.50	0.85	0.94	1.00
680 to 1,800	0.60	0.87	0.95	1.00
2,200 to 3,900	0.75	0.90	0.95	1.00
4,700 to	0.85	0.95	0.98	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) *category:*

Click to view products by [Nippon Chemi-Con](#) *manufacturer:*

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)