


CWSB21CACF-WL

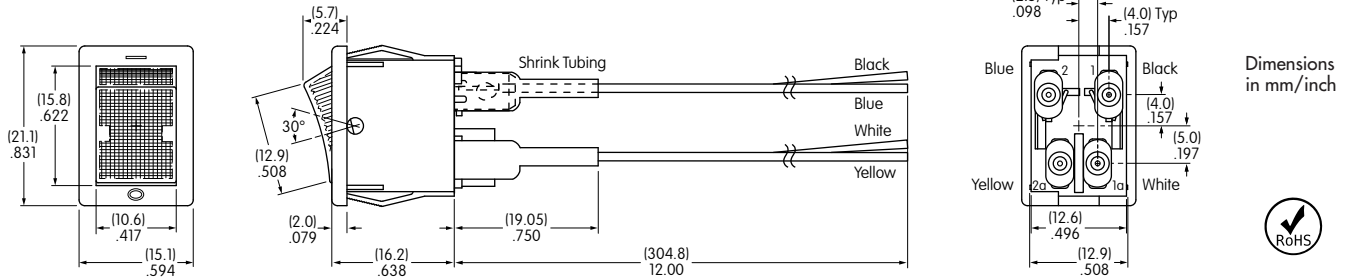


DOUBLE POLE WITH SOLDER LUG

Base Switch	Pole	Rocker Position			Connected Terminals			Throw & Switch/Lamp Schematic
		Down	Center	Up	Down	Center	Up	
CWSB21CACF	DP	ON	NONE	OFF	1-1a 2-2a	OPEN	OPEN	DPST

Wiring					Wire Specifications		Panel Cutout	
No. of Wires	Terminal 1	Terminal 1a	Terminal 2	Terminal 2a	UL1015	Temperature Range: -40°C ~ +105°C (-40°F ~ +221°F)	Panel Thickness Range: .030" ~ .079" (0.75mm ~ 2.0mm)	
4	Black	White	Blue	Yellow	600V	16 AWG Stripped Wire Ends 1/4"		

Neon Lamp Color & Specifications

The Neon lamp is factory assembled and not available separately.
The lamp circuit is synchronous to the switching circuit.
Electrical specifications are determined at a basic temperature of 25°C.



Red Illumination	Voltage (V)	125V AC
	Internal Series Resistance	33K ohms
	Current (I)	1.4mA
	Endurance (Hours)	15,000

Base Switch Specifications

Electrical Capacity (Resistive Load)

Power Level: 9A @ 125V AC

Other Ratings

Contact Resistance: 20 milliohms maximum
Insulation Resistance: 500 megohms minimum @ 500V DC
Dielectric Strength: 1,500V AC minimum between contacts for 1 minute minimum;
 3,000V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 30,000 operations minimum
Electrical Life: 10,000 operations minimum
Angle of Throw: 30°

Materials & Finishes

Rocker: Polycarbonate
Housing: Polyamide
Movable Contactor: Beryllium copper with silver plating
Movable Contacts: Silver alloy
Stationary Contacts: Silver alloy
Switch Terminals: Brass with silver plating
Lamp Terminals: Brass with silver plating

Environmental Data

Operating Temp Range: -20°C through +85°C (-4°F through +185°F)
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 0.75mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Standards & Certifications for Base Switch

UL: File No. E44145
 9A @ 125V AC
 Markings on case are standard.
CSA: File No. 0701166_0_000
 9A @ 125V AC
 Markings on case are standard.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rocker Switches](#) category:

Click to view products by [NKK Switches](#) manufacturer:

Other Similar products are found below :

[LTILA6E-1S-WH-RC-FN12VXCR1](#) [6-1571986-9](#) [8007K26N324V52](#) [8055K23Z7V](#) [8055K32Z7V](#) [8055K52Z7V](#) [8138K20E6M50](#) [84206L](#)
[84312LX](#) [PREDD5-07F-BB0GW](#) [999-16716-002](#) [999-16716-003](#) [999-16716-004](#) [A101J1V3Q004](#) [A101J2ZQ004](#) [A101J4ZQ004](#)
[A101J51CB0004](#) [A103J1ZQ004](#) [A201J1AQ004](#) [A201J3ZB004](#) [A201J50ZQ004](#) [A203J51ZQ0004](#) [A435S1YZQ](#) [H8500XBBBBL-A](#)
[H8653VBBG2577W](#) [HB130CHNWWNAAC](#) [R13112ABB-602W](#) [1251.0303](#) [AE205J60V3B004](#) [1352.0107](#) [1500G51E](#) [1571099-3](#)
[1571987-4](#) [1571987-5](#) [1571989-7](#) [1571988-5](#) [B123J77V7B2](#) [B226J50W4Q22P](#) [B433J37ZQ22M](#) [160212E](#) [1634200-7](#) [1801.1164](#) [1839.1502](#)
[PANEL-PLUG-VHP-BLACK](#) [PANEL-PLUG-VHP-WT](#) [K1ABBSCADN](#) [K2ABAAAAAA](#) [KG312A2DXD246X](#) [250011E714](#) [2600HM11E](#)