


DESCRIPTION: HIGH DENSITY FEMALE PIN & LOAD

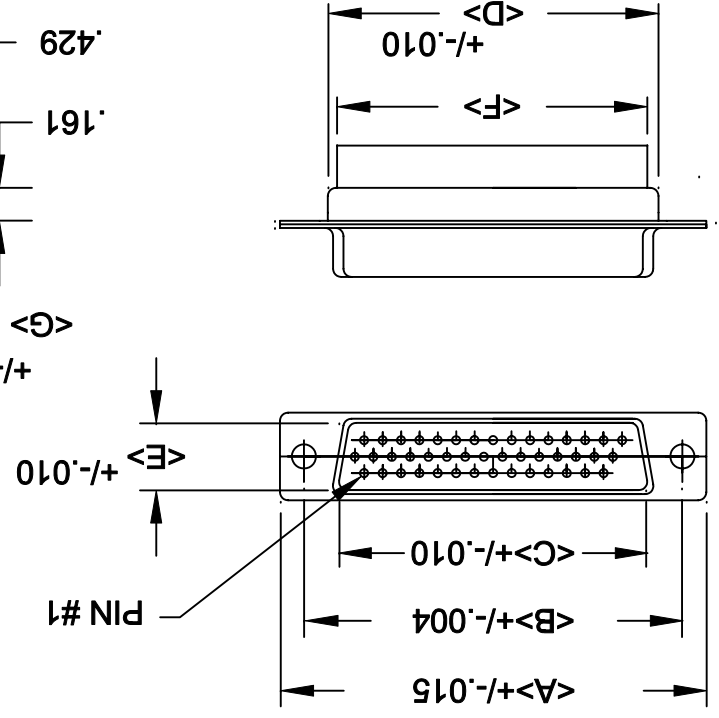

SPECIFICATIONS:

MATERIALS:
 SHELL: STEEL, TIN PLATED
 INSULATOR: UL 94V-0 RATED BLACK PBT
 +30% FIBER-GLASS OR NYLON-66

ELECTRICALS:

CURRENT RATING: 2 AMPS
 CONTACT RESISTANCE: 15 MOHMS MAX
 INSULATOR RESISTANCE: 1000 MOHMS MIN
 VOLTAGE: 500V AC FOR 1 MINUTE
 TEMPERATURE: -50°C TO +100°C

NorComp



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS		DATE: 8-12-98	
CHECKED:		DATE:	
SCALE:		SHEET OF	
DWG NO. 180-XXX-272-XX0		REV 3	


- 180-XXX-272-XX0 SERIES POSITIONS
- 015
 - 026
 - 044
 - 062
 - 078
- GENDER
- 1 = MALE
 - 2 = FEMALE
- TERMINATION
- 7 = CRIMP/POKE
- SHELL PLATING
- 2 = TIN
- HARDWARE OPTIONS
- 00 = NO HARDWARE
 - 01 = .065 4-40 CLINCH NUT BOARD SIDE
 - 02 = .250 4-40 CLINCH NUT BOARD SIDE
 - 03 = .250 4-40 CLINCH NUT MATING SIDE
 - 91 = .225 4-40 SPACER/BOARD LOCK
- PLATING OPTIONS
- 0 = NO CONTACTS

15	1.213	0.984	0.644	0.756	0.311	0.606	0.496
26	1.543	1.312	0.966	1.091	0.311	0.954	0.496
44	2.087	1.852	1.512	1.618	0.311	1.498	0.496
62	2.732	2.500	2.156	2.256	0.311	2.147	0.496
78	2.083	2.406	2.057	2.169	0.429	2.043	0.606


POS. A B C D E F G

ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS



03X.....,250" (MATING SIDE) - CN8



02X.....,250" (BOARD SIDE) - CN2



01X.....,098" (BOARD SIDE) - CN1

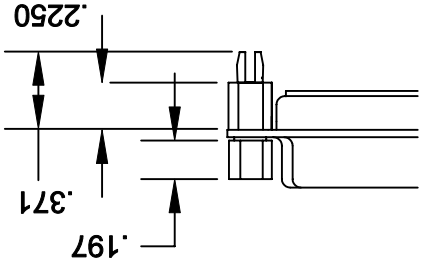

91X.....,225" (BOARD SIDE) - CN10/SFS0440
 NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

THESE DRAWINGS AND SPECIFICATIONS
 ARE THE PROPERTY OF NorComp AND
 SHALL NOT BE REPRODUCED, COPIED
 OR USED AS THE BASIS FOR THE
 MANUFACTURE OF SALE OF APPARATUS
 WITHOUT WRITTEN PERMISSION.



NorComp

DWG NO.

CLINCH-NUT OPTIONS

SCALE:

SHEET

OF

1

REV 1

CHECKED:

PAM JENKINS

DATE:

8-24-98

DRAWN:

WAYNE ROBBINS

DATE:

8-23-98

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub High Density Connectors](#) category:

Click to view products by [NorComp](#) manufacturer:

Other Similar products are found below :

[1484349-1](#) [163A16769X](#) [163A16809X](#) [163A17089X](#) [164A17199X](#) [164A17209X](#) [164A17479X](#) [164A18209X](#) [17BH-044S-AA110](#) [K86X-AD-26S](#) [KF66X-A26P-NJ](#) [KF66X-E15P-N](#) [241A17320X](#) [242A18390X](#) [242A25740X](#) [L717HDB44POL2R210](#) [L717HDCH62POL2RM5](#) [L717HDEH15POL2](#) [L777HDE15P](#) [L77HDC62S](#) [L77HDE15SC309](#) [163A16779X](#) [163A16839X](#) [163A17049X](#) [163A17079X](#) [164A17309X](#) [164A17329X](#) [164A18219X](#) [241A16440X](#) [241A16550X](#) [241A16680X](#) [241A17390X](#) [241A20810X](#) [241A25740X](#) [CT25-44P](#) [K66X-E15S-N30](#) [K86X-BA-44S](#) [K86X-ED-15S-BR15](#) [K86X-ED-15SK](#) [L177HDE15SOL2RM23](#) [L177HRC62S](#) [L177HRC62SVFM](#) [L177HRCG62S](#) [L717HDBH44POL2RM5](#) [L717HDEG15POL2RM5](#) [L77HDA26SVF](#) [L77HDE15SD1CO](#) [L77HDEH15SOL2RM832](#) [DAMA-15S-WS](#)
[443895-3](#)