
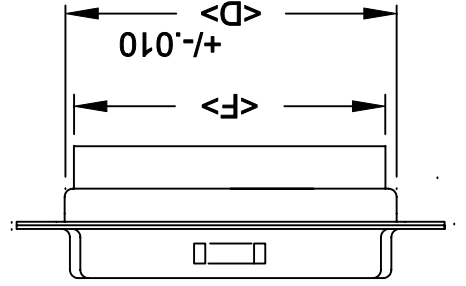
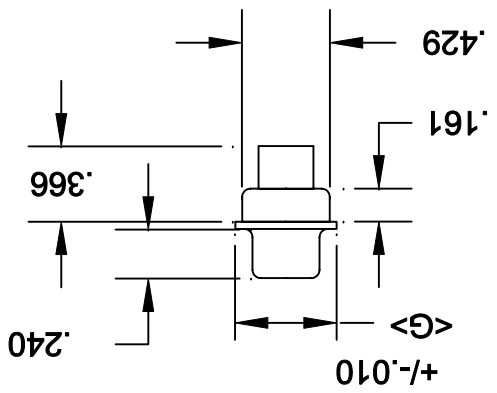


DESCRIPTION: HIGH DENSITY MALE PIN & LOAD

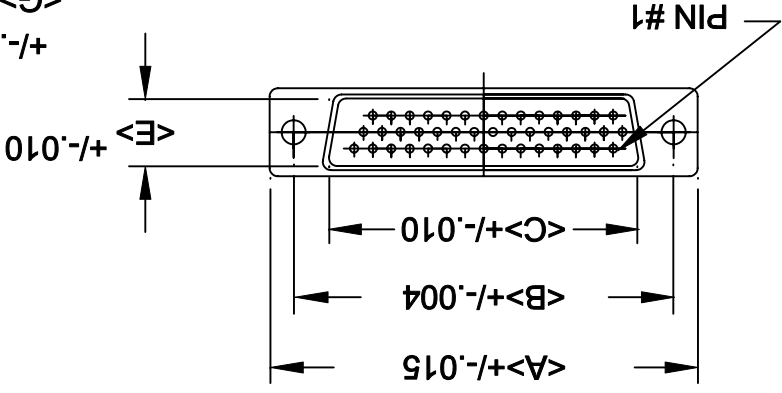

**SPECIFICATIONS:**

**MATERIALS:**  
 SHELL: STEEL, TIN PLATED  
 INSULATOR: UL 94V-0 RATED BLACK PBT  
 +30% FIBER-GLASS OR NYLON-66

**ELECTRICALS:**

CURRENT RATING: 2 AMPS  
 CONTACT RESISTANCE: 15 MOHMS MAX  
 INSULTOR RESISTANCE: 1000 MOHMS MIN  
 VOLTAGE: 500V AC FOR 1 MINUTE  
 TEMPERATURE: -50°C TO +100°C

# NorComp



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS		CHECKED:		DATE: 8-12-98	
SCALE:		SHEET OF		REV 3	
DWG NO. 180-XXX-172-XX0					

POS.	A	B	C	D	E	F	G
15	1.213	0.984	0.666	0.756	0.329	0.606	0.496
26	1.543	1.312	0.994	1.091	0.329	0.954	0.496
44	2.087	1.852	1.534	1.618	0.329	1.498	0.496
62	2.732	2.500	2.181	2.256	0.329	2.147	0.496
78	2.083	2.406	2.079	2.169	0.445	2.043	0.606

180-XXX-172-XX0 SERIES POSITIONS

015 026 044 062 078 GENDER

1 = MALE  
 2 = FEMALE

TERMINATION

7 = CRIMP/POKE  
 2 = TIN

HARDWARE OPTIONS


00 = NO HARDWARE  
 01 = .098 4-40 CLINCH NUT BOARD SIDE  
 02 = .250 4-40 CLINCH NUT BOARD SIDE  
 03 = .250 4-40 CLINCH NUT MATING SIDE  
 91 = .225 4-40 SPACER/BOARD LOCK

PLATING OPTIONS


0 = NO CONTACTS

ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS



03X.....,250" (MATING SIDE) - CN8



02X.....,250" (BOARD SIDE) - CN2



01X.....,098" (BOARD SIDE) - CN1

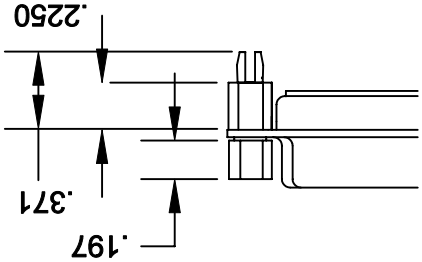

91X.....,225" (BOARD SIDE) - CN10/SFS0440  
 NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

THESE DRAWINGS AND SPECIFICATIONS  
 ARE THE PROPERTY OF NorComp AND  
 SHALL NOT BE REPRODUCED, COPIED  
 OR USED AS THE BASIS FOR THE  
 MANUFACTURE OF SALE OF APPARATUS  
 WITHOUT WRITTEN PERMISSION.



# NorComp

DRAWN: WAYNE ROBBINS		DATE: 8-23-98	
CHECKED: PAM JENKINS		DATE: 8-24-98	
SCALE: SHEET 1 OF 1		REV 1	
DWG NO. CLINCH-NUT OPTIONS			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub High Density Connectors](#) category:*

*Click to view products by [NorComp](#) manufacturer:*

Other Similar products are found below :

[1484349-1](#) [163A16769X](#) [163A16809X](#) [163A17089X](#) [164A17199X](#) [164A17209X](#) [164A17479X](#) [164A18209X](#) [17BH-044S-AA110](#) [K86X-AD-26S](#) [KF66X-A26P-NJ](#) [KF66X-E15P-N](#) [241A17320X](#) [242A18390X](#) [242A25740X](#) [L717HDB44POL2R210](#) [L717HDCH62POL2RM5](#) [L717HDEH15POL2](#) [L777HDE15P](#) [L77HDC62S](#) [L77HDE15SC309](#) [163A16779X](#) [163A16839X](#) [163A17049X](#) [163A17079X](#) [164A17309X](#) [164A17329X](#) [164A18219X](#) [241A16440X](#) [241A16550X](#) [241A16680X](#) [241A17390X](#) [241A20810X](#) [241A25740X](#) [CT25-44P](#) [K66X-E15S-N30](#) [K86X-BA-44S](#) [K86X-ED-15S-BR15](#) [K86X-ED-15SK](#) [L177HDE15SOL2RM23](#) [L177HRC62S](#) [L177HRC62SVFM](#) [L177HRCG62S](#) [L717HDBH44POL2RM5](#) [L717HDEG15POL2RM5](#) [L77HDA26SVF](#) [L77HDE15SD1CO](#) [L77HDEH15SOL2RM832](#) [DAMA-15S-WS](#)  
[443895-3](#)