

DIMENSIONS No. OF В С PINS 1.213 0.984 0.666 9 30.81 24.99 16.92 1.541 1.312 0.994 15 39.14 33.32 25.25 2.088 1.852 1.534 25 53.04 47.04 38.96 2.729 2.500 2.181 37 69.32 63.50 55.42

MATERIALS:

SHELL: SPCC, NICKEL PLATED
INSULATOR: BLACK PA9T NYLON, UL 94V-O
CONTACTS: BRASS, GOLD PLATED

NTACTS: BRASS, GOLD PLATED
RIVET: COPPER ALLOY, NICKEL PLATED


SCREWLOCK: ZINC ALLOY, NICKEL PLATED

BOARDLOCK: SPCC, TIN PLATED

ELECTRICAL:


CURRENT RATING: 5 AMPS

INSULATOR RESISTANCE: 1,000 MEGOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC RMS
TEMPERATURE: -55° C to +105° C

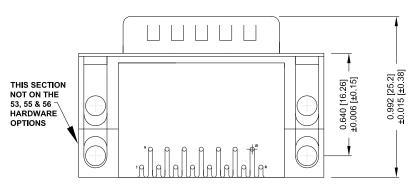


BOTTOM VIEW

ROHS COMPLIANT




DO NOT SCALE FROM DRAWING

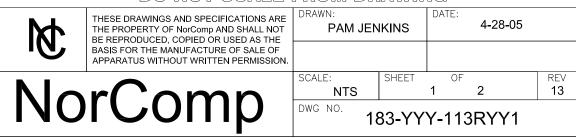

	0.141 ±0.020	METAL SHELL	METAL SHELL FORK BOARD LOCKS	0.500 METAL SHELL FORK BOARD LOCKS
0.120" DIA. HOLE	16	N/A	N/A	55
4-40 FLUSH INSERT	17	45	57 BOARD LOCKS IN REAR HOLE (0.590")	53 BOARD LOCKS IN FRONT HOLE (0.590")
4-40 HEX STANDOFF FEMALE SCREWLOCK	18	48	54 BOARD LOCKS IN REAR HOLE	56 BOARD LOCKS IN FRONT HOLE
4-40 ROUND STANDOFF FEMALE SCREWLOCK	N/A	N/A	N/A	N/A

DO NOT SCALE FROM DRAWING

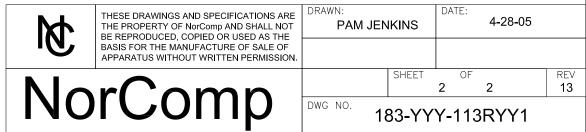

ROHS COMPLIANT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Standard Connectors category:

Click to view products by NorComp manufacturer:

Other Similar products are found below:

56F711-015 LV242999-142T12 015-0341-000 015-0372-005 015-0372-008 015-8755-001 020419-0104 012-0467-000 012-9507-034 012-9507-114 020745-0008 609-25P CT2-14S-2PCA34 CT2-18-11PCAU CT6-10SL-3SC CT6-10SL-4SC CT6-14S-2SC CT6E14SA7SC M83513/01-FC M83723/76W24619 L/C M85049/48-3-2F 6STD09PCM99B70X 6STD09SCM99B30X 6STD09SCT99S40X 6STD15PCT99S40X 6STD15SCM99B30X 6STD15SCT99S40X 6STF09PCM05B70X 7-135760-9 MC11E-10-6SN 747552-3 MD1-21PS MDM-15SCBRM7-F222 MDM96517-699 MDM96521-744 MDVB1-21SL1 MIK0-1-7SH003 MIKQ6-7SH076 MIKQ7-7PH077 MIKQ7-7PH11 MIKQ7-7PH32 MJSV-28SL61 MKJ4A1F14-55S 8-135760-3 8STD09PCM99B30X PG-KV/PV-16-GROM-SEALING GDA15P GDAY15PB 980-0000-170 980-0000-171