
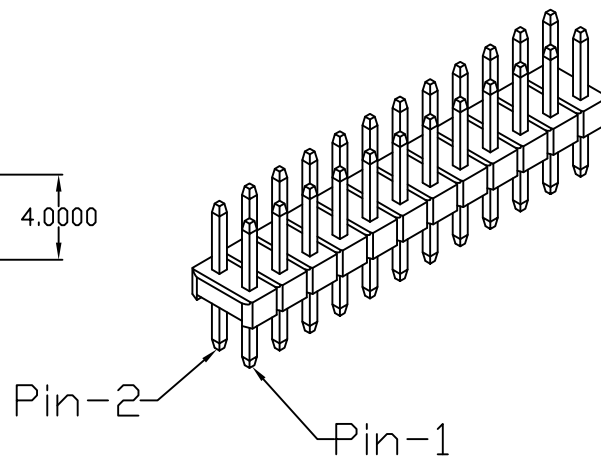


**MATERIAL // ELECTRICAL SPECIFICATIONS**




CURRENT RATING: 2A  
 VOLTAGE RATING: 250VAC (r.m.s.)  
 INSULATOR RESISTANCE: 5000 MOhms MIN  
 CONTACT RESISTANCE: 20 mOhms MAX  
 OPERATING TEMPERATURE: -40°C TO 105°C  
 PROCESS TEMP: 260°C MAX  
 CONTACT MATERIAL: COPPER ALLOY  
 INSULATOR MATERIAL: PA6T // UL94V-0 // BLACK

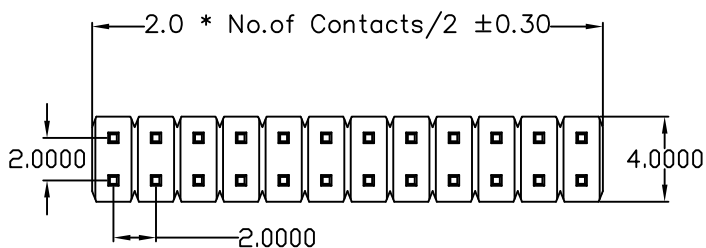

**2664YY01RP2**

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 02-72 = DUAL - INCREMENTS OF 2  
 TYPE \_\_\_\_\_  
 01 = STRAIGHT  
 PLATING \_\_\_\_\_  
 P2= GOLD FLASH ENTIRE CONTACT

Recommended P.C. Board  
 Hole Layout

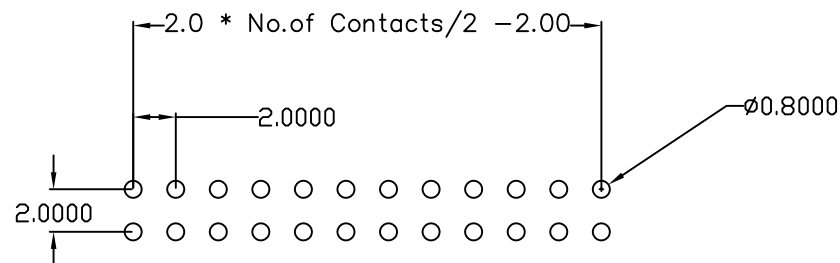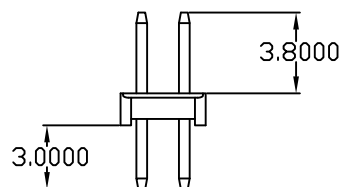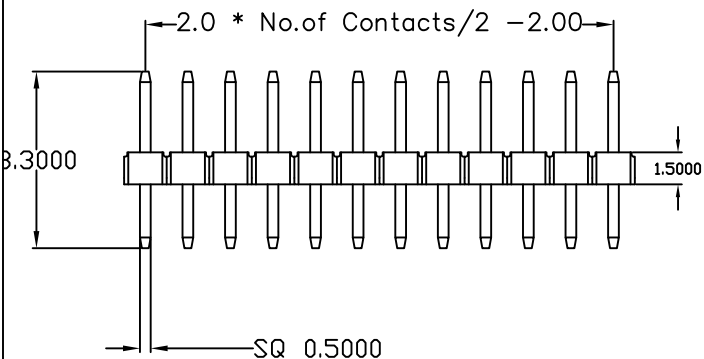

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
**P. JENKINS**  
 DATE:  
 01/27/2006

TOLERANCE  
 .X ±0.3  
 .XX ±0.20  
 .XXX ±0.100

**NorComp**

SCALE: NTS	SHEET 1	OF 1	REV 3
DWG NO.		2664YY01RP2	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [NorComp](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)