

NOTE:

MATERIAL

INSULATOR LCP UL94V-0, BLACK

CONTACT BRASS, 15u" GOLD PLATING

SHELL ZINC ALLOY, NICKEL 60u"-100u"

ELECTRICAL

RATED CURRENT 2A VOLTAGE 60VDC


INSULATOR RESISTANCE 1000 MOhms MIN.
CONTACT RESISTANCE 30 mOhms MAX.
WIRE AWG 26 AWG MAX

ENVIRONMENT

OPERATION TEMPERATURE -40°C TO +125°C

\*\*NOT DESIGNED TO MATE WITH NORCOMP 380 // 381 // 960 SERIES & NORCOMP MICRO-D CABLE ASSEMBLIES USING THE 960 SERIES CONNECTORS. IF ANY QUESTIONS PLEASE CONTACT ENG@NORCOMP.NET

DIMENSIONS(mm)					
SIZE	A	В	С	D	E
9	19.55	14.35	5.08	3.81	8.20
15	23.36	18.20	8.89	7.62	12.00
25	29.70	24.55	15.24	13.97	18.35

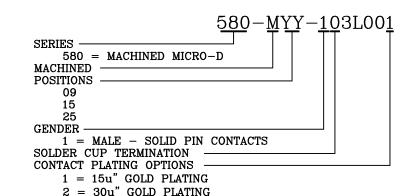

ROHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NOrComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

05/12/2020

TOLERANCES
.x ±0.20
.xx ±0.10
.xxx ±0.05
.xxxx ±0.03
ANGULAR ±1

NESTED

PLUG

CONTACT

UNITS = mm

## DO NOT SCALE FROM DRAWING

NorComp

SCALE: SHEET OF 1 1 DWG NO.

580-MYY-103L001

REV

2

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Micro-D Connectors category:

Click to view products by NorComp manufacturer:

Other Similar products are found below:

89076GBEPR 65-1920-15 M83513/03-G09N M83513/03-G12N M83513/04-E15N M83513/04-G04C 664020C06F060 6R2004A30F015
6R4006A28A120 704002A03F200 705001A13F120 7-1532020-5 748567-1-P MDB1-9SH001 MDM-100PH003L MDM-15PBS-L58
MDM-15PCBRM7T MDM-15PH001M7-A174 MDM-15PH003B-A174 MDM-15SH003A MDM-15SH004B MDM-15SH006A-A174
MDM-15SH048B MDM-25PH003B-A174 MDM-25SH003F MDM-25SH003K MDM-31PH003L MDM-37PH006L-A174 MDM37SH003K MDM51PH016FA174 MDM-51PSF MDM-9PH003M7 MDM-9SH001P MDM-9SH006B 790-027SH-10P4MEP 790-041PJ25P2MPA 790-043PJ-7P7MPB 791-004SH-66MSA 7R3A00A19A1201 7R5006A19A120 803000C02M020 803001B02M040
803001D01M040 8030N1A09M020 804001B03M100 804006B03M100 804006C02M030 MLDM2L-21SCBRP-.110 85043GULSR
883020E03M030