

SPECIFICATIONS:

MATERIALS:


HOUSING:	PBT, UL94 V-0, BLACK
CONTACTS:	10u" GOLD PLATED BRASS
NUT:	NICKEL PLATED BRASS
SHELL:	NICKEL PLATED BRASS
ORING:	NBR

ELECTRICAL:

RATED CURRENT:	3A (3/4P)
RATED VOLTAGE:	60V (3/4P)
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.


ENVIRONMENT:

OPERATING TEMPERATURE:	-40°C TO +85°C
WATER PROOF:	IP67

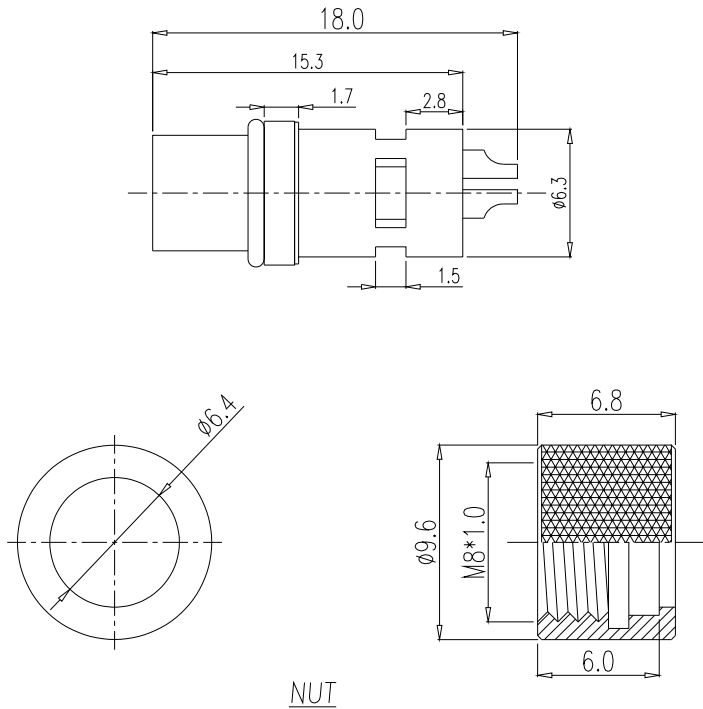

854-YYY-203RSS4

003 = 3 POSITION
004 = 4 POSITION

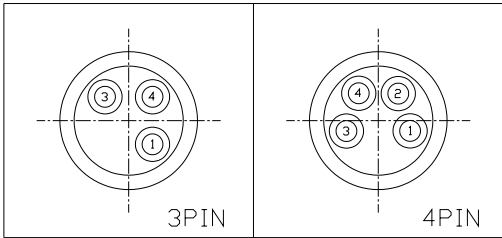

MATING SIDE VIEW

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
J. KADEL
DATE:
09/12/2023

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET 1 OF 1

REV 0

DWG NO.

854-YYY-203RSS4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) ***category:***

Click to view products by [NorComp](#) ***manufacturer:***

Other Similar products are found below :

[600X518037X](#) [8R5000A16M005](#) [1-3637-600-5205](#) [1545399](#) [1A4000-348](#) [8R5006A18A120](#) [1R3006A20M005](#) [1R3006A20M030](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [41-40005](#) [XS3P-M421-2](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#) [8R5006A16M005](#) [7A3006-32](#) [1R3004A20A1201](#) [N03FA03144](#) [1406328](#) [XS2RD4265](#) [080804EMF00000](#) [XS2R-D426-1](#) [XS8A-0441](#) [2273142-2](#) [41-50000](#) [41-50002](#) [ASB 8-S3064/5 M](#) [43-02534](#) [MA1LKE1700](#) [1400943](#) [8R4006A16M020](#) [WR8U26E02C300](#) [8R5000A16M020](#) [1R3000A20M050](#) [884A30K05M006](#) [1200910005](#) [1201010003](#) [2168083-2](#) [RC-Z2062](#) [SACC-MSQ-M12MS-25-3 2 SCO](#) [SACC-E-FSB-5CON-M16/0 5 SC](#) [SACC-DSI-FS-4CON-PG9/2 0UL](#) [SACC-1/2 NPT-LOCKNUT](#) [BEDC854NN0000052A000](#) [BKUA854NN0086155A000](#) [T4145515021-002](#)