
DESCRIPTION: M12 FEMALE - PANEL MOUNT (REAR) - 8 POS. - X-CODE - ROTATED

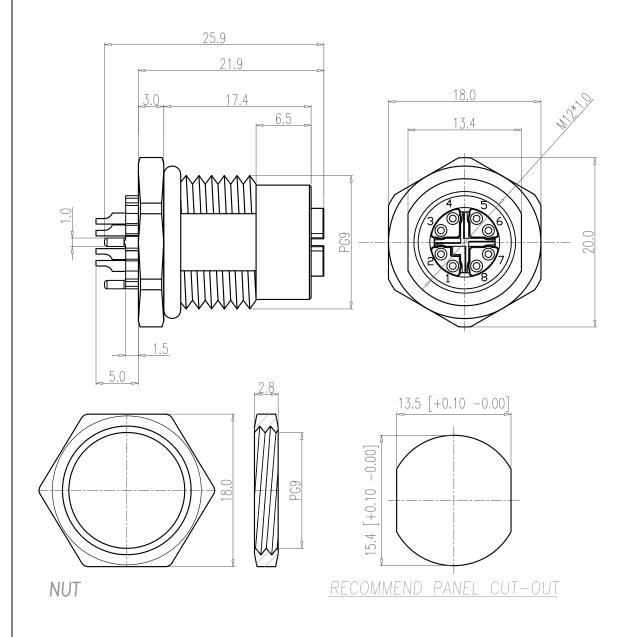

NOTE: MATERIAL HOUSING: PA66 UL94V-0, BLACK CONTACT: **BRASS** NUT: **BRASS** SHELL: **BRASS** □-RING: EPDM, BLACK ZINC ALLOY X-SHELL: **FINISH** CONTACT: GOLD 104" MIN. □VER 504" NICKEL NUT: NICKEL PLATED SHELL: NICKEL PLATED X-SHELL: NICKEL PLATED **ELECTRICAL** RATED CURRENT: 0.5A RATED VOLTAGE: 50VAC/60VDC INSULATION RESISTANCE: 100 MOhms MIN. CONTACT RESISTANCE: 10 mDhms MAX. WATER PROOF: IP67 **ENVIRONMENT OPERATION TEMPERATURE:** -40°C TD +85°C MAX WIRE AWG: 24

## 859-X08-203R0RY

4 = 10u″ GOLD

ROHS COMPLIANT

区

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

05/02/2019

UNITS = mm

## DO NOT SCALE FROM DRAWING



SCALE:	SHEET	OF		REV
NTS	1		1	2
DWG NO.	359-X0	)8-20	D3R0RY	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Metric Connectors category:

Click to view products by NorComp manufacturer:

Other Similar products are found below:

600X518037X 6STD15PCR99B70A 8R4000A16M020 8R5000A16M005 1200910002 1203580030 1200910008 1200910011 1300140094 130203-0054 1300140026 1300150099 RF-12S1N8A90DU 1-3637-600-5205 1612618 21036836414 8R4006A16M010 1604232 1R3006A20M005 RF-12P1N8A90DU 41-40011 42-00006 42-01015 4-22279-4 4-22281-1 4-22284-9 43-00113 43-01088 43-01203 41-40013 42-00008 43-00343 43-01026 43-01162 43-01173 43-10000 XS3P-M421-2 600X518050X SACC-DSI-FS-5P-PG9-L180 SC 8R5006A16M020 8R5006A16M005 8R4000A16M010 6-22279-3 1605332 N03FA03144 1300140077 43-16213 43-01338 XS2RD4265 XS2R-D426-1