




DESCRIPTION: 988 SERIES BACK SHELL KIT

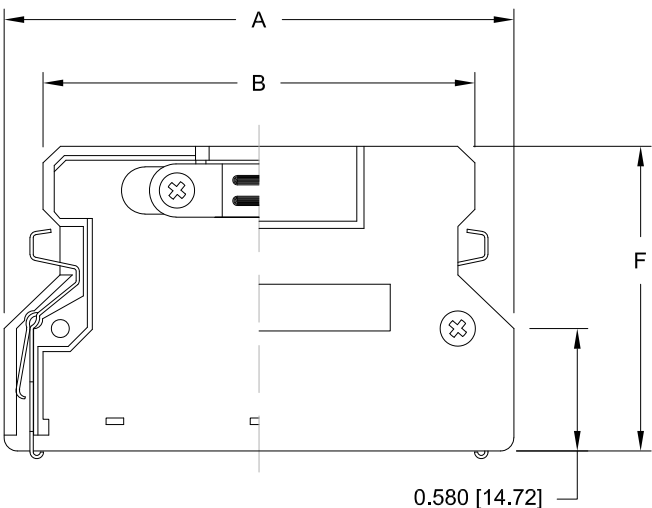


STRAIN RELIEF CLAMP

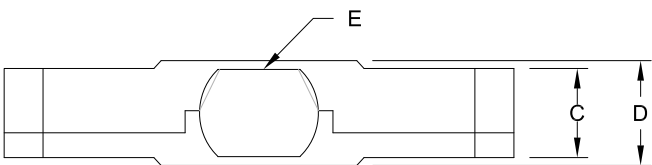


STRAIN RELIEF SCREW



BACK SHELL SCREW



SPRING CLIP



No. OF PINS	DIMENSIONS					
	A	B	C	D	E	F
50	1.988 [50.50]	1.594 [40.50]	0.422 [10.71]	0.498 [12.65]	0.354 [9.00] - 0.433 [11.00]	1.445 [36.70]
68	2.409 [61.20]	2.020 [51.30]	0.421 [10.70]	0.480 [12.20]	0.433 [11.00] - 0.551 [14.00]	2.453 [36.90]
ALL TOLERANCES = 0.012 [0.30]						

MATERIAL:

- BACK SHELL: ZINC PLATED NICKEL OVER COPPER
- JACKSCREWS: STEEL, NICKEL PLATED OVER COPPER
- SCREWS: STEEL, NICKEL PLATED OVER COPPER
- CLAMP: STEEL, NICKEL PLATED

KIT INCLUDES:

- 2-BACK SHELL HALVES
- 1-STRAIN RELIEF CLAMP
- 1-CONNECTOR (SOLDER LATCH)
- 2-STRAIN RELIEF SCREWS (FLAT HEAD M2.6)
- 2-BACK SHELL SCREWS (FLAT HEAD M2.6)
- 2-SPRING CLIPS

**BACK SHELL KIT
PART NUMBER
988-YYY-130L121**

- SERIES _____
- POSITIONS _____
- 050 _____
- 068 _____
- CONTACTS _____
- SOLDER _____
- MATERIAL _____
- 30 = DIE CAST (NICKEL)
- RoHS COMPLIANT _____
- L = LOW TEMP. PROCESS _____
- COLOR _____
- 12 = METAL(IZED)
- PUT-UP _____
- 1 = KIT

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

04/18/2008

NorComp

SCALE:

NTS

SHEET

1

OF

3

REV

5

DWG NO.

988-YYY-130L121

DESCRIPTION: CONNECTOR FOR 988 SERIES BACK SHELL KIT




No. OF PINS	DIMENSIONS		
	A	B	C
50	1.545 [39.30]	1.372 [34.85]	0.366 [9.30]
68	1.996 [50.70]	1.825 [46.35]	0.366 [9.30]

MATERIAL:

HOUSING: THREMOPLASTIC, BLACK, P.B.T. UL94V-0
 CONTACTS: PHOSPHOR BRONZE, 5u" GOLD MATING AREA
 FRONT SHELL: STEEL, NICKEL PLATED OVER COPPER


ELECTRICAL:

CURRENT RATING: 1 AMPS
 INSULATOR RESISTANCE: 500 MOHMS Min.
 DIELECTRIC WITHSTANDING: 500VAC
 CONTACT RESISTANCE: 35 mOhms Max.
 OPERATING TEMPERATURE: -55° ~ +85° C

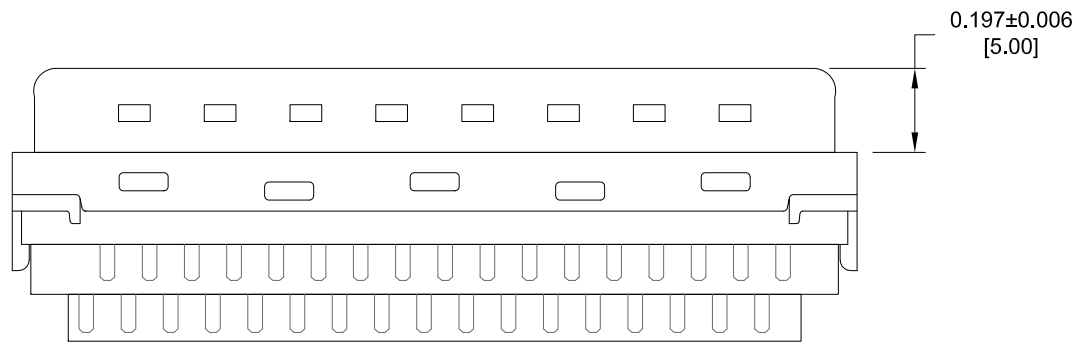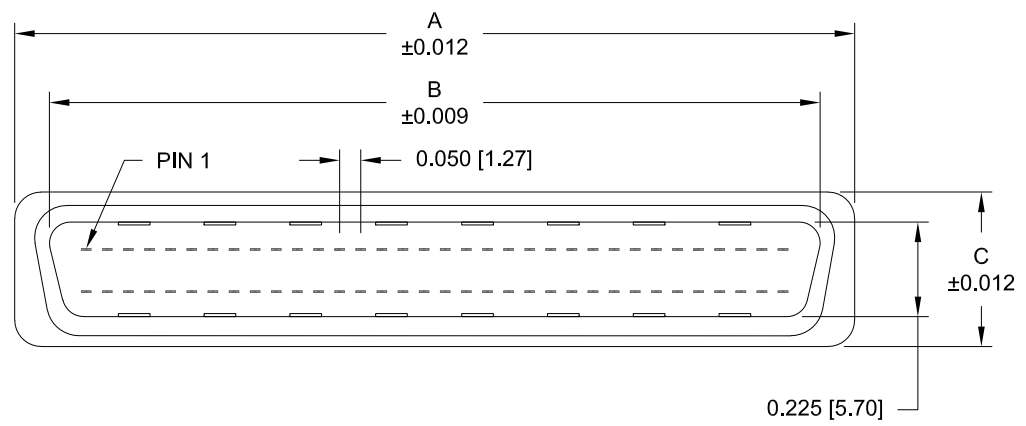

RoHS COMPLIANT



UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH
		DATE: 04/18/2008





NorComp

SCALE: NTS	SHEET 2	OF 3	REV 5
DWG NO.		988-YYY-130L121	

50 POSITION

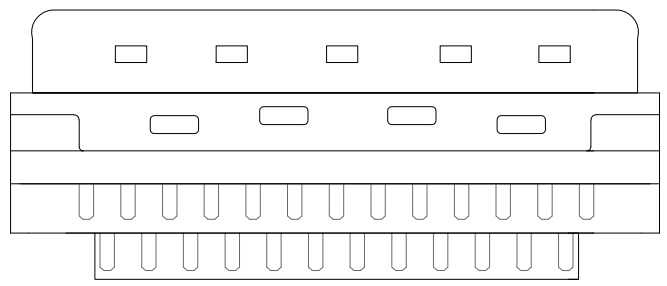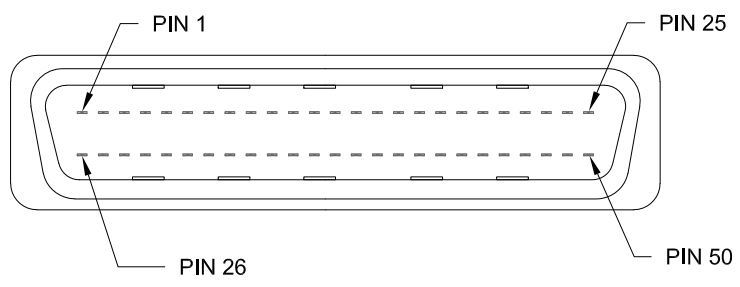


68 POSITION

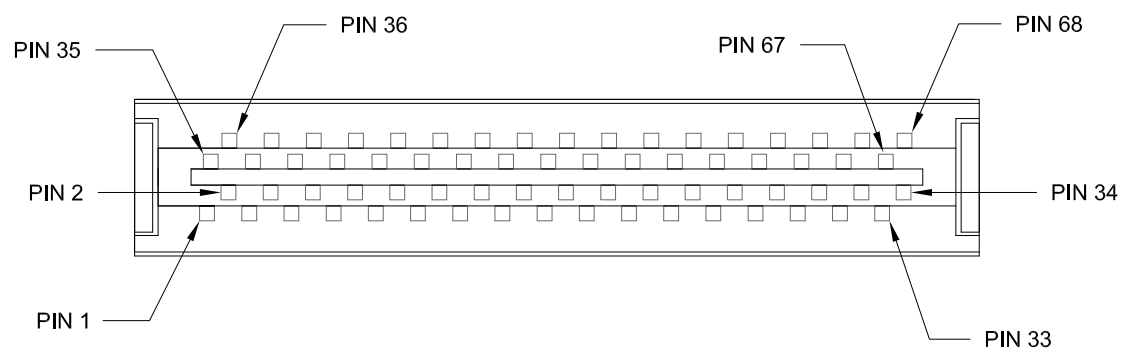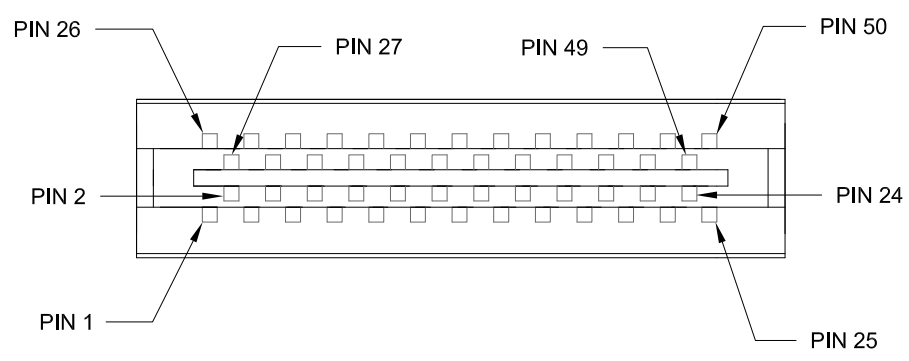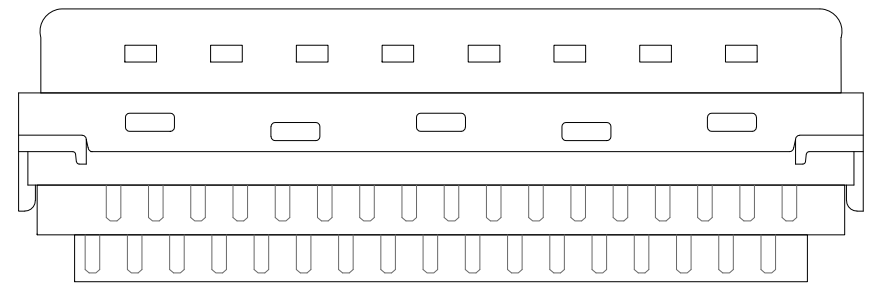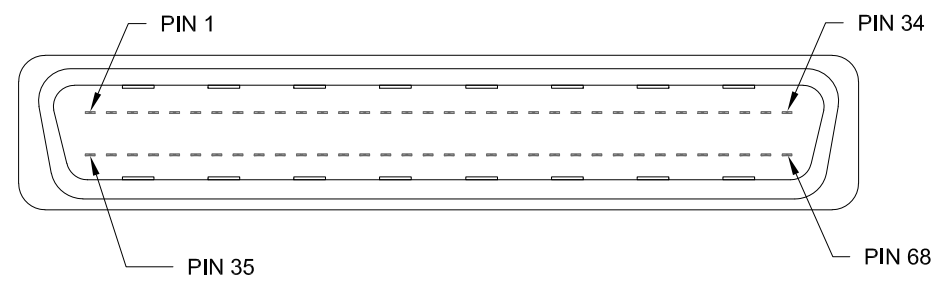

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH
		DATE: 04/18/2008

NorComp

SCALE: NTS	SHEET 3 OF 3	REV 5
DWG NO. 988-YYY-130L121		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Backshells](#) category:

Click to view products by [NorComp](#) manufacturer:

Other Similar products are found below :

[600X51137X](#) [600X54009X](#) [66241-12A](#) [M85049/6-38N](#) [M85049/86-12N03](#) [M85049/90-13P03](#) [70.350.0636.4](#) [70.350.2435.1](#) [72.350.1035.2](#)
[72.352.2435.1](#) [73.359.4035.3](#) [829472-1](#) [PCS-E20W](#) [970-015-040R011](#) [971-009-030R121](#) [971-009-040R011](#) [971-015-040R011](#) [DPH-B-003](#)
[1437013-9](#) [1484402-8](#) [156-3025-EX](#) [16-500800](#) [165X02659X](#) [165X03329A](#) [165X03399A](#) [165X10259X](#) [165X11359X](#) [165X11759X](#)
[165X11889X](#) [165X11899X](#) [165X13019X](#) [165X13029X](#) [165X13169X](#) [165X13199X](#) [165X13239X](#) [165X13389X](#) [165X13489X](#)
[165X14219X](#) [165X14429X](#) [165X14449X](#) [165X17409X](#) [165X17439X](#) [165X17569X](#) [165X17599X](#) [165X17609X](#) [165X17889X](#)
[165X17979X](#) [L171373](#) [971-025-030R121](#) [300X10989X](#)