
DESCRIPTION: DSUB IP67 FLANGE // MALE // COMBO // SOLDER CUP

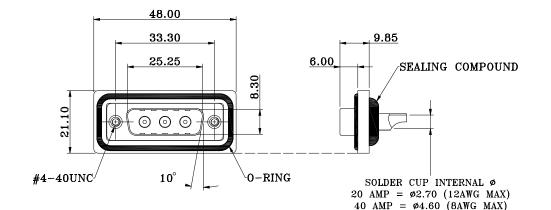

NOTE:


MATERIAL	
HOUSING	
FLANGE	
CONTACT	
SHELL	
0-RING	
SEALING	COMPOUND
HARDWARE	


ELECTRICAL


POWER CONTACT RATED CURRENT VOLTAGE INSULATOR RESISTANCE POWER CONTACT RESISTANCE WATER PROOF ENVIRONMENT OPERATION TEMPERATURE PBT UL94V-0, BLACK PBT UL94V-0, BLACK BRASS, PLATING P/N KEY BELOW STEEL, NICKEL SILICONE EPOXY BRASS; NICKEL PLATED


P/N KEY BELOW 1000 VAC 1 MIN 5 GOhms MIN. 1.0 mOhms MAX. IP67

-25°C TO +85°C





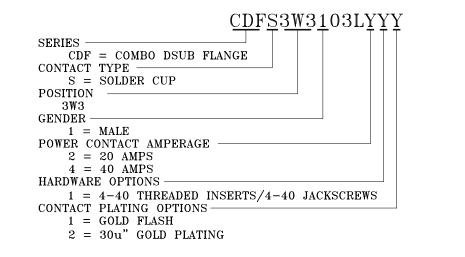



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Mixed Contact Connectors category:

Click to view products by NorComp manufacturer:

Other Similar products are found below :

790-025SF-5P5NMN790-025SJ-7P7NMLDAM-7W2PCL717TWB5W5P3RL717TWB5W5PRM84L717TWP3W3P3003W3PXX56N40X3005W5PXX99E40X3005W5SXX99A30X3005W5SXX99E40X3013W6SCM99A10X3036W4PCM41A10X3036W4SCM99A10XFCE17-E2W2SS-2N0212522-7PII-468-13003W3PXX43A10X3003W3SXX56N40X3005W5PXX88N40X3008W8SXX57A30X3009W4PCT57P20X3011W1SXK99A10X3017W2SAR69C40X3024W7SCM99A10X321WA4PXK99A60X3F3SSC22S41A30XL717TWA7W2PP2SY3RDBM-17W2S-1A8N-A190-A197-1421WA4PCR50E20X09691009009096911000225000969300917609692009147096939090156017W2PCM41B30X790-061SH-36W2NMNA790-044SE-7P3MNPB790-043PE-11P2MPA790-043PB-2P2MPB790-029SB-2P2MEPA790-028PK-9P9MPA790-028PH-54P2MGA790-028PH-36P2MNA790-028PB-2P2MPA790-028PB-2P2MPA027SH-5W5MTEP790-026PH-54P2ZNUG790-026PH-54P2MP790-026PH-36P2ZNUG790-026PH-36P2MG790-026PD-3P3MP