


# 5X7 Dot Character VFD Module

# CU16025-UW6J

- ❑ 2 X 16 Characters 5mm High
- ❑ LCD Compatible Design
- ❑ Operating Temp -40°C to +85°C
- ❑ Single 5V Supply with Power Save Mode
- ❑ High Brightness Blue Green Display
- ❑ Selectable 4/8 bit M68/i80 Parallel & Serial Interface
- ❑ ASCII + Extended Character Font
- ❑ 8 User Definable Character RAM
- ❑ 4 Level Brightness Control Function

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus which can be set to M68 or i80 series interface by a solder link on the module. Brightness control and power down functions are provided. A full data sheet is available.

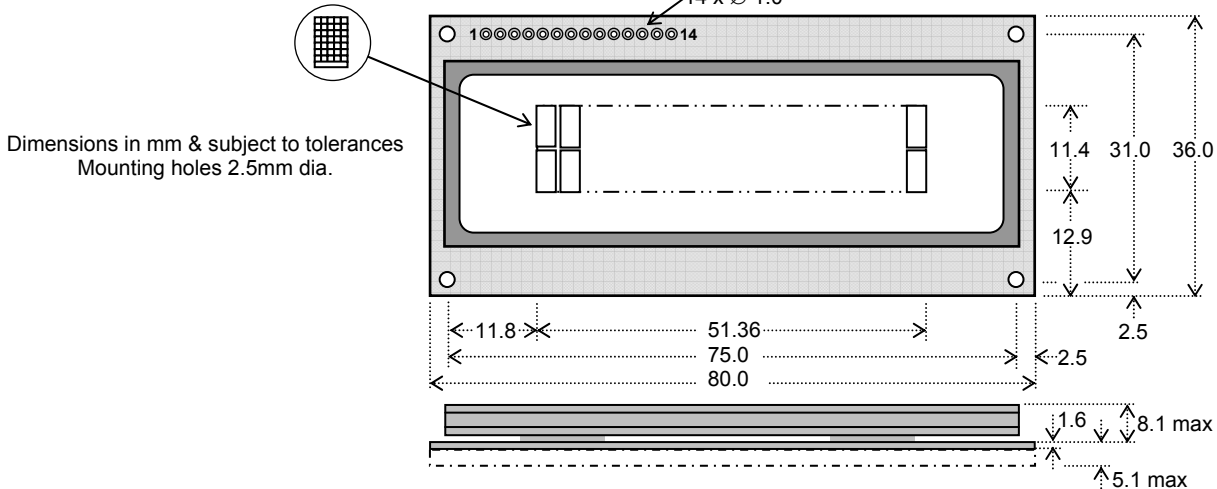

Dimensions in mm & subject to tolerances  
Mounting holes 2.5mm dia.

## ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	V <sub>CC</sub>	5.0VDC +/- 5%	GND=0V
Power Supply Current	I <sub>CC</sub>	150mADC typ.	V <sub>CC</sub> =5V
Logic High Input	V <sub>IH</sub>	2.0VDC min.	V <sub>CC</sub> =5V
Logic Low Input	V <sub>IL</sub>	0.8VDC max.	V <sub>CC</sub> =5V
Logic High Output	V <sub>OH</sub>	V <sub>CC</sub> -0.8VDC min.	I <sub>OH</sub> = -4mA
Logic Low Output	V <sub>OL</sub>	0.6VDC max.	I <sub>OL</sub> = 4mA

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x I<sub>CC</sub>. The I<sub>CC</sub> current is 10mA maximum while in power down mode.

## OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Character Size/Pitch (XxY mm)	2.275 x 4.759/3.275 x 5.991
Dot Size/Pitch (XxY mm)	0.359 x 0.577/0.479 x 0.697
Luminance	700 cd/m <sup>2</sup> (204 fL) Typ.
Colour of Illumination	Blue-Green (Filter for more colours)
Operating Temperature	-40°C to +85°C
Storage Temperature	-50°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

## SOFTWARE COMMANDS

Instruction	R/W	RSD0-D7
Clear Display	L	L 01H
Cursor Return Home	L	L 02H-03H
Entry Mode Set	L	L 04H-07H
Display ON/OFF	L	L 08H-0FH
Cursor/Display Shift	L	L 10H-1FH
Function Set	L	L 20H-3FH
Brightness Set	L	H 00H-03H
Set CG RAM Addr.	L	L 40H-7FH
Set DD RAM Addr.	L	L 80H-E7H
Read BUSY/Addr.	H	L 00H-FFH
Write Data to RAM	L	H 00H-FFH
Read Data from RAM	H	H 00H-FFH

## TIMING PARAMETERS (min)

(E)nable Cycle Time	500ns
(E)nable Pulse Width	230ns
Hold after (E)nable	10ns

## PIN CONNECTIONS (CN3)

Pin	Sig	Pin	Sig
1	GND	2	V <sub>CC</sub>
3	(FNC)	4	RS
5	R/W #	6	E #
7	DB0	8	DB1
9	DB2	10	DB3
11	DB4	12	DB5
13	DB6	14	DB7

## PIN CONNECTIONS (CN1)

Pin	Sig	Pin	Sig
1	V <sub>CC</sub>	4	STB
2	SI/SO	5	SCK
3	GND	6	NC

## CHARACTER FONT

Hex	00	10	20	30	40	50	60	70	80	90	A0	B0	C0	D0	E0	F0
00			0	1	2	3	4	5	6	7	8	9	A	B	C	D
01			!	"	#	\$	%	&	'	(	)	*	+	,	-	.
02			"	2	B	R	b	r	Δ	E	r	ι	υ	×	β	θ
03			#	3	C	S	c	s	Δ	R	ι	υ	×	β	θ	ω
04			\$	4	D	T	d	t	Δ	#	\	/	I	l	†	‡
05			%	5	E	U	e	u	E	o	.	7	†	‡	§	¶
06			&	6	F	V	f	v	Δ	+	7	†	‡	§	¶	ζ
07			'	7	G	W	g	w	Δ	+	7	†	‡	§	¶	η
08			(	8	H	X	h	x	Δ	!	ι	υ	×	β	θ	ξ
09			)	9	I	Y	i	y	Δ	φ	ψ	ω	π	ρ	σ	τ
0A			*	:	J	Z	j	z	Δ	±	∩	∪	∩	∪	∩	∪
0B			+	;	K	k	<	>	Δ	±	∩	∪	∩	∪	∩	∪
0C			,	<	L	l	∩	∪	Δ	±	∩	∪	∩	∪	∩	∪
0D			-	=	M	m	>	?	Δ	±	∩	∪	∩	∪	∩	∪
0E			.	>	N	n	→	*	Δ	±	∩	∪	∩	∪	∩	∪
0F			Δ	/	?	0	←	Δ	±	∩	∪	∩	∪	∩	∪	∩

## JUMPER LINKS

### # Interface M68/i80

When jumper link JP2 is soldered, these inputs change to i80 series CPU control lines.

Pin 5 = /WR Pin 6 = /RD

### Pin 3 (Fnc) Input

This is normally open circuit. If pads JP1.1 and JP1.2 are linked. Pin 3 = /Reset.

### JP6

If JP6 is open, Parallel mode is selection. If JP6 is linked serial mode selected.

## CONTACT

**Noritake Sales Office Tel Nos**  
 Nagoya Japan: +81 (0)52-561-9867  
 Canada: +1-416-291-2946  
 Chicago USA: +1-847-439-9020  
 Munchen (D): +49 (0)89-3214-290  
 Itron UK: +44 (0)1493 601144  
 Rest Europe: +49 (0)61-0520-9220  
[www.noritake-iron.com](http://www.noritake-iron.com)

Subject to change without notice.  
 IUK Doc Ref: 38994 Iss:1 28Aug08

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Vacuum Fluorescent Displays - VFD category](#):*

*Click to view products by [Noritake manufacturer](#):*

Other Similar products are found below :

[M0220SD-202SDAR1-CWC](#) [GU256X64F-9900](#) [GU140X16G-7003B](#) [GU140X32F-7003B](#) [CU20049-UW2A](#) [CU16025-UW6J](#) [CU20029-UW1J](#) [GU140X32F-7000B](#) [VFD2041](#) [VFD2041-VPT](#) [VK162-12](#) [VK162-12-E](#) [VK202-25](#) [VK204-25](#) [VK204-25-E](#) [M0216SD-162SDAR2-1](#) [M0216SD-162SDAR8](#) [M0220MD-202MDAR1-1](#) [M0220MD-202MDAR1-3](#) [CU20025-UW1J](#) [CU20045-UW5J](#) [CU20049-UW2J](#) [CU24063-Y1A](#) [CU40025-UW6J](#) [GU140X16G-7003](#) [VK202-25-V](#) [GU256X128E-3900B](#) [M0220SD-202SDAR1-1G](#) [GP1184A01A](#) [M162MD07AA-000](#) [VK202-25-V-E](#)