


GT800X480A-C903PA

SIMPLIFIED DATASHEET

■ Features

- 7 inch TFT-LCD
- LED backlight module
- Wide-VGA: 800 x RGB x 480 pixels
- High brightness (850cd/m2)
- FLETAS capacitive touch panel [Features of FLETAS]
 - High sensitivity
 - Excellent noise resistance

■ Physical Dimensions

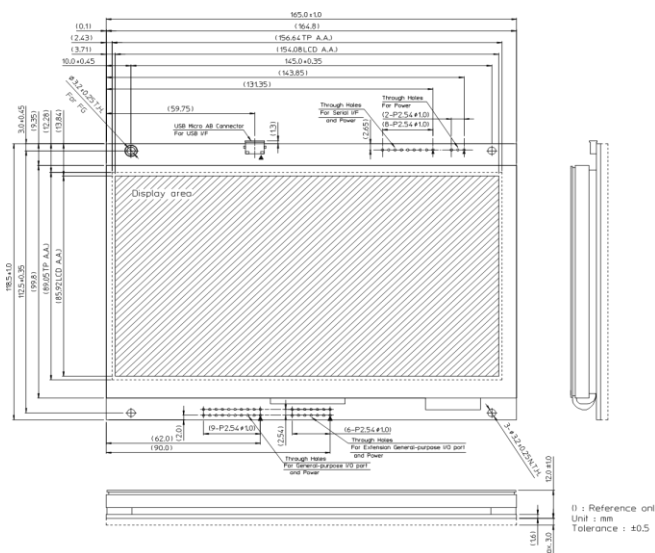

Get full specification

[Click here to go to request form.](#)

Specifications

■ Basic Specification

Item	Content	
Display	Display Area	154.08 x 85.92 mm (X x Y)
	Number of Pixels	800 x RGB x 480
	Pixel Pitch	0.1926 x 0.179 mm (X x Y)
	Colors	6.5k colors (16-bit color (RGB 5-5-5+1bit intensity))
	Viewing Direction	12 o'clock
	Gray Scale Inversion Direction	6 o'clock
	Brightness (100%)	Min. 500 cd/m2 (nit) Typ. 850 cd/m2 (nit)
FLETAS Touch Panel	Type	MPCT (Metallised Projective Capacitive Touch) multi-touch support
	Interface	Serial interface (UART / I2C / SPI CMOS 3.3V)
Other	Interface	USB interface (High-speed / Full-speed)
	Weight	Approximately 267g

■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power Supply Voltage	VCC	4.75	5.00	5.25	VDC	-

■ Electrical Characteristics

Measuring Conditions: Ambient temperature = 25 °C, VCC=5.0VDC

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition	
UART	Logic output voltage TXD,DTR	VsOH1	2.8	-	-	VDC	IOH=-1.6mA IOL=1.6mA
	Logic output voltage TRDY, SBusY	VsOH2	2.8	-	-	VDC	
I2C I/F	Logic output voltage TRDY, SBusY	VsOL2	-	-	0.4	VDC	
SPI	Internal pull-up resistance SDA, SCL	Rp	-	10	-	kΩ	-
	Logic output voltage TXD,DTR,MISO	VsOH3 VsOL3	2.8 -	- -	- 0.4	VDC	IOH=-1.6mA IOL=1.6mA
GPIO Port	Logic input current	IiIH IiIL	- -	- -	1.0 -200	μADC	- -
	Logic input voltage	ViiH ViiL	2.4 -	- -	- 0.8	VDC	- -
	Logic output voltage	ViOH ViOL	2.8 -	- -	- 0.4	VDC	IOH=-200 μA IOL=1.6mA
	Output permissible current	IiOHp IiOLp IiOHT IiOLt	- - - -	- - - -	-5 5 -80 80	mADC	(Single port) (Sum of all port)
Power Supply Current 1	ICC1	-	720	940	mADC	(*1) 100% Brightness	
Power Supply Current 2	ICC2	-	460	600	mADC	(*1) 50% Brightness	
Power Supply Current 3	ICC3	-	230	300	mADC	Display OFF	
Power Consumption		-	3.60	4.70	W	(*1) 100% Brightness	
		-	2.30	3.00	W	(*1) 50% Brightness	

(*1) Display power ON

■ Interface Details / Connectors

• Serial Interface (UART / I2C / SPI CMOS 3.3V) [CN9]

Pin No.	Signal			Function	Direction
	UART	SPI	I2C		
1	-	-	-	/RESET	Input
2	-	SCK	SCL	Serial Clock	Input
3	RXD	MOSI	SDA	Data Receive	Input/ Output
4	DTR	SBusY		Display Busy	Output
5	DSR	SSEL	-	Host Busy	Input
6	TXD	MISO	-	Data Send	Output
7	TRDY			Target Ready	Output
8	VCC			Power Supply (5V)	-
9	GND			Ground	-

• USB Interface [CN3]

Pin No.	Signal
1	VBUS
2	D-
3	D+
4	ID
5	GND

• Power Through-holes [CN8]

Pin No.	Signal	Function
1	VCC	Power Supply (5V)
2	NC(*TEST)	No Connection
3	GND	Ground

NOTE: Shorting JP1 enables power supply from VBUS.
*Factory test use only

• General Purpose I/O & Power Through-holes [CN10][CN11]

Please see the Hardware Specification for details.

■ Environmental Specifications

Parameter	Contents
Operating Temperature	-20 to +70°C
Storage Temperature	-30 to +80°C
Operating Humidity	Temp. ≤60 °C, 80% RH MAX. Temp. > 60 °C, Absolute humidity shall be less than 80% RH at 60 °C
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

■ Selectable Font

Parameter	Contents
1-byte(dot)	6x8, 8x16, 12x24, 16x32, International font
2-byte(dot)	16x16 (Japanese/Korean/SimplifiedChinese/TraditionalChinese), 32x32(Japanese)
Outline Font	Source Han Sans

■ Functions

Character display, graphic display, control command, display action command, window function, touch panel input, general-purpose I/O port control, macro, program macro function, character and image download function, memory SW, data storage, etc.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TFT Displays & Accessories category](#):

Click to view products by [Noritake manufacturer](#):

Other Similar products are found below :

[F3ET2-005-150](#) [HDA430T-3G1H](#) [NL6448BC20-21D](#) [NB7W-KBA04](#) [NB-ATT01](#) [NB5Q-ATT01](#) [NB5Q-KBA04](#) [NB-CN001](#) [OAI-80038AA-2008-A](#) [315-U004B15300](#) [UMSH-8596MD-34T \(REV D\)](#) [TCG121WXLRXVNNANX35](#) [EIC-LCD-1080P](#) [T-55619GD065J-LW-ABN](#) [TCG104SVLPEANN-AN30](#) [NL6448BC33-70](#) [NL6448BC20-30D](#) [NL10276BC16-06](#) [NL192108AC10-01D](#) [NL12880BC20-05BD](#) [NL8060BC26-35BA](#) [NL8060BC31-50F](#) [TM070DDHG03-40](#) [NL10276AC30-42C](#) [PTPW16-070WV1S02](#) [PTPW17-070WV1S02](#) [PTPW16-084SV1S02](#) [MTD0300ECP06DF-1](#) [DEM 320240T VMX-PW-N \(A-TOUCH\)](#) [DEM 480128B TMH-PW-N \(A-TOUCH\)](#) [DEM 480272P VMX-PW-N \(C-TOUCH\)](#) [DEM 480272Q VMX-PW-N \(A-TOUCH\)](#) [DEM 480272Q VMX-PW-N \(C-TOUCH\)](#) [DEM 640480E TMH-PW-N \(A-TOUCH\)](#) [DEM 800480K1 TMH-PW-N \(A-TOUCH\)](#) [DEM 800480K1 TMH-PW-N \(C-TOUCH\)](#) [DEM 800480K2 TMH-PW-N \(A-TOUCH\)](#) [DEM 800480K3 TMH-PW-N \(C-TOUCH\)](#) [DEM 800480K4 TMH-PW-N \(A-TOUCH\)](#) [DEM 800480K4 TMH-PW-N \(C-TOUCH\)](#) [4DLCD-35480320-CTP-IPS](#) [4DLCD-35480320-IPS](#) [4DLCD-35480320-RTP-IPS](#) [4DLCD-50800480-CTP-IPS](#) [RFA6400E-AWH-DNG](#) [RFA6400E-AWH-MNN](#) [RFE430V-AZW-DNS](#) [RFF70VA2-1IW-DHS](#) [RFH700A8-AYH-MNN](#) [RFK101VF-1YH-LHG](#)