

NTE116 General Purpose Silicon Rectifier

Description:


The NTE116 is a general purpose silicon rectifier in a DO-41 case designed for low power and switching applications.

Absolute Maximum Ratings:

Peak Repetitive Reverse Voltage, V_{RRM}	600V
Working Peak Reverse Voltage, V_{RWM}	600V
DC Blocking Voltage, V_R	600V
Non-Repetitive Peak Reverse Voltage (Halfwave, Single Phase, 60Hz), V_{RSM}	720V
RMS Reverse Voltage, $V_{R(RMS)}$	420V
Average Rectified Forward Current, I_O (Single Phase, Resistive Load, 60Hz, $T_A = +75^\circ\text{C}$)	1A
Non-Repetitive Peak Surge Current, I_{FSM} (Surge applied at rated load conditions for 1 cycle)	30A
Operating Junction Temperature Range, T_J	-65° to $+175^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65° to $+175^\circ\text{C}$
Maximum Lead Temperature, T_L (During Soldering, 3/8" from case for 10sec at 5lbs tension)	$+350^\circ\text{C}$

Electrical Characteristics:

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Instantaneous Forward Voltage Drop	v_F	$i_F = 1\text{A}, T_J = +25^\circ\text{C}$	–	0.93	1.1	V
Maximum Full-Cycle Average Forward Voltage Drop	$V_{F(AV)}$	$I_O = 1\text{A}, T_L +75^\circ\text{C}, 1''$ leads	–	–	0.8	V
Maximum Reverse Current	I_R	$V_{RRM} = 600\text{V}, T_J = +25^\circ\text{C}$	–	0.05	10	μA
		$V_{RRM} = 600\text{V}, T_J = +100^\circ\text{C}$	–	1.0	50	
Maximum Full-Cycle Average Reverse Current	$I_{R(AV)}$	$I_O = 1\text{A}, T_L +75^\circ\text{C}, 1''$ leads	–	–	30	μA

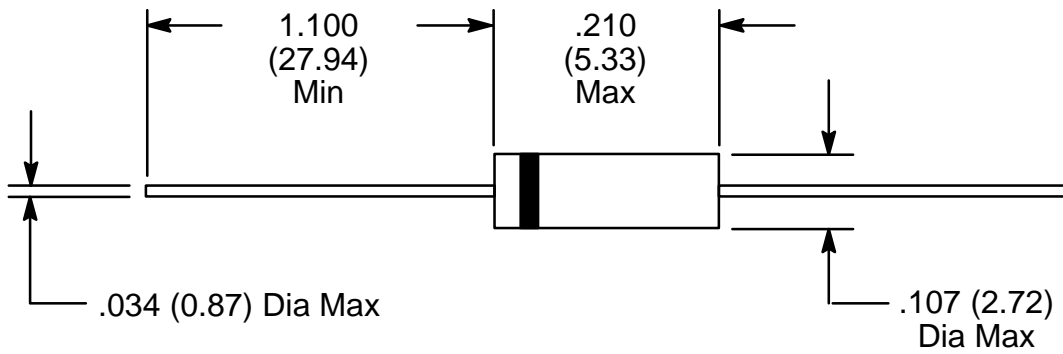

Color Band Denotes Cathode

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)
[5615](#) [591](#) [7056](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [NTE528](#) [NTE542](#) [NTE74154](#)
[04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-](#)
[SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-](#)
[SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#) [04-ESNF-500L](#) [04-SL.625-R-5](#) [04-SCW5C-WH](#)
[04-ESNF-1000L](#)