

NTE156 General Purpose Silicon Rectifier

Features:

- Low Leakage
- Low Forward Voltage Drop
- High Current Capability


Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%)

Peak Repetitive Reverse Voltage, V_{RRM}	1000V
DC Blocking Voltage, V_R	1000V
RMS Reverse Voltage, $V_{R(RMS)}$	700V
Average Rectified Forward Current, I_O (.375" (9.5mm) lead length, $T_A = +50^\circ\text{C}$)	2A
Non-Repetitive Peak Surge Current, I_{FSM} (8.3ms single half sine-wave superimposed on rated load)	70A
Operating Junction Temperature Range, T_J	-65° to $+175^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65° to $+175^\circ\text{C}$
Typical Thermal Resistance, Junction-to-Ambient, R_{thJA}	50°C/W

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Instantaneous Forward Voltage Drop	V_F	$I_F = 2A$	-	-	1.1	V
Maximum Reverse Current	I_R	$V_{RRM} = 1000V, T_J = +25^\circ\text{C}$	-	-	5.0	μA
		$V_{RRM} = 1000V, T_J = +100^\circ\text{C}$	-	-	50	
Maximum Full-Cycle Average Reverse Current	$I_{R(AV)}$	$T_L +75^\circ\text{C}, .375 (9.5) \text{ leads}$	-	-	30	μA
Typical Junction Capacitance	C_j	Note 1	-	40	-	pF

Note 1. Measured at 1MHz and applied reverse voltage of 4.0 volts.

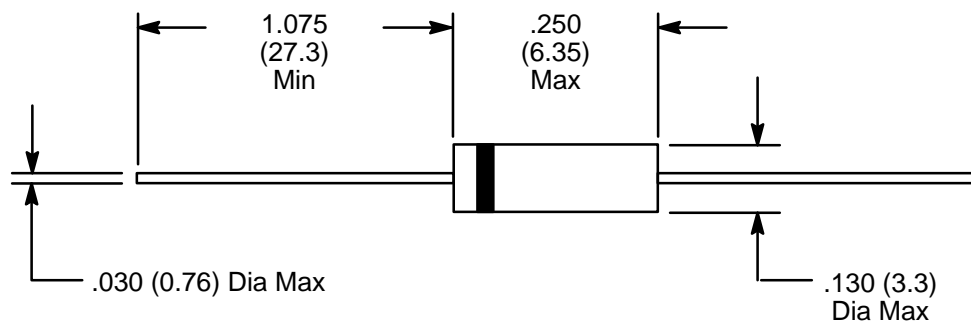

Color Band Denotes Cathode

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)
[5615](#) [591](#) [7056](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [NTE528](#) [NTE542](#) [NTE74154](#)
[04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-](#)
[SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-](#)
[SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#) [04-ESNF-500L](#) [04-SL.625-R-5](#) [04-SCW5C-WH](#)
[04-ESNF-1000L](#)